
**Ships and marine technology — Marine
radar reflectors —**

**Part 2:
Active type**

*Navires et technologie maritime — Réflecteurs radars de marine —
Partie 2: Type actif*



Reference number
ISO 8729-2:2009(E)

AVA Documents
Document Sharing Hub
© ISO 2009

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Construction.....	3
4.1 General arrangement.....	3
4.2 Structure and materials.....	4
4.3 Enclosed size of the reflector.....	4
4.4 Mass of the reflector.....	4
5 Performance	4
5.1 Functionality.....	4
5.2 Reflecting pattern	4
5.3 Time delay and stretching	5
5.4 Polarisation	5
5.5 Stability and self-oscillation	5
5.6 Maximum power.....	6
5.7 Tolerance to a radar in close proximity.....	6
6 Environmental requirements	6
7 Inspection and type tests.....	6
7.1 Inspection	6
7.2 Testing	6
7.3 Performance tests.....	6
7.4 Environmental tests.....	12
7.5 Mechanical strength test.....	13
7.6 Electromagnetic emission tests.....	13
7.7 Electromagnetic immunity tests	13
7.8 Spurious emissions tests	13
8 Installation	13
8.1 Method	13
8.2 Positioning	13
8.3 Mounting height.....	14
8.4 Mass	14
8.5 Size.....	14
9 Manual.....	14
10 Marking	15
Annex A (normative) Guidance notes for the installation of active radar reflectors	16
Annex B (normative) Test method for unwanted emissions of active radar reflectors	18
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8729-2 was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 6, *Navigation and ship operations*.

ISO 8729 consists of the following parts, under the general title *Ships and marine technology — Marine radar reflectors*:

- *Part 1: Passive type*
- *Part 2: Active type*

Ships and marine technology — Marine radar reflectors —

Part 2: Active type

1 Scope

It is recognised that small vessels, often made of glass fibre reinforced plastic (GRP), can be poor reflectors of radar signals. In situations where radar is the prime observation tool used by ships at sea, the International Maritime Organisation considers that it is essential that small vessels, considered in this context to be those under 150 gross tonnage, be equipped with a radar reflector to enhance their radar return and thus improve their visibility to radar.

This International Standard specifies the minimum requirements for a radar reflector intended to enhance returns from small vessels as required by IMO Resolution MSC.164(78).

It provides the specification for the construction, performance, testing, inspection and installation of such radar reflectors.

NOTE Requirements that have been extracted from IMO Resolution MSC.164(78) *Revised performance standards for radar reflectors* are printed in italics.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17025, *General requirements for the competence of testing and calibration laboratories*

IEC 60945, *Marine navigation and radiocommunication equipment and systems — General requirements — Methods of testing and required test results*

ITU-R SM.329, *Unwanted emissions in the spurious domain*

ITU-R SM.1541, *Unwanted emissions in the out-of-band domain*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

radar reflector

device that is designed to enhance radar returns from vessels with small radar cross section

3.2

active radar reflector

device that receives, amplifies and retransmits a radar signal as a method of enhancing radar returns

NOTE An active radar reflector is often also known as a radar target enhancer (RTE).

3.3

radar cross section

RCS

equivalent echoing area which is 4π times the ratio of the power per unit solid angle scattered in a specified direction to the power per unit area in a plane wave incident on the scatterer from a specified direction

NOTE It is dependent on the radar operating frequency and the three-dimensional orientation of the reflector. Polarization of the transmitter and the received wave affects the effective radar cross section of the reflector.

3.4

azimuthal polar diagram

polar diagram providing the RCS of the reflector with respect to its azimuthal angle

NOTE These diagrams can be produced for any angle of heel.

3.5

null

pronounced fall-off of RCS in the azimuthal polar diagram

3.6

stated performance level

SPL

performance level calculated from measurement data sets (i.e. azimuthal polar diagrams) taken during technical measurements of reflective performance

NOTE 1 SPL is the RCS value at which a null is 10° wide (see Figure 1). If there is more than one null with a width of at least 10° , then SPL is the lowest such value.

NOTE 2 If the azimuthal polar diagram does not show a null (as defined in 3.5) that is 10° wide, then the SPL is the RCS which is achieved over 280° of azimuth.

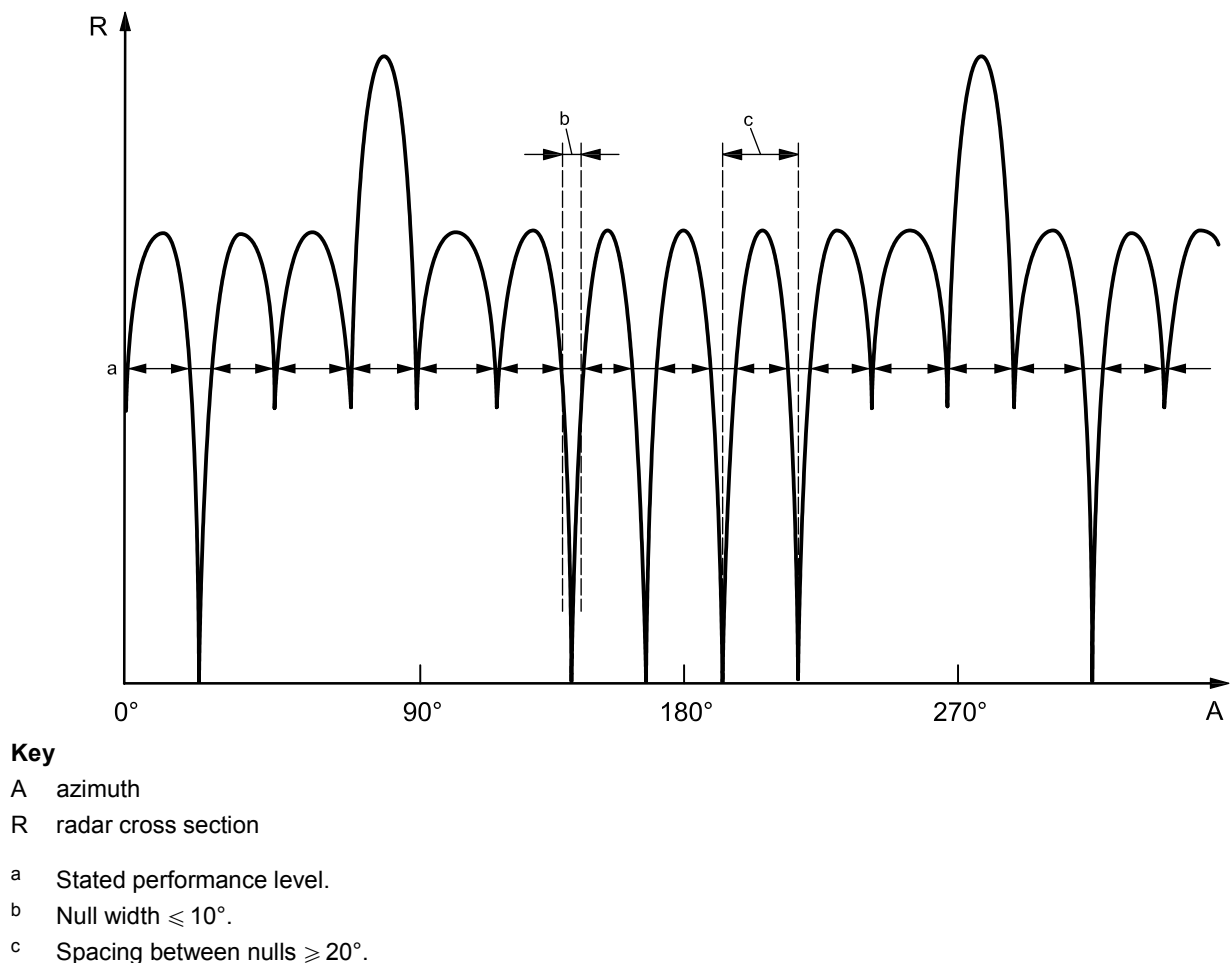


Figure 1 — Definition of stated performance level

3.7

self-oscillation

phenomenon whereby the receive and transmit antennas of an active reflector are unintentionally coupled, either inherently or by a reflecting surface closeby, so that feedback occurs between the two

NOTE Devices that are self-oscillating are also said to be unstable.

3.8

saturation

state whereby an active radar reflector is emitting the maximum power of which it is capable

NOTE 1 This power at which saturation occurs is known as the saturated power.

NOTE 2 The distance from the interrogating radar at which saturation occurs is a function of the power of the radar, the total gain of the reflector and the maximum power of the reflector.

4 Construction

4.1 General arrangement

The active radar reflector shall consist of a receive antenna (or antennas), an amplifier (or amplifiers) capable of operation across the X and S bands and a transmit antenna (or antennas). Typically there may also be an

associated control box whose function is to switch the device on and off and to indicate to the user that the device is working.

4.2 Structure and materials

The materials used for the radar reflector shall be of sufficient strength and quality as to make the reflector capable of maintaining reflection performance under the conditions of stress due to sea states, vibration, humidity and change of temperature likely to be experienced in the marine environment. Use of ferrous metals should be avoided.

4.3 Enclosed size of the reflector

The volume of the reflector should not exceed 0,05 m³.

4.4 Mass of the reflector

The reflector should weigh as little as practical in order to minimise its effect on the stability of small vessels.

5 Performance

5.1 Functionality

The active radar reflector shall receive a radar pulse, amplify it and retransmit it. The output shall only be an amplified version of the received pulse, without any form of processing except limiting.


5.2 Reflecting pattern

5.2.1 *The radar reflector shall have a stated performance level of at least 7,5 m² at X band (9,300 GHz to 9,500 GHz) and 0,5 m² at S band (2,900 GHz to 3,100 GHz). The SPL shall be maintained over a total angle of at least 280°.*

The response shall, at the calculated SPL for each azimuthal polar diagram,

- *not have any nulls wider than a single angle of 10°, and*
- *not have a distance between nulls of less than 20°. Nulls of less than 5° shall be ignored for this calculation.*

NOTE Typical azimuthal polar diagrams for an active radar reflector in X band at 0° and 10° elevation are given in Figure 2.

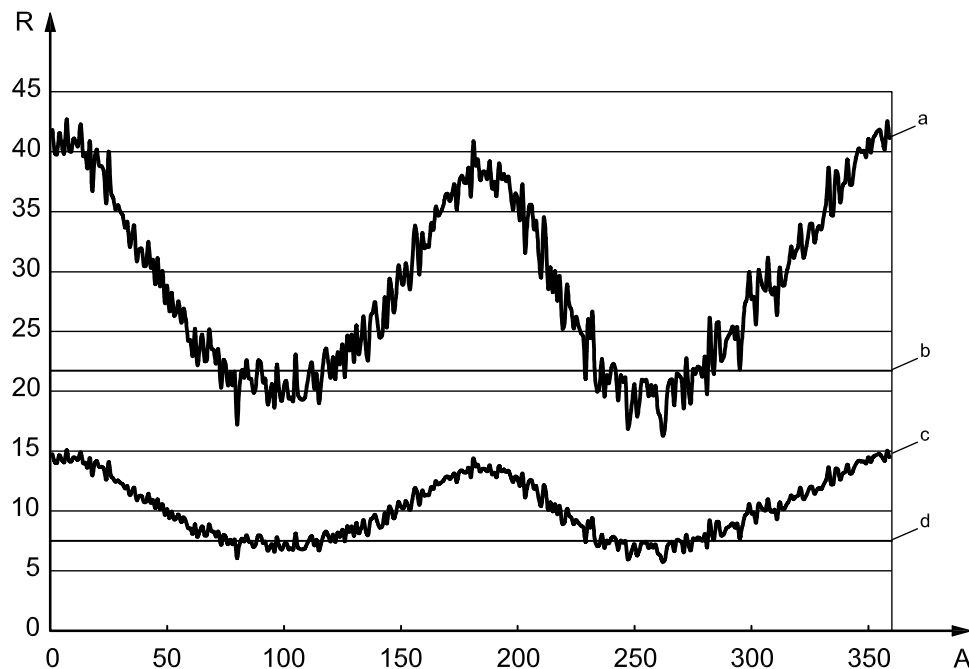

Key

- A azimuth
- R radar cross section, expressed in m^2
- a 0° elevation
- b stated performance level for $21,7 \text{ m}^2$
- c 10° elevation
- d stated performance level for $7,5 \text{ m}^2$

The 0° elevation response shows a calculated SPL of $21,7 \text{ m}^3$ for 280° azimuth coverage and the response at 10° elevation is calculated at $7,5 \text{ m}^3$, which is just compliant with respect to the minimum SPL requirement. These two plots also illustrate the expected antenna gain reduction with elevation change.

Figure 2 — Examples of typical RTE azimuthal polar diagrams and their associated SPL

5.2.2 For power-driven vessels and sailing vessels designed to operate with little heel (catamaran/trimaran), this performance shall be maintained through angles of (athwartships) heel 10° either side of vertical. For other vessels, the reflector shall maintain this performance over 20° either side of vertical.

5.3 Time delay and stretching

The time delay and stretching of the output shall not exceed 10 % of the length of the received pulse or 10 ns, whichever is greater.

5.4 Polarisation

The active reflector shall respond to radar using horizontal polarisation in both X and S bands. For S band, the active reflector may use circular polarised antennas for receiving and transmitting.

5.5 Stability and self-oscillation

The active reflector shall be inherently stable and it shall not be possible for instability to be induced under any conditions. Stability shall be demonstrated by the tests specified in 7.3.4 and 7.3.5.