

INTERNATIONAL STANDARD

ISO/IEC 10089

First edition
1991-05-01

Information technology — 130 mm rewritable optical disk cartridge for information interchange

*Technologies de l'information — Cartouches de disques optiques réutilisables à
diamètre 130 mm pour l'échange d'information*



Reference number
ISO/IEC 10089-1:1991(E)



Documents
Document Sharing Hub

Contents

	Page
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Conventions and notations	1
5 List of acronyms	2
6 Definitions	2
6.1 case	2
6.2 Clamping Zone	2
6.3 Control Track	2
6.4 cyclic redundancy check (CRC)	2
6.5 defect management	2
6.6 disk reference plane	2
6.7 entrance surface	2
6.8 error correction code (ECC)	2
6.9 format	2
6.10 hub	3
6.11 interleaving	3
6.12 Kerr rotation	3
6.13 land and groove	3
6.14 mark	3
6.15 optical disk	3
6.16 optical disk cartridge (ODC)	3
6.17 polarization	3
6.18 pre-recorded mark	3
6.19 read power	3
6.20 recording layer	3

© ISO/IEC 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

6.21	Reed-Solomon code	3
6.22	rewritable optical disk	3
6.23	spindle	3
6.24	substrate	3
6.25	track	3
6.26	track pitch	3
6.27	write-inhibit hole	3
7	General description	4
8	Environments	4
8.1	Testing environment	4
8.2	Operating environment	4
8.3	Storage environment	4
	8.3.1 Short-term storage	5
	8.3.2 Long-term storage	5
8.4	Transportation	5
9	Safety requirements	5
10	Dimensional and mechanical characteristics of the case	5
10.1	General	5
10.2	Case drawings	5
10.3	Sides, reference axes and reference planes	6
	10.3.1 Relationship of Sides A and B	6
	10.3.2 Reference axes and case reference planes	6
10.4	Materials	6
10.5	Mass	6
10.6	Overall dimensions (see figure 3)	6
10.7	Location hole (see figure 3)	7
10.8	Alignment hole (see figure 3)	7
10.9	Surfaces on reference planes P (see figures 4 and 4a)	8
10.10	Insertion slots and detent features (see figure 5)	9
10.11	Gripper slots (see figure 6)	9
10.12	Write-inhibit holes (see figure 7)	10
10.13	Media sensor holes (see figure 8)	10
10.14	Head and motor window (see figure 10)	11
10.15	Shutter (see figure 11)	11
10.16	Slot for shutter opener (see figure 11)	11
10.17	Shutter sensor notch (see figure 9)	12
10.18	User label areas (see figure 13)	12
11	Dimensional and physical characteristics of the disk	13
11.1	Dimensions of the disk	13
	11.1.1 Outer diameter	13
	11.1.2 Thickness	13

	11.1.3	Clamping zone (see figure 1)	13
	11.1.4	Clearance zone	13
11.2		Mass	13
11.3		Moment of inertia	13
11.4		Imbalance	13
11.5		Axial deflection	13
11.6		Axial acceleration	13
11.7		Dynamic radial runout	13
11.8		Radial acceleration	14
11.9		Tilt	14
12		Drop test	14
13		Interface between disk and drive	14
	13.1	Clamping technique	14
	13.2	Dimensions of the hub (see figure 1)	14
	13.2.1	Outer diameter of the hub	14
	13.2.2	Height of the hub	14
	13.2.3	Diameter of the centre hole	14
	13.2.4	Height of the top of the centre hole at diameter D9	14
	13.2.5	Centring length at diameter D9	15
	13.2.6	Chamfer at diameter D9	15
	13.2.7	Chamfer at diameter D8	15
	13.2.8	Outer diameter of the magnetizable ring	15
	13.2.9	Inner diameter of the magnetizable ring	15
	13.2.10	Thickness of the magnetizable material	15
	13.2.11	Position of the top of the magnetizable ring relative to the disk reference plane	15
	13.3	Magnetizable material	15
	13.4	Clamping force	15
	13.5	Capture cylinder for the hub (see figure 12)	15
	13.6	Disk position in the operating condition (see figure 12)	16
14		Characteristics of the substrate	31
	14.1	Index of refraction	31
	14.2	Thickness	31
15		Characteristics of the recording layer	31
	15.1	Test conditions	31
	15.1.1	General	31
	15.1.2	Read conditions	31
	15.1.3	Write conditions	32
	15.1.4	Erase conditions	32
	15.2	Baseline reflectance	33
	15.2.1	General	33
	15.2.2	Actual value	33

	15.2.3	Requirement	33
15.3		Magneto-optical recording in the User Zone	33
	15.3.1	Resolution	33
	15.3.2	Imbalance of magneto-optical signal	34
	15.3.3	Figure of merit for magneto-optical signal	34
	15.3.4	Narrow-band signal-to-noise ratio	34
	15.3.5	Cross-talk ratio	35
	15.3.6	Ease of erasure	35
16.		Features common to both formats	36
	16.1	Track geometry	36
		16.1.1 Track shape	36
		16.1.2 Direction of rotation	36
		16.1.3 Track pitch	36
		16.1.4 Track number	36
	16.2	Formatted Zone	36
	16.3	Control tracks	37
	16.4	Control Track PEP Zone	37
		16.4.1 Recording in the PEP Zone	37
		16.4.2 Cross-track loss	38
		16.4.3 Format of the tracks of the PEP Zone	39
	16.5	Control Track SFP Zones	42
		16.5.1 Duplicate of the PEP information	43
		16.5.2 Media information	43
		16.5.3 System Information	51
		16.5.4 Unspecified content	51
	16.6	Requirements for interchange of a user-recorded cartridge	51
		16.6.1 Requirements for reading	51
		16.6.2 Requirements for writing and erasing	51
17		Format A	51
	17.1	Track layout	51
		17.1.1 Tracking	51
		17.1.2 Characteristics of pre-recorded information	52
	17.2	Sector format	54
		17.2.1 Sector Mark (SM)	56
		17.2.2 VFO areas	56
		17.2.3 Address Mark (AM)	56
		17.2.4 ID and CRC	56
		17.2.5 Postamble (PA)	57
		17.2.6 Offset Detection Flag (ODF)	57
		17.2.7 Gap	57
		17.2.8 Flag	57
		17.2.9 Auto Laser Power Control (ALPC)	57

	17.2.12	Buffer	58
17.3		Recording Code	58
17.4		Defect management	59
	17.4.1	Media initialization	59
	17.4.2	Write and read procedure	60
	17.4.3	Layout of the User Zone	60
	17.4.4	Summary of the location of the zones on the disk	64
18		Format B	66
	18.1	Track layout	66
	18.1.1	Servo format	66
	18.1.2	Properties of pre-recorded signals	67
	18.2	Data structure	67
	18.2.1	Track format	67
	18.2.2	Sector format	67
	18.2.3	Error detection and correction	69
	18.2.4	Recording method	70
	18.2.5	Defect management	73
Annexes			
A	Optical systems for measuring write, read and erase characteristics		79
B	Definition of write and erase pulse width		81
C	Measurement of figure of merit		82
D	Values to be implemented in future standards		83
E	Pointer fields		84
F	CRC for ID fields		85
G	Interleave, CRC, ECC, Resync for the Data field		86
H	Sector retirement guidelines		93
I	Office environment		93
J	Transportation		94
K	Requirements for interchange		95

FOREWORD

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 10089 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

Annexes A, B, C, E, F, G and K form an integral part of this International Standard. Annexes D, H, I and J are for information only.

INTRODUCTION

This International Standard specifies the characteristics of 130 mm optical disk cartridges (ODC) of the type providing for information to be written, read and erased many times using the magneto-optical effect.

This International Standard together with a standard for volume and file structure provides for full data interchange between data processing systems.

Information technology — 130 mm rewritable optical disk cartridge for information interchange

1 Scope

This International Standard specifies

- definitions of the essential concepts;
- the environment in which the characteristics are to be tested;
- the environments in which the cartridge are to be operated and stored;
- the mechanical, physical and dimensional characteristics of the case and of the optical disk;
- the magneto-optical characteristics and the recording characteristics for recording the information, for reading the information and for erasing it many times, so as to provide physical interchangeability between data processing systems;
- two formats for the physical disposition of the tracks and sectors, the error correction codes, the modulation methods used for recording and the quality of the recorded signals.

2 Conformance

A 130 mm rewritable optical disk cartridge is in conformance with this International Standard if it meets all the mandatory requirements of clauses 8 to 16, and either those of clause 17 or those of clause 18.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid international standards.

ISO 683-13:1986, *Heat treatable steels, alloy steels and free-cutting steels - Wrought stainless steels.*

IEC 950:1986, *Safety of information technology equipment including electrical business equipment*

4 Conventions and notations

The following conventions and notations apply in this International Standard.

- a) In each field the information is recorded so that the most significant byte (byte 0) is recorded first. Within each byte the least significant bit is numbered bit 0, the most significant bit (i.e. bit 7 in an 8-bit byte) is recorded first. This order of recording applies also to the data input of the error-correcting codes, to the cyclic redundancy code, and to their code output.
- b) Unless otherwise stated, numbers are expressed in binary notation. Where hexadecimal notation is used, the hexadecimal digits are shown between parentheses.
- c) bit combinations are shown with the most significant bit to the left.
- d) Negative values are expressed in TWO's complement notation.
- e) The setting of bits is denoted by ZERO and ONE.

- f) The name of entities, e.g. specific tracks, fields, etc., is shown with a capital initial.

5 List of acronyms

ALPC	Auto Laser Power Control
AM	Address Mark
CAV	Constant Angular Velocity
CRC	Cyclic Redundancy Code
DDS	Disk Definition Structure
DMA	Defect Management Area
DMP	Defect Management Pointers
DTM	Defect Management Track
ECC	Error Correction Code
EDAC	Error Detection and Correction Code
ID	Identifier
LBA	Logical Block Address
ODC	Optical Disk Cartridge
ODF	Offset Detection Flag
PA	Postamble
PDL	Primary Defect List
PEP	Phase-Encoded Part of the Control Tracks
RLL(2,7)	Run Length Limited (code)
R-S	Reed-Solomon (code)
R-S/LDC	Reed-Solomon Long Distance Code
SDL	Secondary Defect List
SFP	Standard Formatted Part of the Control Tracks
SM	Sector Mark
VFO	Variable Frequency Oscillator
4/15 (Modulation)	Conversion table of 8-bit bytes to 15-Channel bit representation on the disk

6 Definitions

For the purposes of this International Standard, the definitions given in ISO/IEC 9171-1 and the following definitions apply.

- 6.1 **case** : The housing for an optical disk, that protects the disk and facilitates disk interchange.
- 6.2 **Clamping Zone** : The annular part of the disk within which the clamping force is applied by the clamping device. [ISO/IEC 9171-1]
- 6.3 **Control Track** : A track containing the information on media parameters and format necessary for writing, reading and erasing the remaining tracks on the optical disk. [ISO/IEC 9171-1]
- 6.4 **cyclic redundancy check (CRC)** : A method for detecting errors in data. [ISO/IEC 9171-1]
- 6.5 **defect management** : A method for handling the defective areas on the disk. [ISO/IEC 9171-1]
- 6.6 **disk reference plane** : A plane defined by the perfectly flat annular surface of an ideal spindle onto which the clamping zone of the disk is clamped, and which is normal to the axis of rotation. [ISO/IEC 9171-1]
- 6.7 **entrance surface** : The surface of the disk on to which the optical beam first impinges. [ISO/IEC 9171-1]
- 6.8 **error correction code (ECC)** : An error-detecting code designed to correct certain kinds of errors in data. [ISO/IEC 9171-1]
- 6.9 **format** : The arrangement or layout of the data on a medium. [ISO/IEC 9171-1]

- 6.10 hub** : The central feature on the disk which interacts with the spindle of the disk drive to provide radial centring and the clamping force. [ISO/IEC 9171-1]
- 6.11 interleaving** : The process of allocating the physical sequence of units of data so as to render the data more immune to burst errors. [ISO/IEC 9171-1]
- 6.12 Kerr rotation** : The rotation of the plane of polarization of an optical beam upon reflection from the recording layer as caused by the magneto-optical Kerr effect.
- 6.13 land and groove** : A trench-like feature of the disk, applied before the recording of any information, and used to define the track location. The groove is located nearer to the entrance surface than the land with which it is paired to form a track. [ISO/IEC 9171-1]
- 6.14 mark** : A feature of the recording layer which may take the form of a magnetic domain, a pit, or any other type or form that can be sensed by the optical system. The pattern of marks represents the data on the disk.
- 6.15 optical disk** : A disk that will accept and retain information in the form of marks in a recording layer, that can be read with an optical beam. [ISO/IEC 9171-1]
- 6.16 optical disk cartridge (ODC)**: A device consisting of a case containing an optical disk. [ISO/IEC 9171-1]
- 6.17 polarization** : The direction of polarization of an optical beam is the direction of the electric vector of the beam.
- NOTE 1 The plane of polarization is the plane containing the electric vector and the direction of propagation of the beam. The polarization is right-handed when to an observer looking in the direction of propagation of the beam, the end-point of the electric vector would appear to describe an ellipse in the clockwise sense.
- 6.18 pre-recorded mark** : A mark so formed as to be unalterable by magneto-optical means.
- 6.19 read power** : The read power is the optical power, incident at the entrance surface of the disk, used when reading.
- NOTE 2 It is specified as a maximum power that may be used without damage to the written data. Lower power may be used providing that the signal-to-noise ratio and other requirements of this International Standard are met.
- 6.20 recording layer** : A layer of the disk on, or in, which data is written during manufacture and/or use. [ISO/IEC 9171-1]
- 6.21 Reed-Solomon code** : An error detection and/or correction code which is particularly suited to the correction of errors which occur in bursts or are strongly correlated. [ISO/IEC 9171-1]
- 6.22 rewritable optical disk** : An optical disk in which the data in specified areas can be rewritten by an optical beam.
- 6.23 spindle** : The part of the disk drive which contacts the disk and/or hub. [ISO/IEC 9171-1]
- 6.24 substrate** : A transparent layer of the disk, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer.
- 6.25 track** : The path which is followed by the focus of the optical beam during one revolution of the disk. [ISO/IEC 9171-1]
- 6.26 track pitch** : The distance between adjacent track centrelines, measured in a radial direction. [ISO/IEC 9171-1]
- 6.27 write-inhibit hole** : A hole in the case which, when detected by the drive to be open, inhibits both write and erase operations.

7 General description

The optical disk cartridge which is the subject of this International Standard consists of a case containing an optical disk. An optical beam is used to write data to, or to read data from, or to erase data from, the disk using the magneto-optical Kerr effect.

The disk can be recorded either only on one side or on both sides.

The disk is intended for use in a drive with optical access from one side only. To gain access to the second side of a disk recordable on both sides, the cartridge must be reversed before insertion into the drive.

Typically a disk recordable on one side consists of a transparent layer acting as a substrate with a recording layer on one side and a hub on the other. The recording layer is accessed by an optical beam through the substrate. A disk recordable on both sides consists of two disks recordable on one side assembled together with the recording layers on the inside.

Other constructions are permitted but must have the same characteristics.

8 Environments

8.1 Testing environment

Unless otherwise specified, tests and measurements made on the ODC to check the requirements of this International Standard shall be carried out in an environment where the air immediately surrounding the ODC is within the following conditions.

Temperature	: 23 °C ± 2 °C
Relative humidity (RH)	: 45 % to 55 %
Atmospheric pressure	: 75 kPa to 105 kPa

Before testing, the ODC shall be conditioned in this environment for 48h minimum. No condensation on or in the ODC shall occur.

8.2 Operating environment

Optical disk cartridges used for data interchange shall be operated in an environment where the air immediately surrounding the ODC is within the following conditions.

Temperature	: 10 °C to 50 °C
Relative humidity	: 10 % to 80 %
Wet bulb temperature	: 29 °C max.
Atmospheric pressure	: 75 kPa to 105 kPa
Temperature gradient	: 10 °C /h max.
Relative humidity gradient	: 10 % /h max.
Magnetic field	: during loading and unloading of the cartridge the magnetic field strength at the recording layer shall not exceed 48 000 A/m.

No condensation on or in the ODC shall be allowed to occur.

If an ODC has been exposed during storage and/or transportation to conditions outside those specified in this clause, it shall be acclimatized in the operating environment for at least 2h before use. In the operating environment an ODC shall be capable of withstanding a thermal shock of up to 20 °C when inserted into, or removed from, the drive.

See also annex I.

8.3 Storage environment

Storage environment is the ambient condition to which the ODC without any additional protective enclosure is exposed when stored.

8.3.1 Short-term storage

For a maximum period of 14 consecutive days the ODC shall not be exposed to environmental conditions outside those given below.

Temperature	: -20 °C to 55 °C
Relative humidity	: 5 % to 90 %
Wet bulb temperature	: 29 °C max.
Atmospheric pressure	: 75 kPa to 105 kPa
Temperature gradient	: 20 °C /h max.
Relative humidity gradient	: 20 % /h max.
Magnetic field	: The magnetic field strength in the volume of the cartridge shall nowhere exceed 48 000 A/m

No condensation on or in the ODC shall be allowed to occur.

8.3.2 Long-term storage

For a storage period longer than 14 days the optical disk cartridge shall not be exposed to environmental conditions outside those given below.

Temperature	: -10 °C to 50 °C
Relative humidity	: 10 % to 90 %
Wet bulb temperature	: 29 °C max.
Atmospheric pressure	: 75 kPa to 105 kPa
Temperature gradient	: 15 °C /h max.
Relative humidity gradient	: 10 % /h max.
Magnetic field	: The magnetic field strength in the volume of the cartridge shall nowhere exceed 48 000 A/m

No condensation on or in the ODC shall be allowed to occur.

8.4 Transportation

This International Standard does not specify requirements for transportation; guidance is given in annex J.

9 Safety requirements

The cartridge and its components shall satisfy the safety requirements of IEC 950, when used in its intended manner or in any foreseeable use in an information processing system.

10 Dimensional and mechanical characteristics of the case**10.1 General**

The case shall be a rigid, protective enclosure of rectangular shape and include a shutter which uncovers access windows upon insertion into the drive, and automatically covers them upon removal from the drive. The case shall have means for positioning and identifying the cartridge, and write-inhibit holes.

The dimensions of the inside of the case are not specified in this International Standard, but are determined by the movement of the disk inside the case allowed by 13.5 and 13.6.

10.2 Case drawings

The case is represented schematically by the following drawings.

Figure 1 shows the hub dimensions.

- Figure 2 shows a composite drawing of Side A of the case in isometric form, with the major features identified from Side A.
- Figure 3 shows the envelope of the case with respect to a location hole at the intersection of the X and Y axes and reference plane P.
- Figure 4 shows the surfaces S1, S2, S3 and S4 which establish the reference plane P.
- Figure 4a shows the details of surface S3.
- Figure 5 shows the details of the insertion slot and detent.
- Figure 6 shows the gripper slots, used for automatic handling.
- Figure 7 shows the write-inhibit holes.
- Figure 8 shows the media ID sensor holes.
- Figure 9 shows the shutter sensor notch.
- Figure 10 shows the head and motor window.
- Figure 11 shows the shutter opening features.
- Figure 12 shows the capture cylinder.
- Figure 13 shows the user label areas.

10.3 Sides, reference axes and reference planes

10.3.1 Relationship of Sides A and B

The features essential for physical interchangeability are represented in figure 2. When Side A of the cartridge faces upwards, Side A of the disk faces downwards. Sides A and B of the case are identical as far as the features given here are concerned. The description is given for one side only. References to Sides A and B can be changed to B or A respectively.

Only the shutter and the slot for the shutter opener, described in 10.14 and 10.15 are not identical for both sides of the case.

10.3.2 Reference axes and case reference planes

There is a reference plane P for each side of the case. Each reference plane P contains two orthogonal axes X and Y to which the dimensions of the case are referred. The intersection of the X and Y axes defines the centre of the location hole. The X axis extends through the centre of the alignment hole.

10.4 Materials

The case shall be constructed from any suitable materials such that it meets the requirements of this International Standard.

10.5 Mass

The mass of the case without the optical disk shall not exceed 150 g.

10.6 Overall dimensions (see figure 3)

The total length of the case shall be

$$L_1 = 153,0 \text{ mm} \pm 0,4 \text{ mm}$$

The distance from the top of the case to the reference axis X shall be

$$L_2 = 127,0 \text{ mm} \pm 0,3 \text{ mm}$$

The distance from the bottom of the case to the reference axis X shall be

$$L_3 = 26,0 \text{ mm} \pm 0,3 \text{ mm}$$

The total width of the case shall be

$$L_4 = 135,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,6 \text{ mm} \end{array}$$

The distance from the left-hand side of the cartridge to the reference axis Y shall be

$$L_5 = 128,5 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,5 \text{ mm} \end{array}$$

The distance from the right-hand side of the cartridge to the reference axis Y shall be

$$L_6 = 6,5 \text{ mm} \pm 0,2 \text{ mm}$$

The width shall be reduced on the top by the radius

$$R_1 = L_4$$

originating from a point defined by L_5 and

$$L_7 = 101,0 \text{ mm} \pm 0,3 \text{ mm}$$

The two corners of the top shall be rounded with a radius

$$R_2 = 1,5 \text{ mm} \pm 0,5 \text{ mm}$$

and the two corners at the bottom with a radius

$$R_3 = 3,0 \text{ mm} \pm 1,0 \text{ mm}$$

The thickness of the case shall be

$$L_8 = 11,00 \text{ mm} \pm 0,30 \text{ mm}$$

The eight long edges of the case shall be rounded with a radius

$$R_4 = 1,0 \text{ mm max.}$$

10.7 Location hole (see figure 3)

The centre of the location hole shall coincide with the intersection of the reference axes X and Y. It shall have a square form with a side length of

$$L_9 = 4,10 \text{ mm} \begin{array}{l} + 0,00 \text{ mm} \\ - 0,06 \text{ mm} \end{array}$$

held to a depth of

$$L_{10} = 1,5 \text{ mm (i.e. typical wall thickness)}$$

after which a cavity extends through to the alignment hole on the opposite side of the case.

The lead-in edges shall be rounded with a radius

$$R_5 = 0,5 \text{ mm max.}$$

10.8 Alignment hole (see figure 3)

The centre of the alignment hole shall lie on reference axis X at a distance of

$$L_{11} = 122,0 \text{ mm} \pm 0,2 \text{ mm}$$

from the reference axis Y.

The dimensions of the hole shall be

$$L_{12} = 4,10 \text{ mm} \begin{array}{l} + 0,00 \text{ mm} \\ - 0,06 \text{ mm} \end{array}$$

and

$$L_{13} = 5,0 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

held to a depth of L_{10} , after which a cavity extends through to the location hole on the opposite side of the case.

The lead-in edges shall be rounded with radius R_5 .

10.9 Surfaces on reference planes P (see figures 4 and 4a)

The reference plane P for a side of the case shall contain four surfaces (S_1 , S_2 , S_3 and S_4) on that side of the case, specified as follows:

- Two circular surfaces S_1 and S_2 .

Surface S_1 shall be a circular area centred around the square location hole and have a diameter of

$$D_1 = 9,0 \text{ mm min.}$$

Surface S_2 shall be a circular area centred around the rectangular alignment hole and have a diameter of

$$D_2 = 9,0 \text{ mm min.}$$

- Two elongated surfaces S_3 and S_4 , that follow the contour of the cartridge and shutter edges.

Surfaces S_3 and S_4 are shaped symmetrically.

Surface S_3 shall be defined by two circular sections with radii

$$R_6 = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

with an origin given by

$$L_{14} = 4,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{15} = 86,0 \text{ mm} \pm 0,3 \text{ mm}$$

and

$$R_7 = 1,5 \text{ mm} \pm 0,1 \text{ mm}$$

with an origin given by

$$L_{16} = 1,9 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{17} = 124,5 \text{ mm} \pm 0,3 \text{ mm}$$

The arc with radius R_7 shall continue on the right hand side with radius

$$R_8 = 134,0 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,7 \text{ mm} \end{array}$$

which is a dimension resulting from $L_5 + L_{14} + R_6$ with an origin given by L_5 and L_7 . A straight, vertical line shall smoothly join the arc of R_6 to the arc of R_8 .

The left-hand side of S_3 shall be bounded by radius

$$R_9 = 4,5 \text{ mm} \pm 0,3 \text{ mm}$$

which is a dimension resulting from $L_{18} + L_{14} - R_6$ with an origin given by

$$L_{18} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{19} = 115,5 \text{ mm} \pm 0,3 \text{ mm}$$

The left-hand side of the boundary shall be closed by two straight lines. The first one shall smoothly join the arc of R_6 to the arc of R_9 . The second one shall run from the left hand tangent of R_7 to its intersection with R_9 . Along the left hand side of surface S_3 there shall be a zone to protect S_3 from being damaged by the shutter. In order to keep this zone at a minimum practical width

$$R_{10} = 4,1 \text{ mm max.}$$

This radius originates from the same point as R_9 .

10.10 Insertion slots and detent features (see figure 5)

The case shall have two symmetrical insertion slots with embedded detent features. The slots shall have a length of

$$L_{20} = 26,0 \text{ mm} \pm 0,3 \text{ mm}$$

a width of

$$L_{21} = 6,0 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

and a depth of

$$L_{22} = 3,0 \text{ mm} \pm 0,1 \text{ mm}$$

located

$$L_{23} = 2,5 \text{ mm} \pm 0,2 \text{ mm}$$

from reference plane P.

The slots shall have a lead-in chamfer given by

$$L_{24} = 0,5 \text{ mm max.}$$

$$L_{25} = 5,0 \text{ mm max.}$$

The detent notch shall be a semi-circle of radius

$$R_{11} = 3,0 \text{ mm} \pm 0,2 \text{ mm}$$

with the origin given by

$$L_{26} = 13,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{27} = 2,0 \text{ mm} \pm 0,1 \text{ mm}$$

10.11 Gripper slots (see figure 6)

The case shall have two symmetrical gripper slots with a depth of

$$L_{28} = 5,0 \text{ mm} \pm 0,3 \text{ mm}$$

from the edge of the case and a width of

$$L_{29} = 6,0 \text{ mm} \pm 0,3 \text{ mm}$$

The upper edge of a slot shall be

$$L_{30} = 12,0 \text{ mm} \pm 0,3 \text{ mm}$$

above the bottom of the case.

10.12 Write-inhibit holes (see figure 7)

Sides A and B shall each have a write-inhibit hole. The case shall include a device for opening and closing each hole. The hole at the left-hand side of Side A of the case, is the write-inhibit hole for Side A of the disk. The protected side of the disk shall be made clear by inscriptions on the case or by the fact that the device for Side A of the disk can only be operated from Side A of the case.

When writing and erasing on Side A of the disk are not allowed, the write-inhibit hole shall be open all through the case. It shall have a diameter

$$D_3 = 4,0 \text{ mm min.}$$

Its centre shall be specified by

$$L_{31} = 8,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{32} = 111,0 \text{ mm} \pm 0,3 \text{ mm}$$

on Side A of the case.

When writing and erasing are allowed on Side A of the disk, the write-inhibit hole shall be closed on Side A of the case, at a depth of typically L_{10} , i.e. the wall thickness of the case. In this state, the opposite side of the same hole, at Side B of the case, shall be closed and not recessed from the reference plane P of Side B of the case by more than

$$L_{33} = 0,5 \text{ mm}$$

The opposite side of the write-inhibit hole for protecting Side B of the disk shall have a diameter D_3 . Its centre shall be specified by L_{31} and

$$L_{34} = 11,0 \text{ mm} \pm 0,2 \text{ mm}$$

on Side A of the case.

10.13 Media sensor holes (see figure 8)

There shall be two sets of four media sensor holes. The set of holes at the lower left hand corner of Side A of the case pertains to Side A of the disk. The holes shall extend through the case, and have a diameter of

$$D_4 = 4,0 \text{ mm} \begin{array}{l} + 0,3 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

the positions of their centres shall be specified by L_{32} , L_{34} and

$$L_{35} = 19,5 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{36} = 17,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{37} = 23,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{38} = 29,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{39} = 93,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{40} = 99,0 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{41} = 105,0 \text{ mm} \pm 0,3 \text{ mm}$$

A hole is deemed to be open when there is no obstruction in this hole over a diameter D_4 all through the case.

A hole for Side A of the disk is deemed to be closed, when the hole is closed on both Side A and Side B of the case. The closure shall be recessed from reference plane P by

$$L_{42} = 0,1 \text{ mm max.}$$

The holes are numbered consecutively from 1 to 4. Hole No. 1 is the hole closest to the left hand edge of the case. The optical disk cartridge according to this International Standard uses only

hole No. 2. The other three holes shall be in the closed state. The function of hole No. 2 is to indicate whether the cartridge as loaded in the drive can be operated. When the hole is closed the cartridge is operable, when it is open the cartridge is not operable.

10.14 Head and motor window (see figure 10)

The case shall have a window on each side to enable the optical head and the motor to access the disk. The dimensions are referenced to a centreline, located at a distance of

$$L_{46} = 61,0 \text{ mm} \pm 0,2 \text{ mm}$$

to the left of reference axis Y.

The width of the head access shall be

$$L_{47} = 20,00 \text{ mm min.}$$

$$L_{48} = 20,00 \text{ mm min.}$$

and its height shall extend from

$$L_{49} = 118,2 \text{ mm min. to}$$

$$L_{50} = 57,0 \text{ mm max.}$$

The four inside corners shall be rounded with a radius of

$$R_{12} = 3,0 \text{ mm max.}$$

The motor access has a diameter of

$$D_5 = 35,0 \text{ mm min.}$$

and its centre shall be defined by L_{46} and

$$L_{51} = 43,0 \text{ mm} \pm 0,2 \text{ mm}$$

10.15 Shutter (see figure 11)

The case shall have a spring-loaded, unidirectional shutter with an optional latch, designed to completely cover the head and motor windows when closed. A shutter movement of 41,5 mm minimum shall be sufficient to ensure that the head and motor window is opened to the minimum size specified in 10.14. The shutter shall be free to slide in a recessed area of the case in such a way as to ensure that the overall thickness shall not exceed L_8 . The spring shall be sufficiently strong to close a free-sliding shutter, irrespective of the orientation of the cartridge.

The shutter opening force shall be 3 N max.

The right-hand side of the top of the shutter shall have a lead-in ramp with an angle

$$A_2 = 25^\circ \text{ max.}$$

The distance from the reference planes P to the nearest side of the ramp shall be

$$L_{52} = 3,0 \text{ mm max.}$$

10.16 Slot for shutter opener (see figure 11)

The shutter shall have only one slot in which the shutter opener of the drive can engage to open the shutter. The slot shall be dimensioned as follows:

When the shutter is closed, the vertical edge used to push the shutter open shall be located at a distance of

$$L_{53} = 34,5 \text{ mm} \pm 0,5 \text{ mm}$$

from reference axis Y on Side B of the case.

The length of the slot shall be

$$L_{54} = 4,5 \text{ mm} \pm 0,1 \text{ mm}$$

and the angle of the lead-out ramp shall be

$$A_3 = 52,5^\circ \pm 7,5^\circ.$$

The depth of the slot shall be

$$L_{55} = 3,5 \text{ mm} \pm 0,1 \text{ mm}$$

The width of the slot from the reference plane P of Side B of the case shall be

$$L_{56} = 6,0 \text{ mm} \begin{array}{l} + 0,5 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

If a shutter latch is employed, the distance between the latch and reference plane P of Side B of the case shall be

$$L_{57} = 3,0 \text{ mm max.}$$

10.17 Shutter sensor notch (see figure 9)

The shutter sensor notch is used to ensure that the shutter is fully open after insertion of the optical disk cartridge into the drive. Therefore, the notch shall be exposed only when the shutter is fully open.

The dimensions shall be

$$\begin{array}{l} L_{43} = 3,5 \text{ mm} \pm 0,2 \text{ mm} \\ L_{44} = 71,0 \text{ mm} \pm 0,3 \text{ mm and} \\ \quad + 0,0 \text{ mm} \\ L_{45} = 9,0 \text{ mm} \\ \quad - 2,0 \text{ mm} \end{array}$$

The notch shall have a lead-out ramp with an angle

$$A_1 = 45^\circ \pm 2^\circ$$

10.18 User label areas (see figure 13)

The case shall have the following minimum areas for user labels:

- on Side A and Side B: 35,0 mm x 65,0 mm
- on the bottom side: 6,0 mm x 98,0 mm

These areas shall be recessed by 0,2 mm min. Their positions are specified by the following dimensions and relations between dimensions (see figure 13).

$$\begin{array}{ll} L_{61} & = 4,5 \text{ mm min.} \\ L_{62} - L_{61} & = 65,0 \text{ mm min.} \\ L_{64} - L_{63} & = 35,0 \text{ mm min.} \\ L_{65} & = 4,5 \text{ mm min.} \\ L_{66} - L_{65} & = 65,0 \text{ mm min.} \\ L_{67} + L_{68} & = 35,0 \text{ mm min.} \\ L_8 - L_{71} - L_{72} & = 6,0 \text{ mm min.} \\ L_4 - L_{69} - L_{70} & = 98,0 \text{ mm min.} \end{array}$$

11 Dimensional and physical characteristics of the disk

11.1 Dimensions of the disk

11.1.1 Outer diameter

The outer diameter of the disk shall be 130,0 mm nominal. The tolerance is determined by the movement of the disk inside the case allowed by 13.5 and 13.6.

11.1.2 Thickness

The total thickness of the disk outside the hub area shall be 3,20 mm max.

11.1.3 Clamping zone (see figure 1)

The outer diameter of the zone shall be

$$D_6 = 35,0 \text{ mm min.}$$

The inner diameter of the zone shall be

$$D_7 = 27,0 \text{ mm max.}$$

11.1.4 Clearance zone

Within the zone defined by the outer diameter of the clamping zone (D_6) and the inner diameter of the Reflective Zone (see 16.2) there shall be no projection from the disk reference plane in the direction of the optical system of more than 0,2 mm.

11.2 Mass

The mass of the disk shall not exceed 120 g.

11.3 Moment of inertia

The moment of inertia of the disk shall not exceed 0,22 g.m².

11.4 Imbalance

The imbalance of the disk shall not exceed 0,01 g.m.

11.5 Axial deflection

The deviation of any point of the recording layer from its nominal position, in a direction normal to the disk reference plane, shall not exceed $\pm 0,30$ mm for rotational frequencies of the disk up to 30 Hz. The deviation shall be measured by the optical system defined in 15.1.1 and 15.1.2.

The nominal position of the recording layer with respect to the disk reference plane is determined by the nominal thickness of the substrate and its index of refraction.

11.6 Axial acceleration

The acceleration of the recording layer along any fixed line normal to the disk reference plane shall not exceed 20 m/s² in a bandwidth from 30 Hz to 1,5 kHz for a rotational frequency of the disk of 30,0 Hz $\pm$ 0,3 Hz. The acceleration shall be measured by the optical system defined in 15.1.1 and 15.1.2.

11.7 Dynamic radial runout

The difference between the maximum and the minimum distance of any track from the axis of rotation, measured along a fixed radial line over one revolution of the disk, shall not exceed 50 μ m, as measured by the optical system, for rotational frequencies of the disk up to 30 Hz.

11.8 Radial acceleration

The acceleration of any track along a fixed radial line shall not exceed 6 m/s^2 in a bandwidth from 30 Hz to 1,5 kHz, as measured by the optical system, at a rotational frequency of the disk of $30,0 \text{ Hz} \pm 0,3 \text{ Hz}$.

11.9 Tilt

The tilt angle, defined as the angle which the normal to the entrance surface, averaged over a circular area of 1 mm diameter, makes with the normal to the disk reference plane, shall not exceed 5 mrad in the operating environment.

12 Drop test

The optical disk cartridge shall withstand dropping on each surface and on each corner from a height of 760 mm on to a concrete floor covered with a vinyl layer 2 mm thick. The cartridge shall withstand all such impacts without any functional failure.

13 Interface between disk and drive**13.1 Clamping technique**

Radial positioning of the optical disk shall be provided by the centring of the axle of the spindle in the centre hole of the hub.

The turntable of the drive spindle shall support the disk in the clamping zone, determining the axial position of the disk in the case.

A clamping force shall be provided by the attraction between magnets in the spindle and a magnetizable ring in the hub.

13.2 Dimensions of the hub (see figure 1)**13.2.1 Outer diameter of the hub**

This diameter shall be

$$D_8 = 25,0 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

13.2.2 Height of the hub

This height shall be

$$h_1 = 2,2 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array}$$

13.2.3 Diameter of the centre hole

The diameter of the centre hole shall be

$$D_9 = 4,004 \text{ mm} \begin{array}{l} + 0,012 \text{ mm} \\ - 0,000 \text{ mm} \end{array}$$

13.2.4 Height of the top of the centre hole at diameter D_9

The height of the top of the centre hole at diameter D_9 , measured above the disk reference plane, shall be

$$h_2 = 2,0 \text{ mm min.}$$

13.2.5 Centring length at diameter D_9

This length shall be

$$h_3 = 0,5 \text{ mm min.}$$

The hole shall have a diameter larger than, or equal to, D_9 between the centring length and the disk reference plane. The hole shall extend through the substrate.

13.2.6 Chamfer at diameter D_9

The height of the outer chamfer of the centre hole of the hub shall be

$$h_4 = 0,2 \text{ mm max.}$$

The angle of the chamfer shall be 45° , or a corresponding full radius shall be used.

13.2.7 Chamfer at diameter D_8

The height of the chamfer at the rim of the hub shall be

$$h_5 = 0,2 \text{ mm} \begin{array}{l} + 0,2 \text{ mm} \\ - 0,0 \text{ mm} \end{array}$$

The angle of the chamfer shall be 45° , or a corresponding full radius shall be used.

13.2.8 Outer diameter of the magnetizable ring

This diameter shall be

$$D_{10} = 19,0 \text{ mm min.}$$

13.2.9 Inner diameter of the magnetizable ring

This diameter shall be

$$D_{11} = 8,0 \text{ mm max.}$$

13.2.10 Thickness of the magnetizable material

This thickness shall be

$$h_6 = 0,5 \text{ mm min.}$$

13.2.11 Position of the top of the magnetizable ring relative to the disk reference plane

This position shall be

$$h_7 = 2,2 \text{ mm} \begin{array}{l} + 0,0 \text{ mm} \\ - 0,1 \text{ mm} \end{array}$$

13.3 Magnetizable material

The magnetizable material shall be ferritic stainless steel (ISO 683-13, Type 8) or any suitable material with similar magnetic characteristics.

13.4 Clamping force

The clamping force exerted by the spindle shall be less than 14 N.

13.5 Capture cylinder for the hub (see figure 12)

The capture cylinder is defined as the volume in which the spindle can expect the centre of the hole of the hub to be at the maximum height of the hub, just prior to capture. The size of the cylinder limits the allowable play of the disk inside its cavity in the case. This cylinder is referred to perfectly located and perfectly sized alignment and location pins in the drive, and includes tolerances of dimensions of the case and the disk between the two pins mentioned and the centre

of the hub. The bottom of the cylinder is parallel to the reference plane P, and shall be located at a distance of

$$L_{58} = 0,5 \text{ mm min.}$$

above the reference plane P of Side B of the case when Side A of the disk is to be used. The top of the cylinder shall be located at a distance of

$$L_{59} = 4,3 \text{ mm max.}$$

above the same reference plane. The diameter of the cylinder shall be

$$D_{12} = 3,0 \text{ mm max.}$$

Its centre shall be defined by the nominal values of L_{46} and L_{51} .

13.6 Disk position in the operating condition (see figure 12)

When the disk is in the operating condition within the drive, the position of the active recording layer shall be

$$L_{60} = 5,35 \text{ mm} \pm 0,15 \text{ mm}$$

above reference plane P of that side of the case that faces the optical system. Moreover, the torque to be exerted on the disk in order to maintain a rotational frequency of 30 Hz shall not exceed 0,01 N.m, when the axis of rotation is within a circle with a diameter of

$$D_{13} = 0,2 \text{ mm max.}$$

and a centre given by the nominal values of L_{46} and L_{51} .

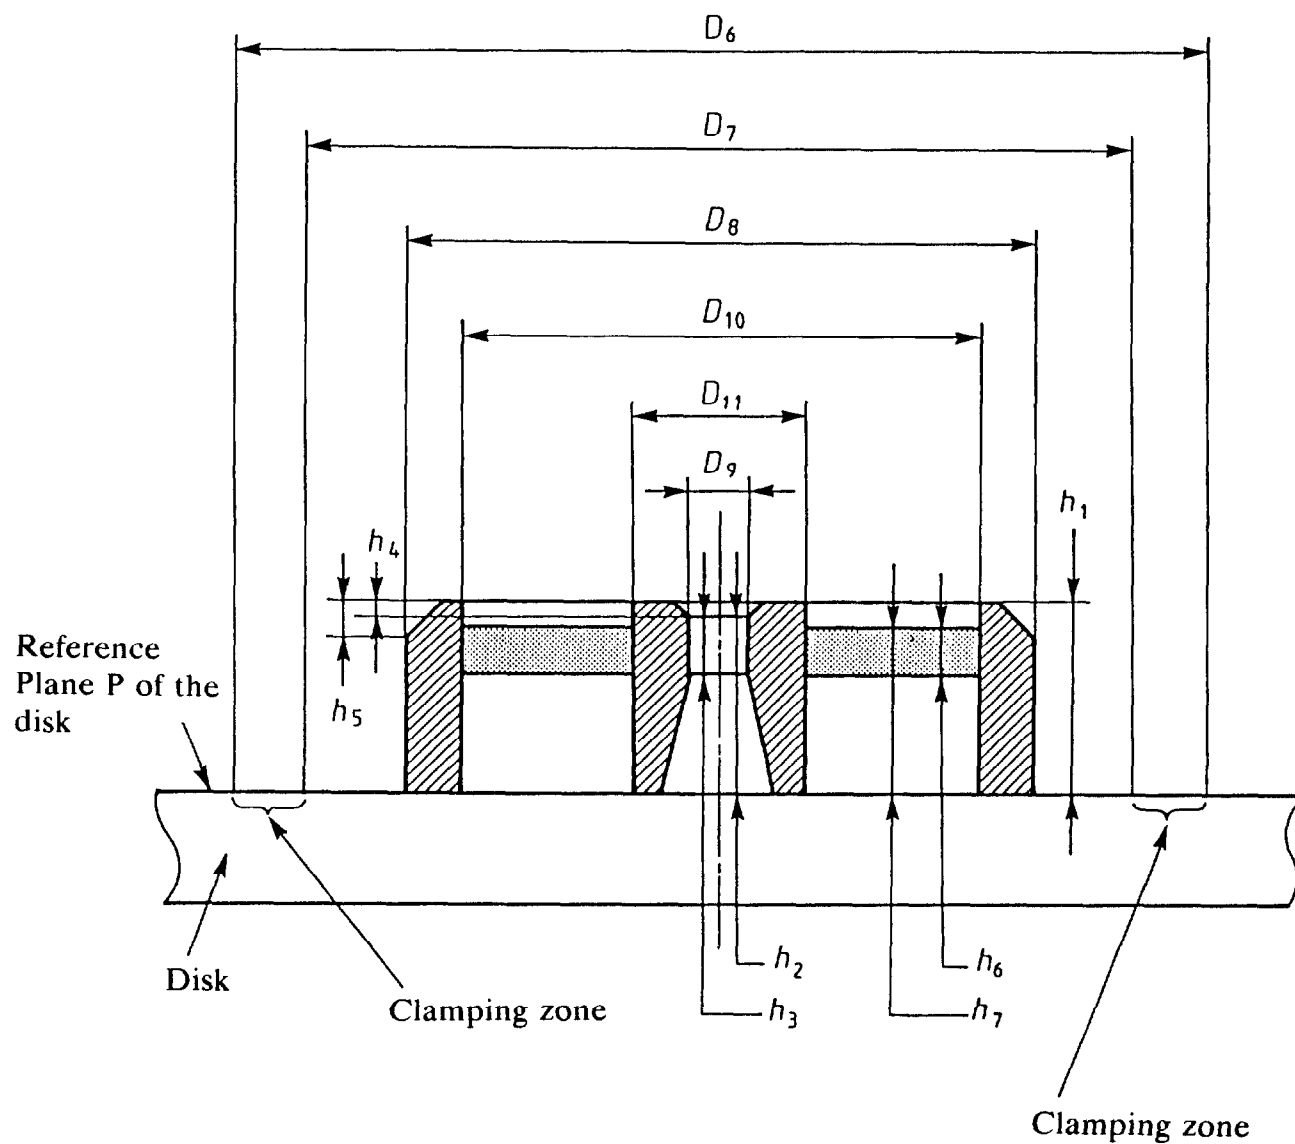


Figure 1 - Hub dimensions

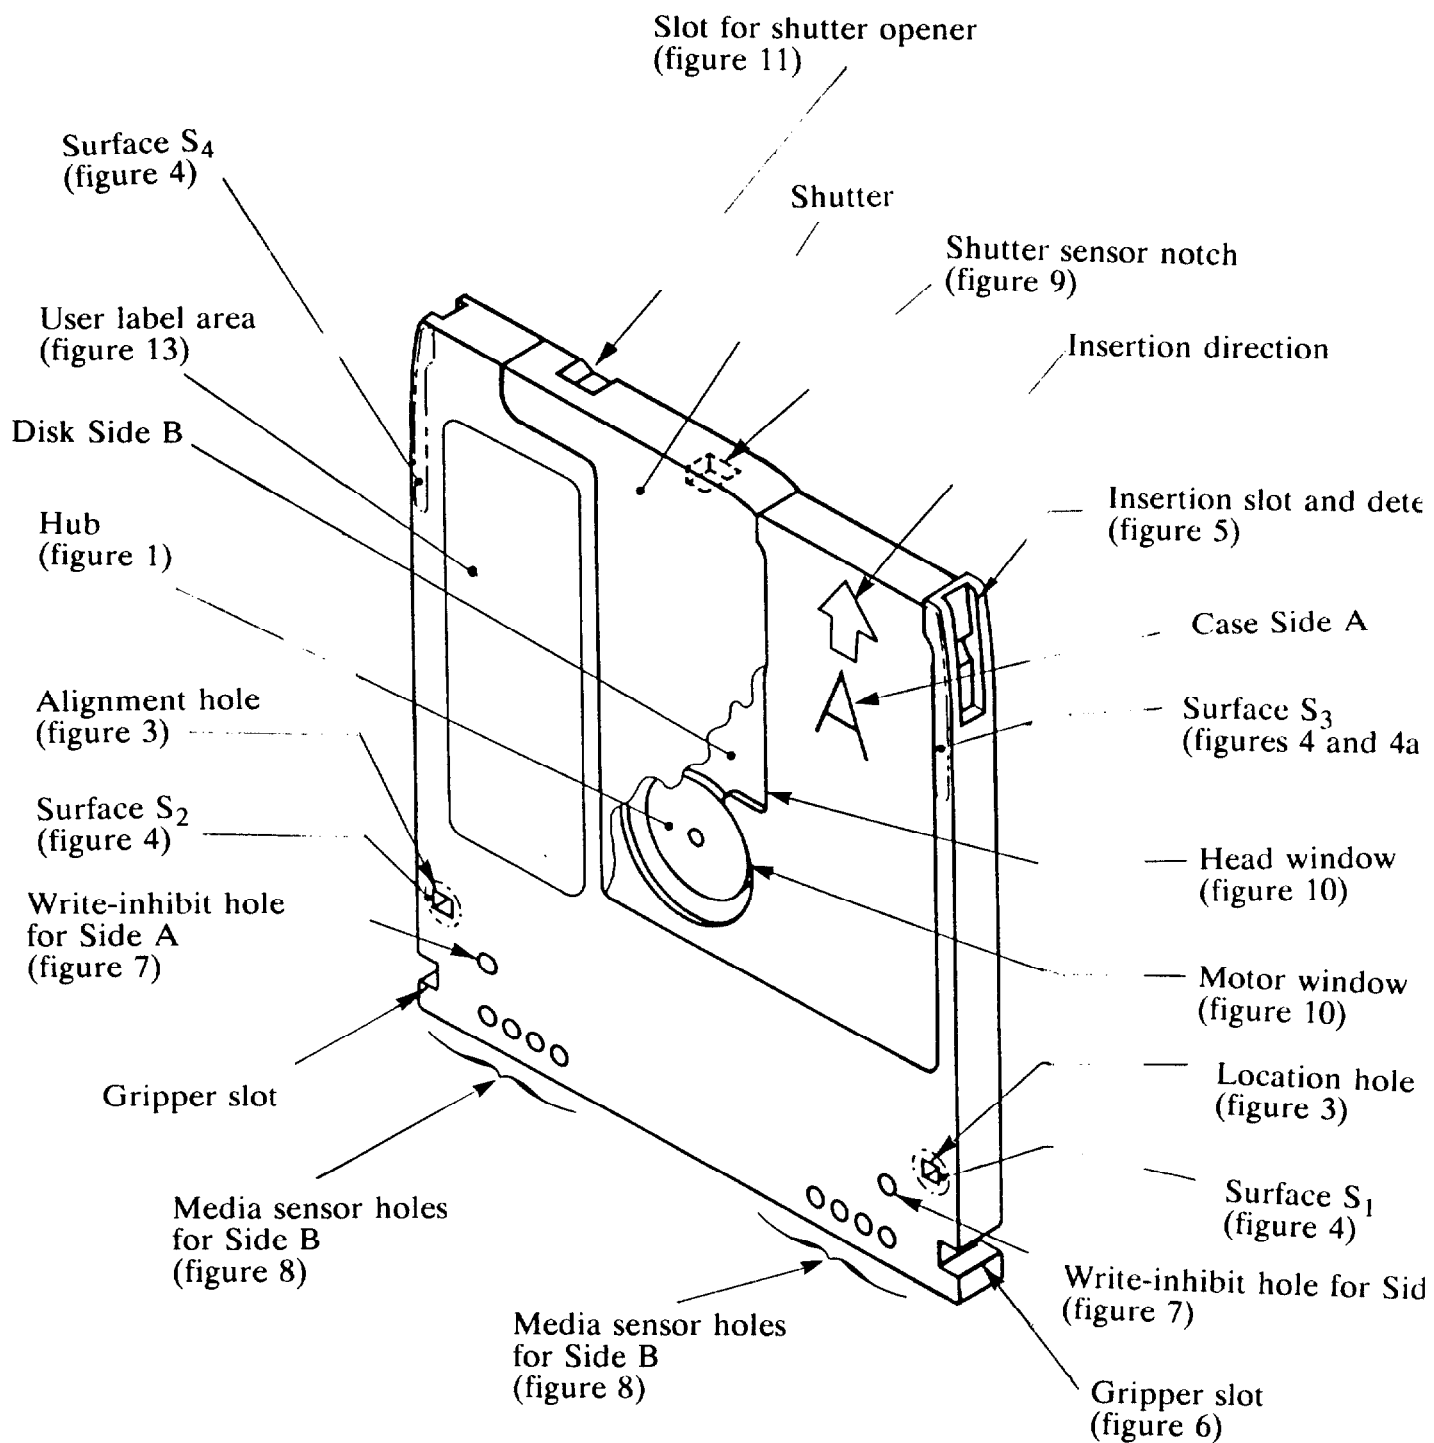


Figure 2 - Perspective view of the case

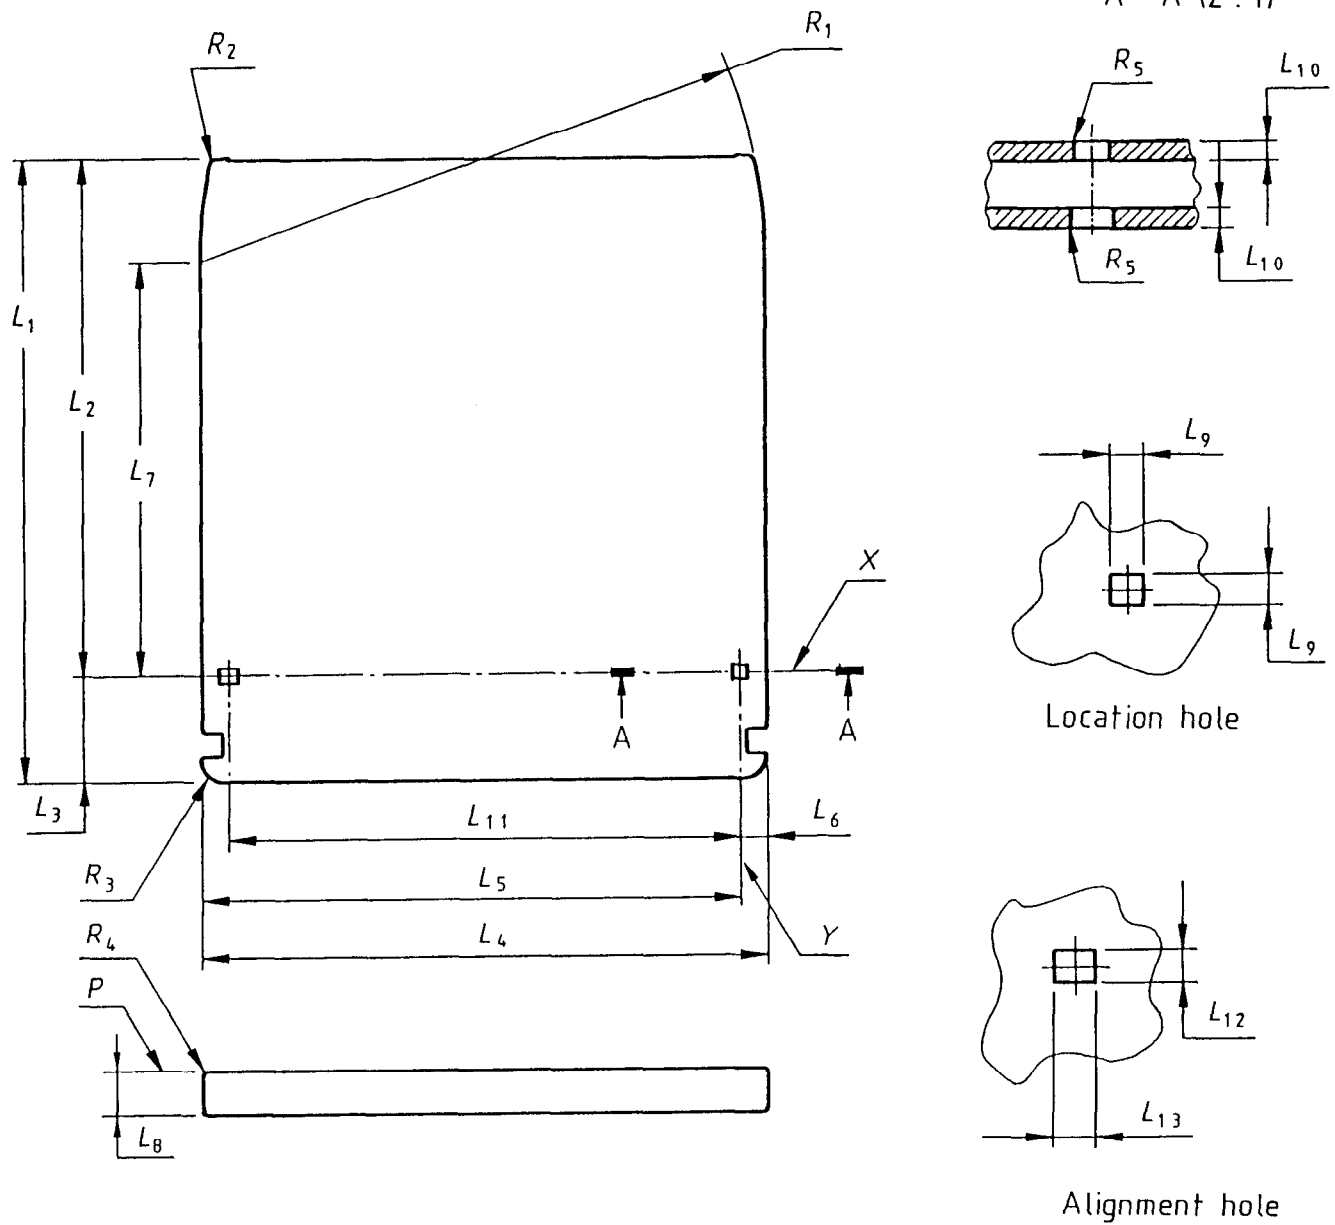


Figure 3 - Overall dimensions and reference axes

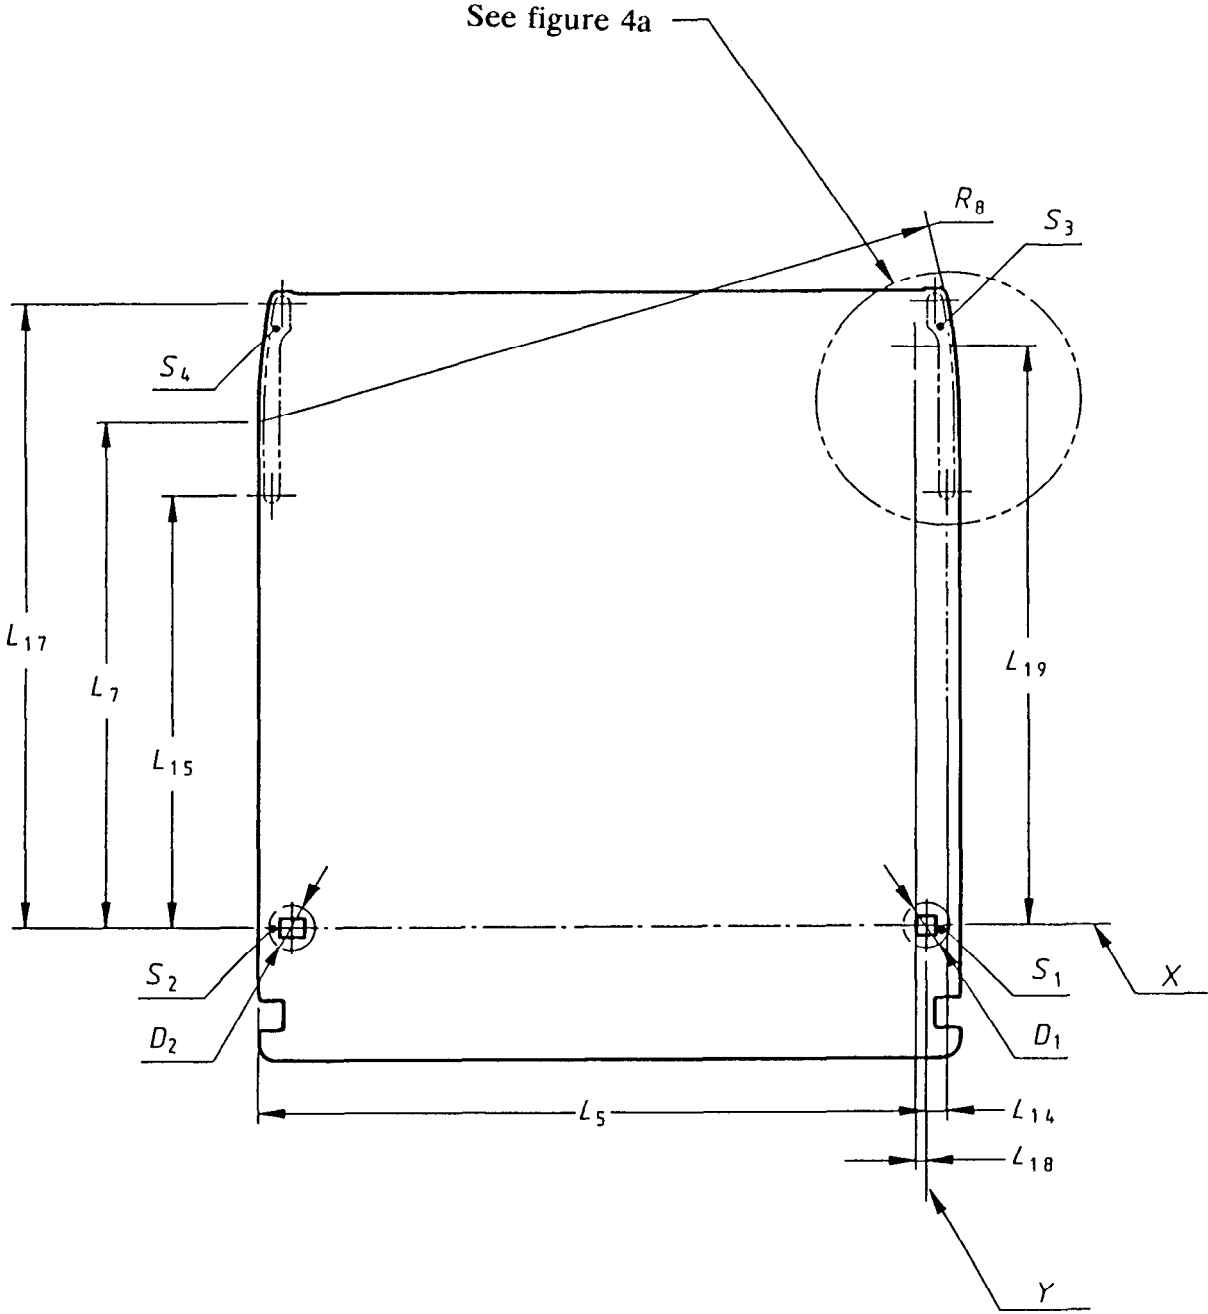


Figure 4 - Surfaces S1, S2, S3 and S4 of the reference plane P

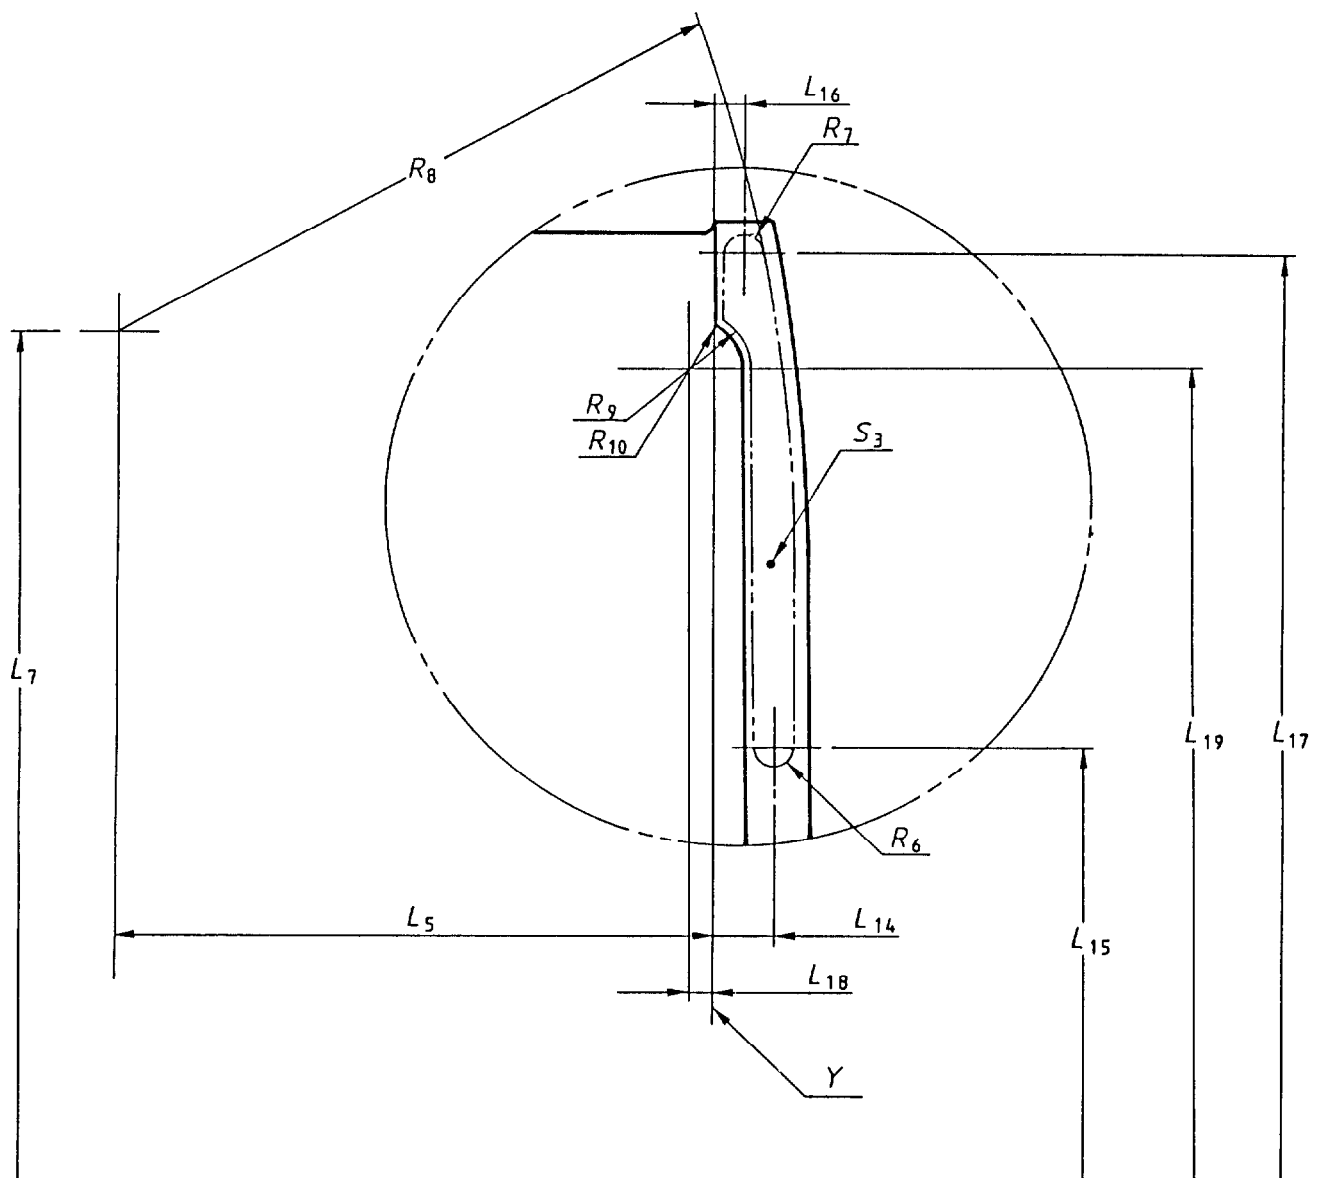


Figure 4a - Detail of surface S3

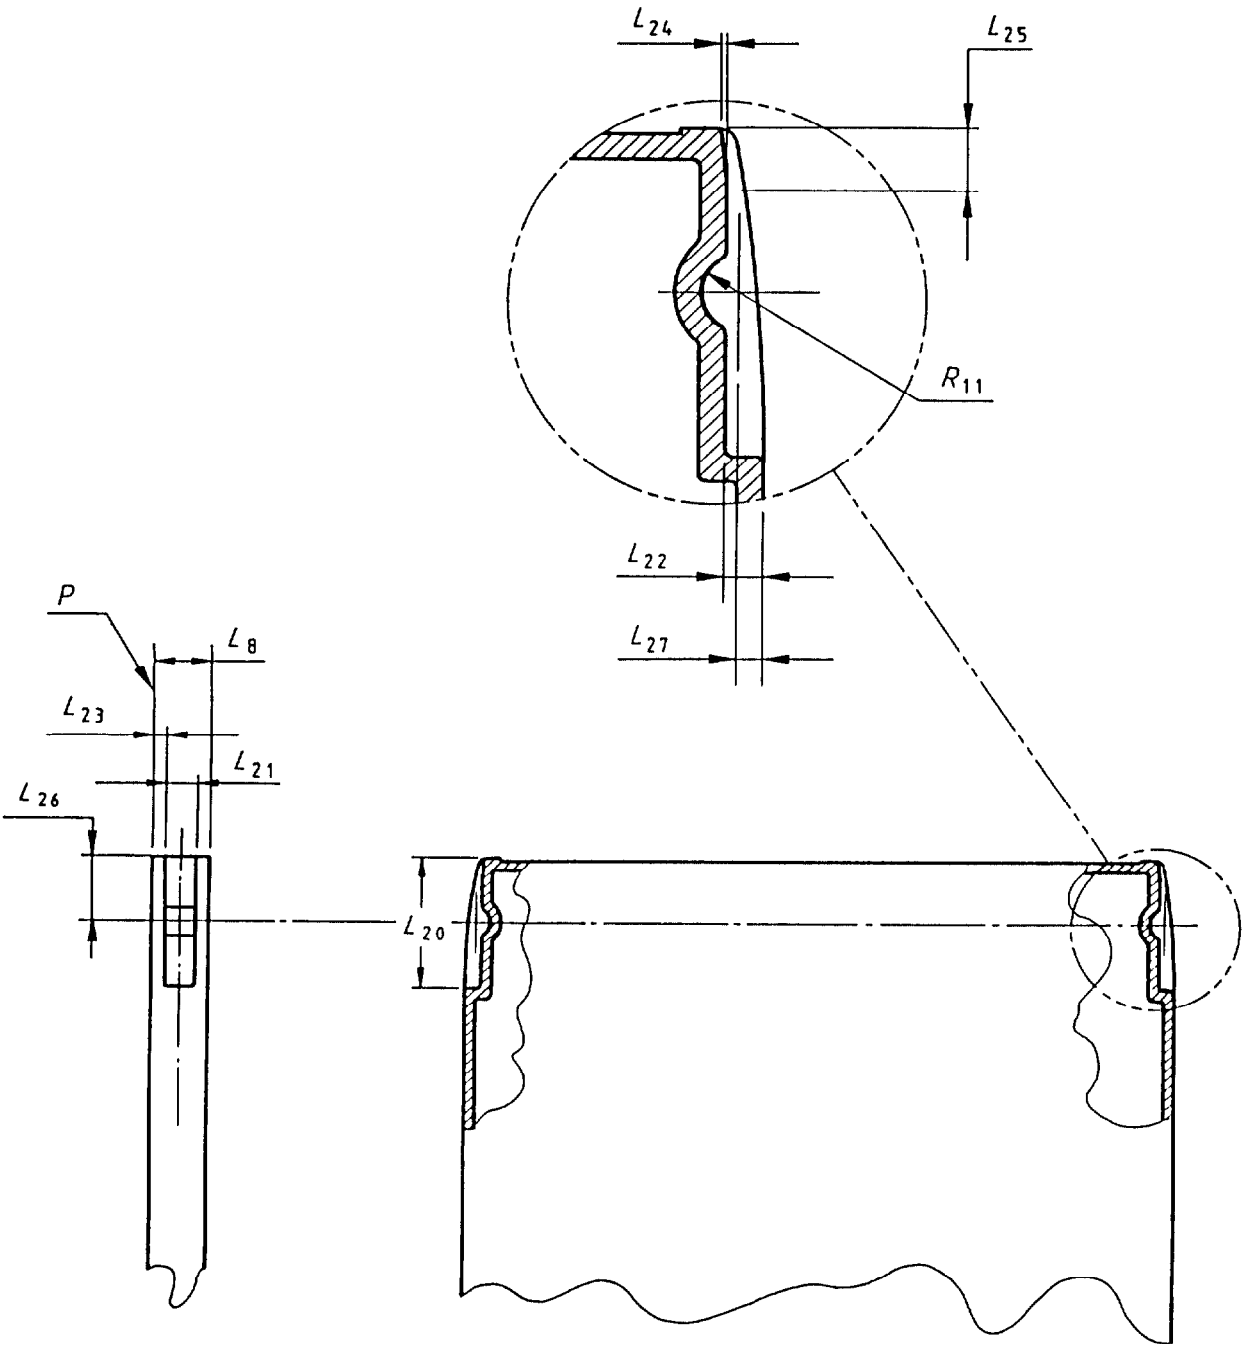


Figure 5 - Insertion slot and detent

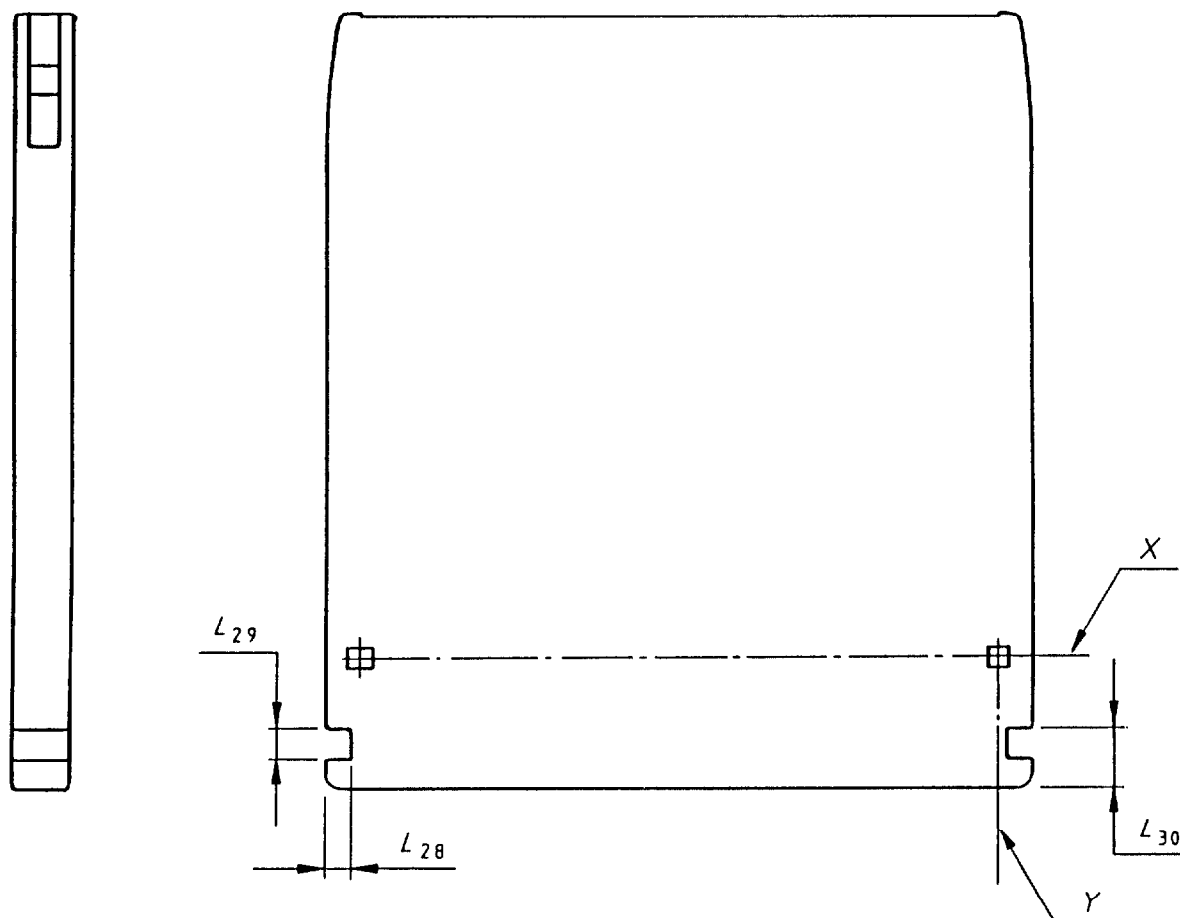


Figure 6 - Gripper slots

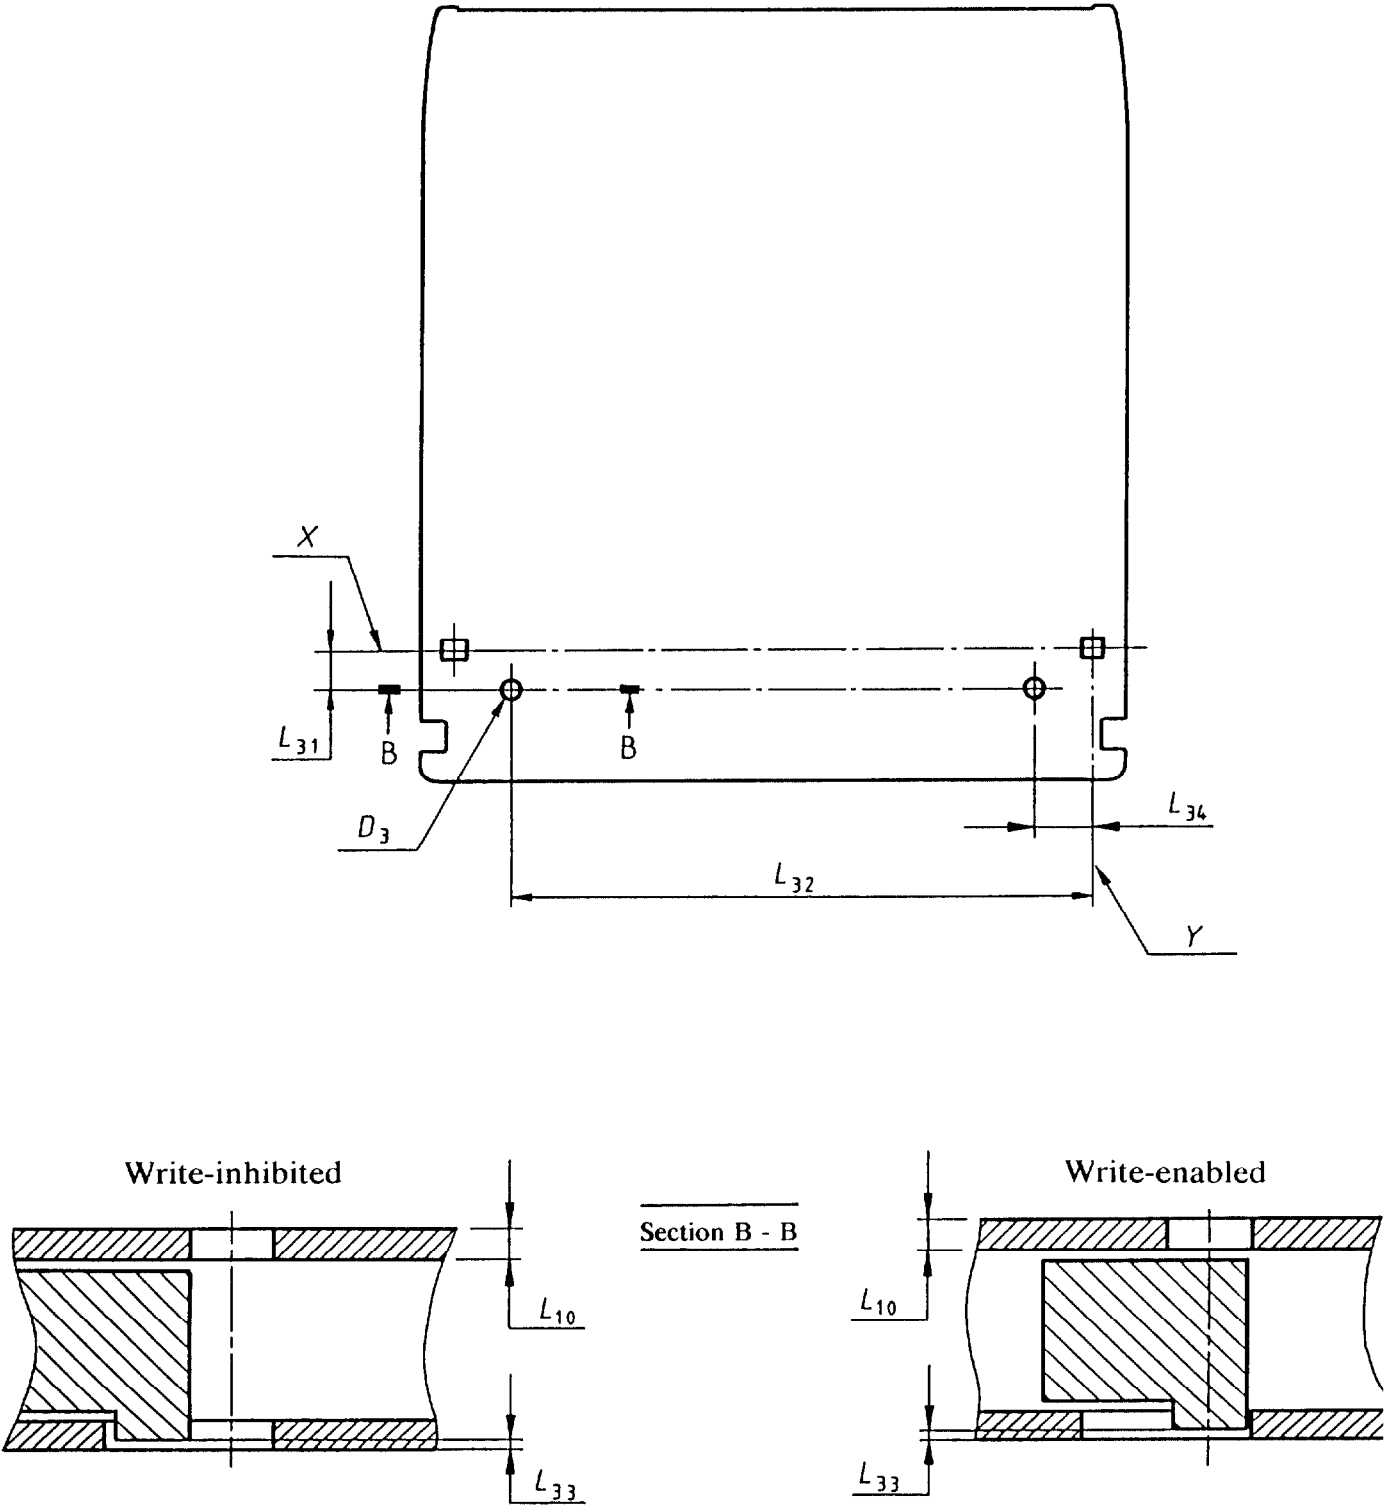


Figure 7 - Write-inhibit holes