

INTERNATIONAL STANDARD

ISO/IEC
11559

First edition
1993-08-15

Information technology — Data interchange on 12,7 mm wide 18-track magnetic tape cartridges — Extended format

*Technologies de l'information — Échange de données sur cartouche de
bande magnétique de 12,7 mm de large à 18 pistes — Format étendu*



Reference number
ISO/IEC 11559:1993(E)



Documents

Document Sharing Hub

Contents	Page
Section 1 - General	1
1 Scope	1
2 Conformance	1
2.1 Magnetic tape cartridge	1
2.2 Generating system	1
2.3 Receiving system	1
3 Normative references	2
4 Definitions	2
4.1 algorithm	2
4.2 Average Signal Amplitude	2
4.3 back surface	2
4.4 Beginning of Tape (BOT)	2
4.5 byte	2
4.6 cartridge	2
4.7 Cyclic Redundancy Check Character	2
4.8 Data Block	2
4.9 Data Records	2
4.9.1 Processed Data Record (PDR)	2
4.9.2 Host Data Record	2
4.9.3 Logical Data Record (LDR)	3
4.9.4 User Data Record (UDR)	3
4.10 Error Correcting Code	3
4.11 flux transition position	3
4.12 flux transition spacing	3
4.13 magnetic tape	3
4.14 Master Standard Reference Tape	3
4.15 Packet	3
4.16 Packet Identifier	3
4.17 Packet Trailer	3

© ISO/IEC 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland
Printed in Switzerland

4.18	pad byte	3
4.19	physical recording density	3
4.20	Postamble	3
4.21	Preamble	3
4.22	Processed Data	3
4.23	processing	3
4.24	Reference Field	3
4.25	Secondary Standard Reference Tape	3
4.26	Standard Reference Amplitude (SRA)	4
4.27	Standard Reference Current	4
4.28	Test Recording Current	4
4.29	track	4
4.30	Typical Field	4
4.31	transformation	4
5	Conventions and notations	4
5.1	Representation of numbers	4
5.2	Names	4
5.3	Acronyms	4
6	Environment and safety	5
6.1	Cartridge/Tape testing environment	5
6.2	Cartridge operating environment	5
6.3	Cartridge storage environment	5
6.4	Safety requirements	5
6.4.1	Safeness	5
6.4.2	Flammability	5
6.5	Transportation	5
Section 2 - Characteristics of the tape		6
7	Characteristics of the tape	6
7.1	Material	6
7.2	Tape length	6
7.3	Tape width	6
7.4	Tape discontinuity	6
7.5	Total thickness of tape	6
7.6	Base material thickness	6
7.7	Longitudinal curvature	6
7.8	Out-of-plane distortions	6
7.9	Cupping	6
7.10	Dynamic frictional characteristics	7
7.10.1	Frictional drag between the recording surface and the tape back surface	7
7.10.2	Frictional drag between the tape recording surface and ferrite after environmental cycling	7
7.11	Coating adhesion	7
7.12	Flexural rigidity	8
7.13	Electrical resistance of coated surfaces	8
7.14	Tape durability	9
7.15	Inhibitor tape	9

7.16	Tape abrasivity	9
7.17	Pre-recording condition	10
7.18	Magnetic recording characteristics	10
7.18.1	Typical Field	10
7.18.2	Signal amplitude	10
7.18.3	Resolution	10
7.18.4	Overwrite	10
7.18.5	Narrow-band signal-to-noise ratio (NB-SNR)	11
7.19	Tape quality	11
7.19.1	Missing pulses	12
7.19.2	Missing pulse zones	12
7.19.3	Coincident missing pulse zones	12
Section 3 - Cartridge		12
8	Dimensional and mechanical characteristics of the cartridge	12
8.1	Overall dimensions	13
8.2	Write-inhibit mechanism	13
8.3	Label area of the rear side	14
8.4	Label area of the top side	14
8.5	Case opening	14
8.6	Locating notches	15
8.7	Locating areas	15
8.8	Inside configuration of the case around the case opening	15
8.9	Other external dimensions of the case	15
8.10	Central window	16
8.11	Stacking ribs	16
8.12	Flexibility of the case	16
8.12.1	Requirements	16
8.12.2	Procedure	16
8.13	Tape reel	17
8.13.1	Locking mechanism	17
8.13.2	Axis of rotation of the reel	17
8.13.3	Metallic insert	17
8.13.4	Toothed rim	17
8.13.5	Hub of the reel	17
8.13.6	Relative positions	18
8.13.7	Characteristics of the toothed rim	19
8.14	Leader block	19
8.15	Attachment of the tape to the header block	20
8.16	Latching mechanism	20
8.17	Tape wind	20
8.18	Wind tension	20
8.19	Circumference of the tape reel	21
8.20	Moment of inertia	21
Section 4 - Recording method and formats		28
9	Method of recording	28

9.1	Physical recording density	28
9.2	Bit cell length	28
9.3	Average bit cell length	28
9.4	Long-term average bit cell length	28
9.5	Short-term average bit cell length (STA)	28
9.6	Rate of change	28
9.7	Bit shift	28
9.8	Total character skew	29
9.9	Read signal amplitude	29
9.10	Coincident missing pulse zones	29
10	Track format	29
10.1	Number of tracks	29
10.2	Reference edge	29
10.3	Track positions	29
10.4	Track width	29
10.5	Azimuth	30
11	Packet format	30
11.1	Packet elements	30
11.2	Packet ID	30
11.3	UDR	31
11.4	Packet Trailer	31
11.4.1	Packet Trailer when data has been processed	31
11.4.2	Packet Trailer when data has not been processed	31
12	Data Block format	32
12.1	Data Part	32
12.1.1	Packet Bytes	32
12.1.2	Count Field Bytes	32
12.1.3	Block-ID Bytes	32
12.2	Allocation of Data Bytes to frames	33
12.2.1	Prefix Frames	34
12.2.2	Data Frames	34
12.2.3	Residual Frame 1	35
12.2.4	Residual Frame 2	35
12.2.5	Suffix Frames	37
12.3	Error Correcting Code (ECC)	37
12.3.1	Diagonal Redundancy Check (DRC)	38
12.3.2	Vertical Redundancy Check (VRC)	38
12.3.3	ECC Format	38
12.3.4	Summary of ECC2)	39
12.4	Recording of 8-bit bytes on the tape	40
12.5	Recorded Data Block	40
12.5.1	Preamble	40
12.5.2	Beginning of Data Mark (BDM)	41

12.5.3	Resync Control Frame	41
12.5.4	End of Data Mark (EDM)	41
12.5.5	Postamble	41
12.6	Data Density	41
13	Tape format	41
13.1	Density Identification Burst	42
13.2	ID Separator Burst	42
13.3	Interblock Gaps	42
13.4	Erase Gaps	43
13.4.1	Normal Erase Gaps	43
13.4.2	Elongated Erase Gaps	43
13.5	Tape Marks	43
13.6	Relationship between Interblock Gaps, Erase Gaps and Tape Marks	44
13.6.1	Interblock Gap followed by a Tape Mark	44
13.6.2	Tape Mark followed by an Interblock Gap	44
13.6.3	Interblock Gap followed by an Erase Gap	44
13.6.4	Erase Gap followed by an Interblock Gap	44
13.6.5	Summary of the relationship between Interblock Gaps, Erase Gaps and Tape Marks	45
13.7	First and last recording on the tape	45
13.8	Summary of the tape format	46
13.9	Transform Change Records (TCRs)	47
Annexes		
A	Recommendations for transportation	49
B	Inhibitor tape	50
C	Tape abrasivity measurement procedure	51
D	Recommendations on tape durability	53
E	Pre-recording condition	54
F	Representation of 8-bit bytes by 9-bit patterns	55
G	Measurement of bit shift	58
H	Summary of data flow	60
J	Implementation of a CRC	61
K	Calculation of a Physical Position Indicator	62

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 11559 was prepared by European Computer Manufacturers Associations (as ECMA-152) and was adopted, under a special "fast-track procedure", by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Annexes C, E, F, G and K form an integral part of this International Standard. Annexes A, B, D, H and J are for information only.

Introduction

ISO/IEC 11559 incorporates all the specifications of ISO 9661, together with extensions and modifications which specify the additional features of an extended format that also allows higher capacities to be achieved. The specifications of the tape, cartridge, recorded signal, recording method and most of the recorded format are identical with those in ISO 9661.

It is not intended that this International Standard replaces ISO 9661. Existing drives and cartridges which conform to ISO 9661 will continue to do so and will not conform to all requirements of this International Standard . Drives conforming to this International Standard will be able to write on, and read from, cartridges conforming to ISO 9661.

Information technology — Data interchange on 12,7 mm wide 18-track magnetic tape cartridges — Extended format

Section 1 - General

1 Scope

This International Standard specifies the physical and magnetic characteristics of a 12,7 mm wide, 18-track magnetic tape cartridge, to enable interchangeability of such cartridges. It also specifies the quality of the recorded signals, the format and the recording method, thus allowing, together with ISO 1001, full data interchange by means of such magnetic tape cartridges.

The cartridge and recording method are identical with those described in ISO 9661. This International Standard specifies extensions to the transformation of data before it is formatted as in ISO 9661.

These extensions

- specify a method for increasing the utilization of the tape by combining smaller blocks of data into extended blocks;
- specify a method for identifying whether the recorded data has been processed and, if it has been processed, the algorithm used for processing;
- specify a method for including recorded data blocks conforming to this International Standard and recorded data blocks conforming to ISO 9661 on the same tape.

The permissible routes for the flow of data are shown in annex H.

2 Conformance

2.1 Magnetic tape cartridge

A magnetic tape cartridge shall be in conformance with this International Standard if

- the cartridge meets all the requirements of clauses 4 and 6 to 8;
- the recording on the tape meets the requirements of clauses 9 to 13;
- for each recorded packet the algorithm used for processing the data therein, if processed data has been recorded, has (have) been registered and the registered identification is included in Byte 13 of the Packet ID Block of this packet (see 11.2).
- Note 1 - If the algorithm has not been registered Byte 13 shall be set to (FF).

2.2 Generating system

A system generating a magnetic tape cartridge for interchange shall be entitled to claim conformance with this International Standard if all the recordings that it makes on a tape meet the mandatory requirements of this International Standard. A claim of conformance shall state whether or not one, or more, registered algorithms are implemented and, if so, the registered number(s) of all implemented algorithm(s).

2.3 Receiving system

A system receiving a magnetic tape cartridge for interchange shall be entitled to claim conformance with this International Standard if it is able to handle any recording made on the tape according to this International Standard. In particular it shall

- be able to recognize the occurrence of extended blocks and to identify and retrieve data from individual packets within the extended blocks;
- be able to recognize that the data has been processed, to identify the algorithm(s) used, and to indicate to the host if it cannot restore the data to its original form;

- be capable of restoring to its original form data which has been processed according to zero or more registered algorithms.

A claim of conformance shall state whether or not one, or more, registered algorithm(s) is (are) implemented and, if so, the registered number(s) of all implemented algorithms.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

- ISO 683-13:1986, *Heat-treatable steels, alloy steels and free-cutting steels - Part 13: Wrought stainless steels.*
- ISO 1001:1986, *Information processing - File structure and labelling of magnetic tapes for information interchange.*
- ISO 1302:1992, *Technical drawings - Method of indicating surface texture on drawings.*
- ISO 9661:1986, *Information processing - Data interchange on 12,7 mm (0.5 in) wide magnetic tape cartridges - 18-tracks, 1 491 data bytes per millimetre (37 871 data bytes per inch).*
- ISO/IEC 11576:1993, *Information technology - Procedure for the registration of algorithms for the lossless compression of data.*

4 Definitions

For the purposes of this International Standard, the following definitions apply.

- 4.1 algorithm:** A set of rules for transforming the logical representation of data.
- 4.2 Average Signal Amplitude:** The average peak-to-peak value of the signal output of the read head measured over a minimum length of track of 25,4 mm exclusive of missing pulses.
- 4.3 back surface:** The surface of the tape opposite the magnetic coating used to record data.
- 4.4 Beginning of Tape (BOT):** The point along the length of the magnetic tape indicated by the start of the Density Identification Burst.
- 4.5 byte:** An ordered set of eight bits acted upon as a unit.
- 4.6 cartridge:** A container holding a supply reel of magnetic tape with an attached leader block.
- 4.7 Cyclic Redundancy Check Character:** A character represented by two bytes, placed at the end of a byte string and used for error detection.
- 4.8 Data Block:** The data entity resulting from concatenating one or more Packets, and appending control information.
- 4.9 Data Records**
- 4.9.1 Processed Data Record (PDR):** The data entity resulting from the application of an algorithm to a Logical Data Record.
- 4.9.2 Host Data Record:** The data entity originally compiled by the host.

4.9.3 Logical Data Record (LDR): The data entity received by the system from the host. It may consist of one or several Host Data Record(s) depending upon action taken by the host to use extended blocks.

4.9.4 User Data Record (UDR): The data entity available to the Packet former.

When the data has been processed it shall be a PDR.

When the data has not been processed it shall be an LDR.

4.10 Error Correcting Code: A mathematical procedure yielding bits used for the detection and correction of errors.

4.11 flux transition position: That point which exhibits maximum free-space flux density normal to the surface of the tape.

4.12 flux transition spacing: The distance along a track between successive flux transitions.

4.13 magnetic tape: A tape which will accept and retain the magnetic signals intended for input, output and storage purposes on computers and associated equipment.

4.14 Master Standard Reference Tape: A tape selected as the standard for Reference Field, Signal Amplitude, Resolution and Overwrite.

Note 2 - A Master Standard Reference Tape has been established at the National Institute for Standards and Technology (NIST).

4.15 Packet: A UDR with a Packet Identifier and Packet Trailer added.

4.16 Packet Identifier: The group of 32 bytes added to the beginning of a UDR when forming a Packet.

4.17 Packet Trailer: The group of bytes of variable size appended to a UDR when forming a Packet.

4.18 pad byte: A byte having a bit pattern consisting of eight ZEROs.

4.19 physical recording density: The number of recorded flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpm).

4.20 Postamble: A repeated 9-bit pattern at the end of a Recorded Data Block providing electronic synchronization when reading in the reverse direction.

4.21 Preamble: A repeated 9-bit pattern at the beginning of a Recorded Data Block providing electronic synchronization when reading in the forward direction.

4.22 Processed Data: Data which has been processed by an algorithm.

4.23 processing: The use of an algorithm.

4.24 Reference Field: The Typical Field of the Master Standard Reference Tape.

4.25 Secondary Standard Reference Tape: A tape the performance of which is known and stated in relation to that of the Master Standard Reference Tape.

Note 3 - Secondary Standard Reference Tapes have been developed at the National Institute for Standards and Technology (NIST) and will be available from the NIST Office of Standard Reference Materials, Room 205, Building 202, National Institute of Standards and Technology, Gaithersburg, MA 20899, USA, under reference number SRM 3202, until January 2004.

It is intended that these be used for calibrating tertiary reference tapes for use in routine calibration.

- 4.26 Standard Reference Amplitude (SRA):** The Average Signal Amplitude from the Master Standard Reference Tape when it is recorded with the Test Recording Current on the NIST measurement system at 972 ftpmm. Traceability to the Standard Reference Amplitude is provided by the calibration factors supplied with each Secondary Standard Reference Tape.
- 4.27 Standard Reference Current:** The current that produces the Reference Field.
- 4.28 Test Recording Current:** The current that is 1,5 times the Standard Reference Current.
- 4.29 track:** A longitudinal area on the tape along which a series of magnetic signals may be recorded.
- 4.30 Typical Field:** In the plot of the Average Signal Amplitude against the Recording Field at the physical recording density of 972 ftpmm, the minimum field that causes an Average Signal Amplitude equal to 85% of the maximum Average Signal Amplitude.
- 4.31 transformation:** The manipulation of Host Data Records before formatting. It includes the operations of Processing, the formation of Packets and the concatenation of Packets.

5 Conventions and notations

5.1 Representation of numbers

The following conventions and notations apply in this International Standard, unless otherwise stated:

- In each field the bytes shall be arranged with Byte 1, the most significant, first. Within each byte the bits shall be arranged with Bit 1, the most significant, first and Bit 8, the least significant bit, last. This order applies to the data, and to the input and output of the error correcting codes and the cyclic redundancy codes.
- Letters and digits in parentheses represent numbers in hexadecimal notation.
- Numbers in binary notation and bit combinations are represented by strings of ZEROs and ONES.
- Numbers in binary notation and bit combinations are shown with the most significant bit to the left.
- The setting of bits is denoted by ZERO or ONE.

5.2 Names

The names of entities are given with a capital initial letter.

5.3 Acronyms

BDM	Beginning of Data Mark
BOT	Beginning of Tape
CRC	Cyclic Redundancy Check
DRC	Diagonal Redundancy Check
ECC	Error Correcting Code
EDM	End of Data Mark
ID	Identifier
LDR	Logical Data Record
NB-SNR	Narrow band signal-to-noise ratio
PDR	Processed Data Record
RBW	Resolution BandWidth
SRA	Standard Reference Amplitude
STA	Short Term Average
TCR	Transform Change Record

UDR	User Data Record
VBW	Video BandWidth
VRC	Vertical Redundancy Code

6 Environment and safety

Unless otherwise stated, the conditions specified below refer to the ambient conditions in the test or computer room and not to those within the tape equipment.

6.1 Cartridge/Tape testing environment

Unless otherwise stated, tests and measurements made on the tape cartridge to check the requirements of this International Standard shall be carried out under the following conditions:

temperature:	23 °C ± 2 °C
relative humidity:	40 % to 60 %
conditioning period before testing:	24 h

6.2 Cartridge operating environment

Cartridges used for data interchange shall be capable of operating under the following conditions:

temperature:	16 °C to 32 °C
relative humidity:	20 % to 80 %
wet bulb temperature:	25 °C max.

The average temperature of the air immediately surrounding the tape shall not exceed 40,5 °C.

Note 4 - Localized tape temperatures in excess of 49 °C may cause tape damage.

Conditioning before operating: If a cartridge has been exposed during storage and/or transportation to conditions outside the above values, it shall be conditioned for a period of at least 24 h.

6.3 Cartridge storage environment

Cartridges used for data interchange shall be stored under the following conditions.

temperature:	5 °C to 32 °C
relative humidity:	5 % to 80 %
wet bulb temperature:	26 °C max.

6.4 Safety requirements

6.4.1 Safeness

The cartridge and its components shall not constitute any safety or health hazard when used in its intended manner or in any foreseeable misuse in an information processing system.

6.4.2 Flammability

The cartridge and its components shall be made from materials which, if ignited from a match flame, do not continue to burn in a still carbon dioxide atmosphere.

6.5 Transportation

This International Standard does not specify parameters for the environment in which cartridges should be transported. Annex A gives some recommendations for transportation.

Section 2 - Characteristics of the tape

7 Characteristics of the tape

7.1 Material

The tape shall consist of a base material (oriented polyethylene terephthalate film or its equivalent) coated on one side with a strong yet flexible layer of ferromagnetic material dispersed in a suitable binder. The back surface of the tape may also be coated with a ferromagnetic or non-ferromagnetic material.

7.2 Tape length

The length of the tape shall not be less than 165 m.

7.3 Tape width

The width of the tape shall be $12,650 \text{ mm} \pm 0,025 \text{ mm}$. The width shall be measured across the tape from edge-to-edge when the tape is under a tension of less than 0,28 N.

7.4 Tape discontinuity

There shall be no discontinuities in the tape such as those produced by tape splicing or perforations.

7.5 Total thickness of tape

The total thickness of the tape at any point shall be between 0,025 9 mm and 0,033 7 mm.

7.6 Base material thickness

The thickness of the base material shall be 0,023 4 mm nominal.

7.7 Longitudinal curvature

The radius of curvature of the edge of the tape shall not be less than 33 m.

Procedure

Allow a 1 m length of tape to unroll and assume its natural curvature on a flat smooth surface. Measure the deviation from a 1 m chord. The deviation shall not be greater than 3,8 mm. This deviation corresponds to the minimum radius of curvature of 33 m if measured over an arc of circle.

7.8 Out-of-plane distortions

All visual evidence of out-of-plane distortion shall be removed when the tape is subjected to a uniform tension of 0,6 N. Out-of-plane distortions are local deformations which cause portions of the tape to deviate from the plane of the surface of the tape. Out-of-plane distortions are most readily observed when the tape is lying on a flat surface under no tension.

7.9 Cupping

The departure across the width of tape from a flat surface shall not exceed 0,3 mm.

Procedure:

Cut a $1,0 \text{ m} \pm 0,1 \text{ m}$ length of tape. Condition it for a minimum of 3 h in the test environment by hanging it so that the coated surface is freely exposed to the test environment. From the centre portion of the conditioned tape cut a test piece of length 25 mm. Stand the test piece on its end in a cylinder which is at least 25 mm high with an inside diameter of $13,0 \text{ mm} \pm 0,2 \text{ mm}$. With the cylinder standing on an optical comparator measure the cupping by aligning the edges of the test piece to the reticle and determining the distance from the aligned edges to the corresponding surface of the test piece at its centre.

7.10 Dynamic frictional characteristics

In the tests of 7.10.1 and 7.10.2 the specified forces of 1,0 N and 1,50 N, respectively, comprise both the force component of the dynamic friction and the force of 0,64 N applied to the sample of tape.

Note 5 - Particular attention should be given to keeping the surfaces clean.

7.10.1 Frictional drag between the recording surface and the tape back surface

The force required to move the recording surface in relation to the back surface shall not be less than 1,0 N.

Procedure:

- a) Wrap a test piece of tape around a 25,4 mm diameter circular mandrel with the back surface of the test piece facing outwards.
- b) Place a second test piece of tape, with the recording surface facing inwards, around the first test piece for a total wrap angle of 90°.
- c) Apply a force of 0,64 N to one end of the outer test piece of tape. Secure its other end to a force gauge which is mounted on a motorized linear slide.
- d) Drive the slide at a speed of 1 mm/s.

7.10.2 Frictional drag between the tape recording surface and ferrite after environmental cycling

The force required to move the tape at a point 1,34 m from the leader block of the cartridge shall not be greater than 1,50 N. The force required at a point 4,3 m from the junction of the tape with the cartridge hub shall not exceed the first force by more than a factor of 4.

Procedure:

- a) Wind tape on to a spool hub of diameter 50 mm to an outside diameter of 97 mm with a winding tension of $2,2 \text{ N} \pm 0,2 \text{ N}$.
- b) Repeat the following two steps five times:
 - 1) Store for 48 h at a temperature of 50 °C and a relative humidity of 10% to 20%.
 - 2) Condition in the testing environment for 2 h and rewind with a tension of $2,2 \text{ N} \pm 0,2 \text{ N}$.
- c) Condition the tape for 48 h at a temperature of 30,5 °C and a relative humidity of 85%. The tape shall remain in this environment for steps d) and e).
- d) Apply a force of 0,64 N to one end of a test piece of not more than 1 m, taken 1,34 m from the leader block. Pass the test piece over a ferrite rod of diameter 25,4 mm with the recording surface in contact with the rod for a total wrap angle of 90°.

The rod shall be made from the ferrite specified in annex C. It shall be polished to a roughness value R_a of 0,05 µm (roughness grade N2, ISO 1302). Pull the other end of the test piece horizontally at 1 mm/s.
- e) Repeat step d) for a similar test piece taken 4,3 m from the junction of the tape with the cartridge hub.

7.11 Coating adhesion

See figure 1.

The force required to peel any part of the coating from the tape base material shall not be less than 1,5 N.

Procedure:

- a) Take a test piece of the tape approximately 380 mm long and scribe a line through the recording coating across the width of the tape 125 mm from one end.

- b) Using a double-sided pressure sensitive tape, attach the full width of the test piece to a smooth metal plate, with the recording surface facing the plate, as shown in the figure below.
- c) Fold the test piece over 180°, attach the metal plate and the free end of the test piece to the jaws of a universal testing machine and set the speed of the jaw separation to 254 mm per min.
- d) Note the force at which any part of the coating first separates from the base material. If this is less than 1,5 N, the test has failed. If the test piece peels away from the double-sided pressure sensitive tape before the force exceeds 1,5 N, an alternative type of double-sided pressure sensitive tape shall be used.
- e) If the back surface of the tape is coated, repeat a) to d) for the back coating.

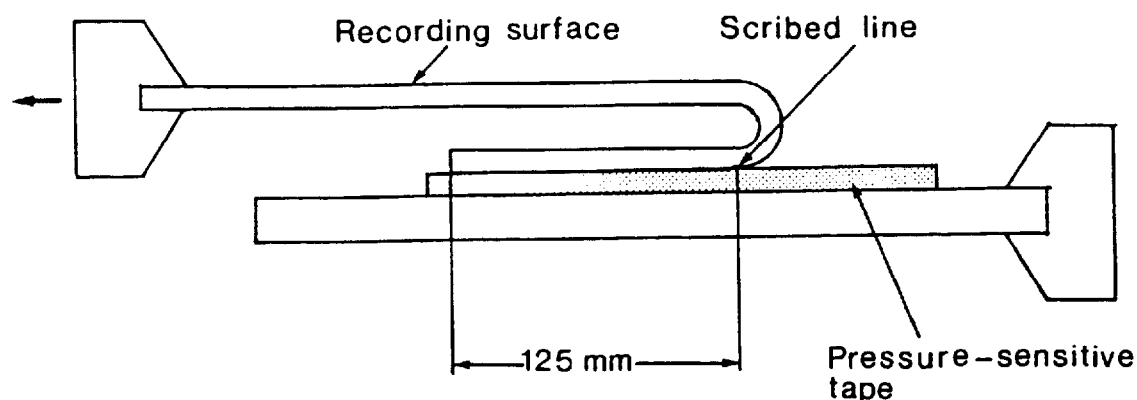


Figure 1 - Coating adhesion

7.12 Flexural rigidity

The flexural rigidity of the tape in the longitudinal direction shall be between 0,06 N·mm² and 0,16 N·mm².

Procedure:

Clamp a 180 mm test piece of tape in a universal testing machine, allowing a 100 mm separation between the machine jaws. Set the jaw separation speed at 5 mm per minute. Plot force against distance. Calculate the flexural rigidity using the slope of the curve between 2,2 N and 6,7 N by the formula

$$E = \frac{\delta F / WT}{\delta L / L}$$

$$I = WT^3 / 12$$

$$\text{Flexural rigidity} = EI$$

where

δF is the change in force in newtons;

T is the measured thickness in millimetres;

W is the measured width in millimetres;

$\delta L/L$ is the change in sample length between the jaws divided by the original length between the jaws.

7.13 Electrical resistance of coated surfaces

The electrical resistance of any square area of the recording surface shall be within the range


- $10^5 \Omega$ to $5 \times 10^8 \Omega$ for non-backcoated tapes;
- $10^5 \Omega$ to $5 \times 10^9 \Omega$ for backcoated tapes.

The electrical resistance of any backcoating shall be less than $10^6 \Omega$.

Procedure:

Condition a test piece of tape to the test environment for 24 h. Position the test piece over two 24-carat gold-plated, semi-circular electrodes having a radius $r = 25,4 \text{ mm}$ and a finish of at least N4, so that the recording surface is in contact with each electrode. These electrodes shall be placed parallel to the ground and parallel to each other at a distance $d = 12,7 \text{ mm}$ between their centres. Apply a force F of $1,62 \text{ N}$ to each end of the sample. Apply a d.c. voltage of $500 \text{ V} \pm 10 \text{ V}$ across the electrodes and measure the resulting current flow. From this value, determine the electrical resistance.

Repeat for a total of five positions along the test piece and average the five resistance readings. For back-coated tape repeat the procedure with the backcoating in contact with the electrodes.

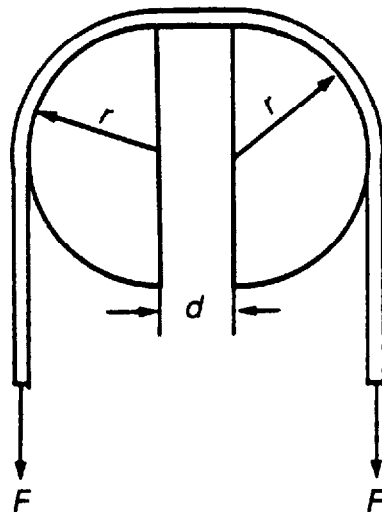

When mounting the sample, make sure that no conducting paths exist between the electrodes except that through the coating under test.

Note 6 - Particular attention should be given to keeping the surfaces clean.

7.14 Tape durability

This International Standard does not specify parameters for assessing tape durability.

However, a recommended procedure is described in annex D.

7.15 Inhibitor tape

This International Standard does not specify parameters for assessing whether or not a tape is an inhibitor tape.

However, annex B gives further information on inhibitor tapes.

7.16 Tape abrasivity

Tape abrasivity is the tendency of the tape to wear the tape transport. The length of the wear pattern on a wear bar shall not exceed $56 \mu\text{m}$ when measured as specified in annex C.

7.17 Pre-recording condition

Prior to recording data, or to testing, the tape shall have been erased utilizing alternating magnetic fields of decaying levels (anhysteretic process) to ensure that the remanent magnetic moment of the recording surface does not exceed 20% of the maximum remanent magnetic moment. Annex E specifies the method of measurement.

In addition no low density transitions shall be present on the tape.

7.18 Magnetic recording characteristics

The magnetic recording characteristics shall be as defined by the test requirements given below.

When performing these tests, the output or resultant signal shall be measured on the same relative pass for both a tape calibrated to the Master Standard Reference Tape and the tape under test (read-while-write or first forward-read-pass) on the same equipment.

The following conditions shall apply to the testing of all magnetic recording characteristics, unless otherwise noted.

- tape condition : pre-recording condition
- tape speed : not greater than 2,5 m/s
- read-track : within the written track
- azimuth alignment : not greater than 6° between the mean write transitions and the read gap
- write-gap length : $1,4 \mu\text{m} \pm 0,2 \mu\text{m}$
- write head saturation density : $0,34 \text{ T} \pm 0,03 \text{ T}$
- tape tension : $2,2 \text{ N} \pm 0,2 \text{ N}$
- recording current : Test Recording Current

7.18.1 Typical Field

The Typical Field of the tape shall be between 90% and 110% of the Reference Field.

Traceability to the Reference Field is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.2 Signal amplitude

The Average Signal Amplitude at the physical recording density of 972 ftpmm shall be between 70% and 140% of the SRA.

Traceability to the SRA is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.3 Resolution

The ratio of the Average Signal Amplitude at the physical recording density of 1 458 ftpmm to that at the physical recording density of 972 ftpmm shall be between 80% and 120% of the same ratio for the Master Standard Reference Tape.

Traceability to the resolution of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.4 Overwrite

Overwrite is the ratio of the Average Signal Amplitude of the residual of the fundamental frequency of a tone pattern after being overwritten at 972 ftpmm to the Average Signal Amplitude of the 972 ftpmm signal. The Average Signal Amplitude of the tone pattern is the peak-to-peak amplitude of the sinusoidal signal with equal rms power.


7.18.4.1 Requirement

The overwrite for the tape shall be less than 120% of the overwrite for the Master Standard Reference Tape.

Traceability to the overwrite of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

7.18.4.2 Procedure

Record a tone pattern which shall be the following sequence of flux transitions:



where

$$a_1 = 1,029 \mu\text{m}$$

$$a_2 = 0,514 \mu\text{m}$$

Record a 972 ftpmm signal over the tone pattern. Measure the Average Signal Amplitude of the residual of the fundamental frequency of the tone pattern (one sixth of the frequency of the 972 ftpmm signal) and the Average Signal Amplitude of the 972 ftpmm signal. Both amplitude measurements should be made using suitable filters.

7.18.5 Narrow-band signal-to-noise ratio (NB-SNR)

The Narrow-band signal-to-noise ratio is the Average Signal Amplitude rms power divided by the average integrated (side band) rms noise power, and is expressed in decibels.

7.18.5.1 Requirement

The NB-SNR shall be equal to, or greater than, 30 dB when normalized to a track width of 410 μm . The normalization factor is $\text{dB}(410) = \text{dB}(W) + 10 \log 410/W$, where W is the track width used when measuring $\text{dB}(W)$.

7.18.5.2 Procedure

The NB-SNR shall be measured using a spectrum analyzer with a resolution bandwidth (RBW) of 1 kHz and a video bandwidth (VBW) of 10 Hz. The tape speed shall be 762 mm/s for the frequencies specified below.

The NB-SNR shall be measured as follows:

- Measure the read-signal amplitude of the 972 ftpmm signal, taking a minimum of 150 samples over a minimum length of tape of 46 m.
- On the next pass (read only) measure the rms noise power over the same section of tape and integrate the rms noise power (normalizing for the actual resolution bandwidth) over the range from 332 kHz to 366 kHz.

For other tape speeds all the frequencies shall be linearly scaled.

7.19 Tape quality

The tape quality (including the effects of exposure to storage and transportation environments) is defined by the testing requirements given in the following clauses. The following conditions shall apply to all quality testing requirements.

- | | |
|------------------------------|---|
| - environment | : operating environment |
| - tape condition | : pre-recording condition |
| - tape speed | : 2 m/s |
| - read-track width | : 410 μm |
| - physical recording density | : 972 ftpmm |
| - write-gap length | : 1,4 $\mu\text{m} \pm 0,2 \mu\text{m}$ |

- azimuth alignment : not greater than 6' between the mean write transitions and the read gap
- write head saturation density : $0,34 \text{ T} \pm 0,03 \text{ T}$
- recording current : Test Recording Current
- format : 18 tracks
- tape tension : $2,2 \text{ N} \pm 0,2 \text{ N}$

7.19.1 Missing pulses

A missing pulse is a loss of read signal amplitude. A missing pulse exists when the base-to-peak read signal amplitude is 25%, or less, of half the Average Signal Amplitude for the preceding 25,4 mm of tape.

7.19.2 Missing pulse zones

A missing pulse zone begins with a missing pulse and ends when 64 consecutive flux transitions are detected or a length of 1 mm of tape has been measured.

The missing pulse zone rate shall be less than one in 8×10^6 flux transitions recorded.

7.19.3 Coincident missing pulse zones

There are two 9-track groups in the 18-track format. One group comprises the odd-numbered tracks, the other group comprises the even-numbered tracks. A simultaneous missing pulse zone condition on two or more tracks of a 9-track group is a coincident missing pulse zone.

If a coincident missing pulse zone occurs at the same time in both groups of tracks, it shall be considered as a single coincident missing pulse zone. Its length shall begin with the start of the earliest coincident missing pulse zone and terminate with the end of the latest coincident missing pulse zone.

No 165 m length of tape shall have more than 12 coincident missing pulse zones.

No coincident missing pulse zone shall exceed 50 mm.

Section 3 - Cartridge

8 Dimensional and mechanical characteristics of the cartridge

The cartridge shall consist of the following elements:

- a case,
- a reel for the magnetic tape,
- a magnetic tape wound on the hub of the reel,
- a locking mechanism for the reel,
- a write-inhibit mechanism,
- a leader block,
- a latching mechanism for the leader block.

Dimensional characteristics are specified for those parameters deemed mandatory for interchange and compatible use of the cartridge. Where there is freedom of design, only the functional characteristics of the elements described are indicated. Figures 2 to 16 depict a typical implementation.

Where they are purely descriptive the dimensions are referred to three Reference Surfaces A, B and C forming a geometrical trihedral (see figure 2). Where the dimensions are related to the position of the cartridge in the drive, they may be referred to another surface of the cartridge. Figures 3 to 10 show the dimensions of the empty case.

- Figure 2 is a general view of the whole cartridge.
- Figure 3 shows the front side of the case which lies on Reference Surface A.
- Figure 4 shows the top side of the case.
- Figure 5 shows the rear side of the case.

Figure 6	shows the bottom side of the case which lies in Reference Surface C.
Figure 7	shows the side of the case which lies in Reference Surface B.
Figure 8	shows an enlarged view of a part of figure 3.
Figure 9	shows an enlarged cross-section of a location notch.
Figure 10	shows an enlarged cross-section of a detail of the opening of the case.
Figure 11	shows an enlarged partial cross-section of the cartridge in hand.
Figure 12	shows the same cross-section as figure 11 but of the cartridge in the drive.
Figure 13	shows schematically the teeth of the toothed rim.
Figure 14	shows two views and an enlarged cross-section of the leader block.
Figure 15	shows the fixation of the tape to the leader block.
Figure 16	shows the leader block inserted in the case.

8.1 Overall dimensions (figures 3 to 5)

The overall dimensions of the case shall be

$$l_1 = 125,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_2 = 109,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_3 = 24,50 \text{ mm} \begin{array}{l} + 0,50 \text{ mm} \\ - 0,32 \text{ mm} \end{array}$$

The corners of the case shall be rounded off as specified by

$$r_1 = 3,00 \text{ max.}$$

$$r_2 = 4,00 \text{ max.}$$

$$r_3 = 3,00 \text{ min.}$$

8.2 Write-inhibit mechanism (figures 3 and 4)

The write-inhibit mechanism shall have a flat surface identified by a visual mark, e.g. a white spot, when in the position in which writing is inhibited.

The flat surface shall be accessible through a window in the front side of the case. The location and dimensions of the window are specified by

$$l_4 = 11,80 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_5 = 15,60 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_6 = 7,40 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_7 = 12,00 \text{ mm} \pm 0,25 \text{ mm}$$

In the write-inhibit position the flat surface of the write-inhibit mechanism shall be behind this window at a distance

$$l_8 = 2,55 \text{ mm min.}$$

from the front side of the case.

In the write-enable position this surface shall be within 0,25 mm of the front side of the case.

The force required for the operation of the write-inhibit mechanism shall be in the range

$$2 \text{ N to } 9 \text{ N}$$

when applied tangentially to the surface of the case.

This International Standard does not prescribe the actual implementation of the write-inhibit mechanism. For example, it can be a rotatable or a slidable element. The implementation may require a larger or additional window but shall not impair the integrity of the case against potential contaminants.

8.3 Label area of the rear side (figures 4 to 5)

On the rear side of the case there shall be a label area specified by

$$l_9 = 7,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{10} = 80,00 \text{ mm} \begin{array}{l} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{array}$$

$$l_{11} = 12,30 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{12} = 0,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_4 = 1,00 \text{ mm max.}$$

8.4 Label area of the top side (figure 4)

On the top side of the case there shall be a label area, recessed by $0,50 \text{ mm} \pm 0,25 \text{ mm}$, specified by l_9 , l_{10} , l_{12} and in addition by

$$l_{13} = 31,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{14} = 75,00 \text{ mm} \begin{array}{l} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{array}$$

8.5 Case opening (figures 3, 4, 6 and 8)

The case shall have an opening for the tape in which the leader block can be inserted (see also figure 16). This opening shall be specified by

$$l_{15} = 4,70 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{16} = 14,90 \text{ mm} \pm 0,32 \text{ mm}$$

$$l_{17} = 7,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{18} = 87,10 \text{ mm} \pm 0,25 \text{ mm}$$

$$l_{19} = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$r_5 = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$\alpha = 50^\circ \pm 1^\circ$$

Moreover, figure 8 shows at a larger scale the details of the configuration of the case opening as seen at the right-hand side of figure 3.

$$l_{61} = 3,9 \text{ mm} \pm 0,5 \text{ mm}$$

$$l_{62} = 16,9 \text{ mm} \begin{array}{l} + 0,5 \text{ mm} \\ - 0,4 \text{ mm} \end{array}$$

$$l_{63} = 3,0 \text{ mm} \pm 0,5 \text{ mm}$$

$$l_{64} = 11,6 \text{ mm} \pm 0,5 \text{ mm}$$

$$\omega_1 = 1^\circ \pm 30'$$

$$\omega_2 = 20^\circ \pm 2^\circ$$