INTERNATIONAL STANDARD

ISO/IEC 15149

First edition
2011-12-01

Information technology — Telecommunications and information exchange between systems — Magnetic field area network (MFAN)

Technologies de l'information — Téléinformatique — Réseau de zone de champ magnétique (MFAN)

Reference number
ISO/IEC 15149:2011(E)

Documents
Document Sharing Hub

© ISO/IEC 2011

Full document details: ISO_IEC 15149_2011

COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub

Full document details: ISO_IEC 15149_2011

Contents

Page

Foreword v
1 Scope 1
2 Terms and definitions 2
3 Symbols and abbreviated terms 3
4 Overview 4
5 Network elements 6
5.1 General 6
5.2 Time element 6
5.2.1 Request period 7
5.2.2 Response period 7
5.2.3 Spontaneous period 7
5.2.4 Network activation 7
5.3 Physical element 8
5.3.1 MFAN-C 8
5.3.2 MFAN-N 8
5.4 Address element 8
5.4.1 MFAN ID 8
5.4.2 UID 9
5.4.3 Group ID 9
5.4.4 Node ID 9
6 Network status 10
6.1 General 10
6.2 Network configuration 10
6.3 Network association 10
6.4 Network disassociation 10
6.5 Data transmission 10
6.6 Network release 10
6.7 MFAN device state 10
6.7.1 MFAN-C state 11
6.7.2 MFAN-N state 11
7 PHY layer 13
7.1 PHY layer frame format 13
7.1.1 General 13
7.1.2 Preamble 13
7.1.3 Header 13
7.1.4 Payload 15
7.1.5 Frame check sequence (FCS) 15
7.2 Coding and modulation 16
7.2.1 Coding 16
7.2.2 The data rate and coding type 17
7.2.3 Modulation 18
7.2.4 The coding and modulation process 18
8 MAC layer frame format 20
8.1 General 20
8.2 Frame format 20
8.2.1 Frame header 20
8.2.2 Frame body 21
8.3 Frame type 22

Documents
Document Sharing Hub

© ISO/IEC 2011 – All rights reserved

Full document details: ISO_IEC 15149_2011

8.3.1 Request frame 22
8.3.2 Response frame 23
8.3.3 Data frame 23
8.3.4 Acknowledgement frame 23
8.4 Payload format 24
8.4.1 Request frame 24
8.4.2 Response frame 27
8.4.3 Data frame 29
8.4.4 Acknowledgement frame 29

9 MAC layer function 33
9.1 General 33
9.2 Network association and disassociation 33
9.2.1 Association 33
9.2.2 Disassociation 34
9.2.3 Association status check 34
9.3 Data transmission 35
9.3.1 Transmission in the response period 35
9.3.2 Transmission in the spontaneous period 35
9.4 Group ID set-up 36

10 Air interface 37
10.1 Frequency 37
10.2 Signal waveform 37

Annex A (informative) **Network Security** 39

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 15149 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

Documents
Document Sharing Hub

Full document details: ISO_IEC 15149_2011

Information technology — Telecommunications and information exchange between systems — Magnetic field area network (MFAN)

1 Scope

This International Standard specifies the physical layer and media access control layer protocols of a wireless network over a magnetic field in a low frequency band (~300 kHz), for wireless communication in harsh environments (i.e. around metal, underwater, underground, etc.).

The physical layer protocol is designed for the following scope:

— low carrier frequency for large magnetic field area and reliable communication in harsh environments;

— simple and robust modulation for a low implementation cost and error performance;

— variable coding and bandwidth for a link adaptation.

The media access control layer protocol is designed for the following scope:

— simple and efficient network topology for low power consumption;

— variable superframe structure for compact and efficient data transmission;

— dynamic address assignment for small packet size and efficient address management.

This International Standard supports several kbps data transmission in a wireless network within a distance of several metres. It can be applied to various services such as the following areas:

— in the environmental industry, to manage pollution levels in soil and water using wireless underground or underwater sensors;

— in the construction industry, to monitor the integrity of buildings and bridges using wireless, inner-corrosion sensors;

— in the consumer-electronics industry, to detect food spoilage in wet, airtight storage areas and to transfer the sensing data from the inside to the outside;

— in the agricultural industry, to manage the moisture level as well as mineral status in soil using buried wireless sensors;

— in the transportation industry, to manage road conditions and traffic information using wireless underground sensors.

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1
magnetic field area network
MFAN
wireless network that provides reliable communication in harsh environments using magnetic field

2.2
magnetic field area network coordinator
MFAN-C
device that manages the connection and release of nodes within the communication area and the sending and receiving time of data in an MFAN

2.3
magnetic field area network node
MFAN-N
device except the coordinator that forms a network in an MFAN

© ISO/IEC 2011 – All rights reserved
Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

3 Symbols and abbreviated terms

ARq	Association Request
ARs	Association Response
ARA	Association Response Acknowledgement
ASC	Association Status Check
ASK	Amplitude Shift Keying
ASRq	Association Status Request
ASRs	Association Status Response
ASRA	Association Status Response Acknowledgement
BPSK	Binary Phase Shift Keying
CRC	Cyclic Redundancy Check
DA	Data Acknowledgement
DaRq	Disassociation Request
DaRs	Disassociation Response
DaRA	Disassociation Response Acknowledgement
DRq	Data Request
DRs	Data Response
DRA	Data Response Acknowledgement
FCS	Frame Check Sequence
GSRq	Group ID Set-up Request
GSRs	Group ID Set-up Response
GSRA	Group ID Set-up Response Acknowledgement
HCS	Header Check Sequence
LSB	Least Significant Bit
MAC	Media Access Control
MFAN	Magnetic Field Area Network
MFAN-C	Magnetic Field Area Network Coordinator
MFAN-N	Magnetic Field Area Network Node
NRZ-L	Non-Return-to-Zero Level
PHY	PHYsical layer protocol
RA	Response Acknowledgement
RR	Response Request
SIFS	Short InterFrame Space
TDMA	Time Division Multiple Access
UID	Unique IDentifier

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

4 Overview

MFAN is a wireless communication network that can transmit and receive data over a magnetic field in a low frequency band. Wireless communication over a magnetic field enables reliable communication and extends the communication system coverage around metal, soil, and water. It is designed using those characteristics of the magnetic field communication. It uses a low carrier frequency for reliable communication and large magnetic field area in harsh environments, a simple and robust modulation like BPSK for a low implementation cost and error probability, and a dynamic coding technique like Manchester or NRZ-L coding for noise robustness. In essence, it provides several kbps data transmission within a distance of several meters.

Also, it uses a simple and efficient network topology like a star topology for low power consumption. The dynamic address assignment is used for the small packet size and efficient address management, and the adaptive link quality control is considered with variable data transmission speed and coding. The devices in MFAN are specified into two elements according to the role: MFAN-C for a coordinator, and MFAN-N for a node. In a network, there can be one coordinator. When a node joins the network, the coordinator assigns the time-slots for each device upon the node's request and the coordinator's decision. So, TDMA is considered for the data transmission.

As shown in Figure 1, MFAN-Ns are buried under the ground, and MFAN-C is placed above the ground. If MFAN-N receives the sensing data from the sensors, MFAN-N sends its received data to MFAN-C over a magnetic field. MFAN-C sends the received data from MFAN-N to the monitoring center by either wireless or wired communication for long distance.

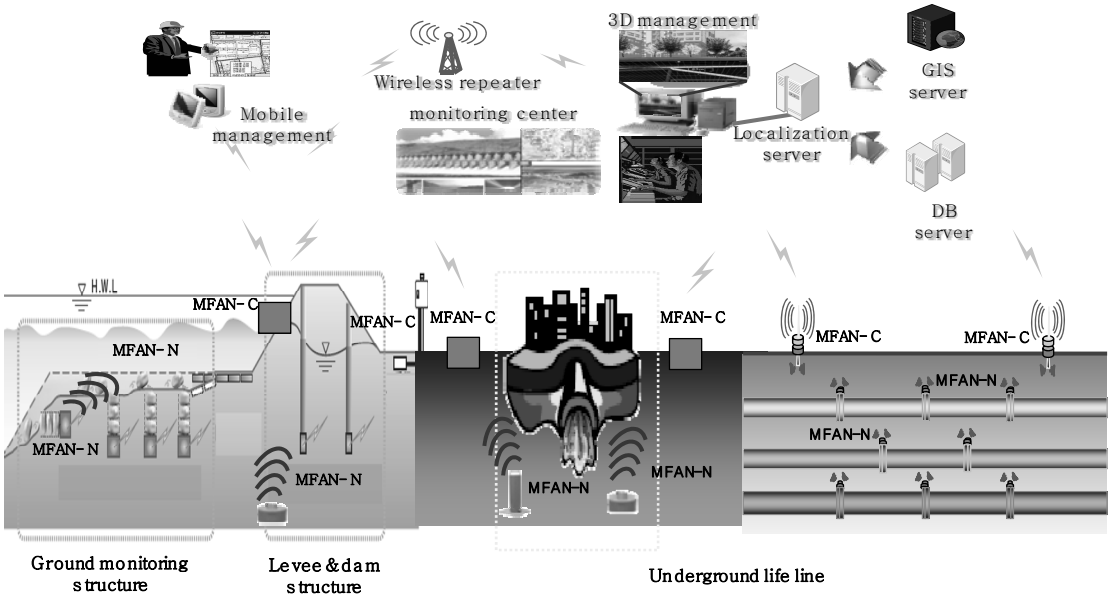

Figure 1 – Underground monitoring system

Wireless communication in harsh environments has been significantly required in various industries. It is difficult for a sensor node to transmit its data by a radio frequency around metal, soil, and water with the existing standards of wireless communication. MFAN is an alternative standard that enables several sensor nodes inside metal, soil, and water to transfer their data to a coordinator outside using the characteristics of magnetic field. Therefore it can be applied to various services in harsh environments.

© ISO/IEC 2011 – All rights reserved
Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

For example, in ground status monitoring as shown in Figure 2, the sensor nodes can be buried under the ground to sense ground cave-in, ground sinking, land sliding, and so on. Another example of MFAN is the underground infrastructure management in Figure 3. In this example, the sensor nodes are attached to the pipes, and can detect gas or water leaks and notify its location. For the building and bridge management in Figure 4, the sensor nodes can be placed on beams and columns to detect the integrity of the structure. In pollution monitoring as shown in Figure 5, the sensor nodes can detect the quality of the soil and water. It can detect poisonous chemical, pH(Hydrogen ion exponent), and temperature by sensor nodes that are placed below ground and water.

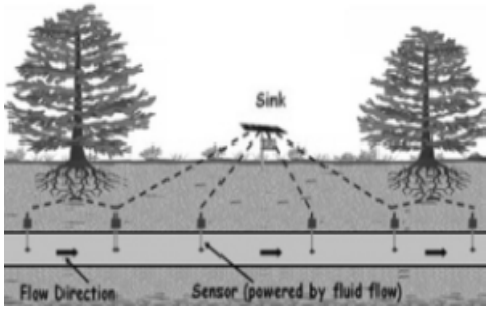

Figure 2 – Ground status monitoring

Figure 3 – Underground infrastructure management

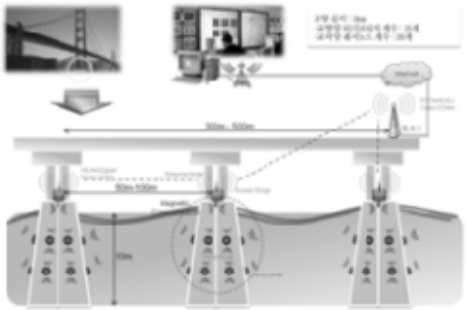

Figure 4 – Building & bridge management

Figure 5 – Pollution monitoring

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

5 Network elements

5.1 General

The main elements of MFAN are divided into time and physical element. The time element refers to the superframe consisting of a request period, a response period, and a spontaneous period, and the physical element refers to the network consisting of MFAN-C and MFAN-Ns. The most basic one in the physical element is the node. Node is classified into two types: MFAN-C to manage the network and MFAN-N to communicate with MFAN-C.

Figures 6 and 7 show the structures of superframe and network which are the time and physical elements, respectively. The node that needs to be decided first in MFAN is MFAN-C, and the superframe begins with MFAN-C transmitting a request packet in the request period. MFAN-C is charged of managing the association, disassociation, release, and scheduling of MFAN-Ns. One MFAN can use one channel where only one node is utilized as MFAN-C and the rest of them become MFAN-N. The rest of the nodes in MFAN excluding MFAN-C become MFAN-N. Note that any nodes can become either MFAN-C or MFAN-N depending upon its role. Basically, a peer-to-peer connection between MFAN-C and MFAN-N is considered.

5.2 Time element

The time element used in MFAN is the time slot of the TDMA method. MFAN-C manages the MFAN-N group that transmits data in the response period, and the time slots are self-arranged by the selected MFAN-Ns. The superframe of MFAN, as shown in Figure 6, consists of a request period, a response period, and a spontaneous period, and the lengths of the request and response period are variable. The superframe begins with MFAN-C transmitting a RR packet to MFAN-Ns in the request period.

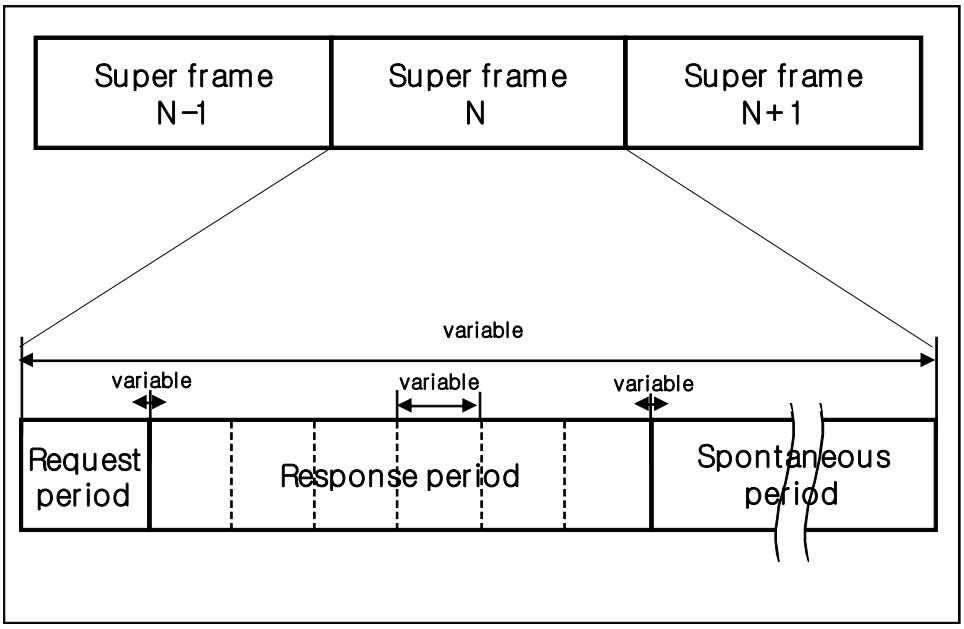

Figure 6 – MFAN superframe structure

The RR packet has information which MFAN-Ns can send response packets during response periods, and the selected MFAN-Ns can transmit the response packet in the response period according to the RR packet information.

© ISO/IEC 2011 – All rights reserved
Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

5.2.1 Request period

In the request period, MFAN-C transmits the RR packet with the information about the usage of MFAN-Ns in order for MFAN-N to send the response packet during response periods.

5.2.2 Response period

In the response period, MFAN-N can transmit response packet according to the received RR packet of MFAN-C, and the response period can be divided into several time slots according to the number of the selected MFAN-Ns in MFAN. Each time slot length is variable according to the length of the response frame and the acknowledgement. If the MFAN-C schedules a response period, the slot number is decided by the order of the divided time slot. Otherwise the slot number is zero. MFAN-C assigns time slots to either MFAN-N or a particular group for the use of the response period, and the nodes in the assigned group independently transmit the data frame in the response period.

5.2.3 Spontaneous period

The spontaneous period begins when there is no node transmitting the response packet for a certain period of time. In this period, nodes can transmit data even without MFAN-C's request. This period is maintained until MFAN-C transmits a request packet.

5.2.4 Network activation

The superframe of MFAN is divided into the request period, the response period, and the spontaneous period. MFAN-C and MFAN-Ns in MFAN operate in each period as follows:

5.2.4.1 Request packet transmission within the request period

In the request period, MFAN-C sends the RR packet to MFAN-Ns. Based on this, the MFAN-N that have received the RR packet decide whether to transmit response packets in the response period. MFAN-C can determine the MFAN-N group to transmit in the response period.

5.2.4.2 Response packet transmission within the response period

The MFAN-Ns selected by MFAN-C can transmit the response packet in the response period. When MFAN-N transmits the response packet in the response period, MFAN-C that has received the response packet transmits the RA packet. MFAN-N that has not received the RA packet transmits response packets every time-slot until it receives a RA packet from MFAN-C.

5.2.4.3 Data packet transmission in the spontaneous period

A spontaneous period begins if MFAN-N does not transmit any response packets for a certain period of time, and this period is maintained until MFAN-C transmits a RR packet. In the spontaneous period, MFAN-N can transmit data without the request of MFAN-C.

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

5.3 Physical element

The physical element configuring MFAN is divided into MFAN-C and MFAN-N in which all MFAN-Ns are connected into MFAN-C (i.e. a central connectivity device). The basic element, node, is distinguished into MFAN-C and MFAN-N according to its role. MFAN-C manages the whole MFAN and there must exist only one MFAN-C per one network. MFAN-C manages MFAN-N by sending the RR packet. MFAN-N must transmit response packets according to MFAN-C's management. MFAN can be configured as shown in Figure 7.

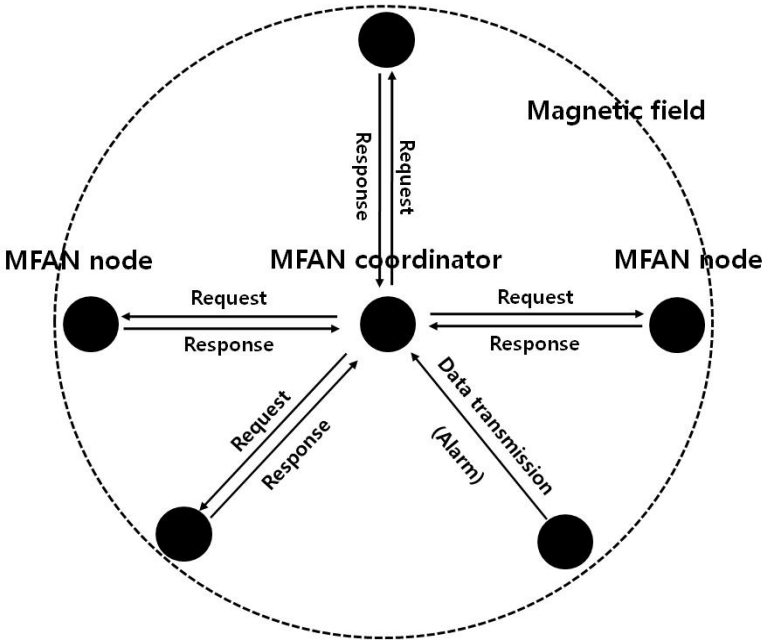

Figure 7 – MFAN

5.3.1 MFAN-C

MFAN-C is a node that manages MFAN; only one MFAN-C exists per one network, and it manages and controls MFAN-N by the RR packet.

5.3.2 MFAN-N

MFAN-N is a node that resides within an MFAN (excluding MFAN-C), and a maximum of 65,519 MFAN-Ns can exist per network. It transmits response packets according to the RR packet transmitted by MFAN-C.

5.4 Address element

In order to identify MFAN-Ns, MFAN uses address systems such as MFAN ID, UID, group ID and node ID.

5.4.1 MFAN ID

MFAN has its own ID that identifies each network from the others; the value should not be duplicated in other MFANs, and the value is maintained as long as MFAN exists. Its value is defined by user to distinguish networks.

© ISO/IEC 2011 – All rights reserved
Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011

5.4.2 UID

UID is a unique identifier consisting of 64 bits; it consists of group ID, IC manufacturer's code, and IC manufacturer's serial number. MFAN-N is identified by UID.

Unit: Byte

1	1	6
Group ID	IC manufacturer's code	IC manufacturer's serial number

Figure 8 – UID structure

5.4.3 Group ID

MFAN-N can be grouped by applications. Group ID is the identifier for the grouped MFAN-Ns within the network. MFAN-C can request a response to a specific MFAN-N group in order to mitigate the packet collision. Some group IDs are reserved in Table 1. Its value is defined by user to distinguish groups.

Table 1 – Reserved group ID

Group ID	Content	Remarks
0xFF	All groups	When selecting all groups
0xF0 – 0xFE	Reserved	-

5.4.4 Node ID

Node ID is an identifier used instead of UID to identify nodes, and it has a 16 bit address assigned by MFAN-C. Some node IDs are reserved in Table 2.

Table 2 – Reserved node ID

Node ID	Content	Remarks
0xFFFF	All nodes	When broadcasting or transmitting all nodes
0xFFFE	Unjoined node	Default ID for MFAN-N
0xFFF0 – 0xFFFD	Reserved	-

© ISO/IEC 2011 – All rights reserved

Documents
Document Sharing Hub
Full document details: ISO_IEC 15149_2011