INTERNATIONAL STANDARD

ISO/IEC 2593

Third edition
1993-03-15

Information technology — Telecommunications and information exchange between systems — 34-pole DTE/DCE interface connector mateability dimensions and contact number assignments

Technologies de l'information — Télécommunications et échange d'information entre systèmes — Dimensions de branchement du connecteur d'interface ETTD/ETCD à 34 pôles et affectation des numéros de contact

Reference number
ISO/IEC 2593:1993(E)

AVA Documents
Document Sharing Hub

Full document details: ISO_IEC 2593_1993

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 2593 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

This third edition cancels and replaces the second edition (ISO 2593:1984), of which certain terms and definitions have been aligned with those used in IEC. In addition, an informative annex has been added which specifies passive adaptors for use by a DTE that has implemented the 34-pole connector for attachment to a DCE that has implemented the 37-pole rectangular ISO 4902 connector or the 15-pole rectangular ISO 4903 connector instead.

Annex A forms an integral part of this International Standard. Annex B is for information only.

© ISO/IEC 1993
All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Documents
Document Sharing Hub

Full document details: ISO_IEC 2593_1993

Information technology — Telecommunications and information exchange between systems — 34-pole DTE/DCE interface connector mateability dimensions and contact number assignments

1 Scope

This International Standard specifies the 34-pole connector and the assignment of contact numbers at the interface between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) where CCITT[1] Recommendation V.35 or Recommendation X.21bis together with Recommendation V.10 and V.11 are applicable.

NOTE 1 An interoperation between interfaces designed according to electrical characteristics specified in CCITT Recommendation V.35 and those specified in CCITT Recommendation V.11 is, at least to a limited degree, possible. This can be achieved, for example, by using a passive adaptor which joins the interface connectors in accordance with ISO 2593 and ISO 4902 or ISO 4903, respectively.

This International Standard specifies the dimensions of the connector housing and gives recommendations for the type of locking device (jack-screw system) and connector shielding.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 261:1973, *ISO general purpose metric screw threads — General plan.*

ISO 4902:1990, *Information technology — Data communication — 37-pole DTE/DCE interface connector and contact number assignments.*

ISO 4903:1989, *Information technology — Data communication — 15-pole DTE/DCE interface connector and contact number assignments.*

CCITT Recommendation V.10 (or X.26):1988, *Electrical characteristics for unbalanced double-current interchange circuits for general use with integrated circuit equipment in the field of data communications.*

CCITT Recommendation V.11 (or X.27):1988, *Electrical characteristics for balanced double-current interchange circuits for general use with integrated circuit equipment in the field of data communications.*

CCITT Recommendation X.21:1988, *Interface between data terminal equipment (DTE) and data circuit-terminating equipment (DCE) for synchronous operation on public data networks.*

CCITT Recommendation X.21bis:1988, *Use of public data networks on data terminal equipment (DTE) which is designed for interfacing to synchronous V-series modems.*

CCITT Recommendation V.28:1988, *Electrical characteristics for unbalanced double-current interchange circuits.*

1) International Telegraph and Telephone Consultative Committee.

AVA Documents
Document Sharing Hub

Full document details: ISO_IEC 2593_1993

CCITT Recommendation V.35:1984, *Data transmission at 48 kilobits per second using 60-108 kHz group band circuits.*[2)3)]

IEC 50(581):1978, *International Electrotechnical Vocabulary — Chapter 581: Electromechanical components for electronic equipment.*

IEC 807-6:1988, *Rectangular connectors for frequencies below 3 MHz — Part 6: Detail specification for a range of connectors with size 20 (7.5 A) round contacts having polarized guides — Fixed solder contact types.*

3 Definitions

For the purposes of this International Standard, the definitions given in IEC 50(581) apply. For the convenience of the users of this International Standard, the following definitions are repeated.

3.1 cable adaptor: A part of a connector or an accessory consisting of a rigid housing for attachment to the connector body. It may incorporate provision for a cable clamp or seal for terminating screens and provide shielding to electrical interference. It may be straight or angled.

3.2 connector housing: The part of a connector into which the insert and contacts are assembled.

3.3 contact arrangement: The number, spacing and configuration of contacts in a component.

3.4 female contact: A contact intended to make electrical engagement on its inner surface and which will accept entry of a male contact.

3.5 intermateable connectors: Two connectors are intermateable when they are capable of being connected electrically and mechanically but without regard to their performance and intermountability.

3.6 jack-screw system: A device comprising a set of captive screws and nuts used to couple and uncouple mating components. It may also provide a polarization facility.

3.7 locking device: A feature incorporated in certain components to provide mechanical retention of their mating part.

3.8 male contact: A contact intended to make electrical engagement on its outer surface and which will enter a female contact.

3.9 mounting flange: A projection from a component for the purpose of attaching the component to a rigid surface.

3.10 (n-pole-)connector: A component which terminates conductors for the purpose of providing connection and disconnection to a suitable mating component.

3.11 polarization: Features on mating components to prevent incorrect mating.

4 Connector specifications

A 34-pole connector shall be provided for the DTE/DCE interface.

Figures 1 to 5 illustrate the 34-pole connector. Only those dimensions that are essential for mating are shown.

Figure 1 illustrates the DTE connector which has 34 male contacts in a connector housing. Figure 2 illustrates the DCE connector which has 34 female contacts in a connector housing. The connector housing on the DTE connector is dimensioned to fit inside the connector housing on the DCE connector (see figures 1 and 2). Contact identification lettering is also specified in figures 1 and 2. The use of shields and mounting flanges is illustrated in figures 1 and 2 respectively. Since their shape and size is not essential for mating, the use of different shape and size from those illustrated does not affect conformance with this International Standard.

Figure 3 illustrates the dimensions for the contact spacing.

Figures 4 and 5 illustrate the dimensions for the male and female contacts respectively.

Figures 8 and 9 illustrate the connector mountings.

The connectors shall be equipped with a jack-screw system (see figures 6 and 7 and tables 2 and 3). On the DTE connector, the female jack-screw (nut) shall be positioned adjacent to the male contact lettered A and the male jack-screw shall be positioned adjacent to the male contact lettered MM. Both jack-screws of the DTE connector shall be rotateable. On the DCE connector, the female jack-screw (nut) shall be positioned adjacent to the female contact lettered MM and the male jack-screw shall be positioned adjacent to the female contact lettered A. Both jack-screws of the DCE connector shall be fixed to prevent rotation.

Connectors shall use either the 6-32 UNC thread in accordance with the present specification of

2) Other CCITT Recommendations for group band modems, viz. V.36 and V.37, are available.

3) In the Melbourne, 1988, version of the V.-series Recommendations, the text of Recommendation V.35 has been replaced by a note stating CCITT's intention to withdraw this Recommendation and discourage its use in new equipment.

AVA Documents
Document Sharing Hub

Full document details: ISO_IEC 2593_1993

IEC 807-6 or, if required by national regulations or mutual user agreement, M 3 as specified in ISO 261.

When procuring equipment internationally which will use this 34-pole connector, the user shall specify the thread type in accordance with national requirements.

NOTES

2 The nominal contact diameter of 1,6 mm is referred to as size 16 in IEC 807-7.

3 The first edition of this International Standard did not specify all the connector dimensions required to ensure mechanical compatibility. As a result, contacts with nominal diameter of both 1 mm and 1,6 mm and two different arrangements of male shell and female shell and different dimensions of jack-screws are now in use in different countries. This International Standard specifies 1,6 mm contacts and the particular arrangement of male shell and of female shell described above; where arrangements occur which do not conform with this edition, adaptors can be necessary.

4 The male shell specified in this International Standard does not contain the optional polarizing pin specified in IEC 807-6.

5 Assignment of contact letters

The assignment of contact letters is given in table 1.

6 Connector shielding

Connector shielding is optional. If it is used, e.g. due to national regulations, etc., it shall be accomplished by the use of

— a metallic male shell together with a connector housing and a cable adaptor with a DTE connector; or

— a metallic female shell with a DCE connector.

A polarization pin shall not be used on the male shell.

Table 1 — Assignment of contact numbers

Contact	Function[1)]	CCITT circuit number	Direction
A	See note 1	—	—
B	Signal ground or common return	102	common
C	Request to send	105	from DTE
D	Ready for sending	106	to DTE
E	Data set ready	107	to DTE
F	Data channel received line signal detector	109	to DTE
H	Connect data set to line (see note 2)	108/1	from DTE
	Data terminal ready (see note 2)	108/2	from DTE
J	Calling indicator (see note 2)	125	to DTE
K	F_1	—	—
L	Local loopback (see note 2)	141	from DTE
M	F_1	—	—
N	Loopback/Maintenance test	140	from DTE
R	Received data A-wire	104	to DTE
T	Received data B-wire	104	to DTE
V	Receiver signal element timing (DCE source) A-wire	115	to DTE
X	Receiver signal element timing (DCE source) B-wire	115	to DTE
Y	Transmitter signal element timing (DCE source) A-wire	114	to DTE
AA	Transmitter signal element timing (DCE source) B-wire	114	to DTE
P	Transmitted data A-wire	103	from DTE
S	Transmitted data B-wire	103	from DTE
U	Transmitter signal element timing (DTE source) A-wire (see note 2)	113	from DTE
Z	F_2	—	—
W	Transmitter signal element timing (DTE source) B-wire (see note 2)	113	from DTE
BB	F_2	—	—
CC	F_3	—	—

AVA Documents
Document Sharing Hub

Full document details: ISO_IEC 2593_1993

Contact	Function[1)]	CCITT circuit number	Direction
DD	F_4	—	—
EE	F_3	—	—
FF	F_4	—	—
HH	N_1	—	—
JJ	N_2	—	—
KK	N_1	—	—
LL	N_2	—	—
MM	F	—	—
NN	Test indicator (see note 2)	142	to DTE

NOTES

1 Contact A is assigned for connecting the shields between tandem sections of the shielded interface cable. The shield may be connected either to protective ground or to signal ground at either the DTE or the DCE or both in accordance with national regulations.

Signal ground may further be connected to protective ground in accordance with national safety regulations. Caution should be exercised to prevent establishment of ground loops carrying high currents.

2 These functions are not included in CCITT Recommendation V.35 but where implemented on an optional basis the assigned contacts should be used.

1) Legend:

N = Contact permanently reserved for national use

F = Contact reserved for future standardization purposes and should not be used for national use

Subscripts indicate contacts which may be associated to form pairs; for example, F_1 on contacts K and M form a pair.

Documents
Document Sharing Hub
Full document details: ISO_IEC 2593_1993

Dimensions in millimetres

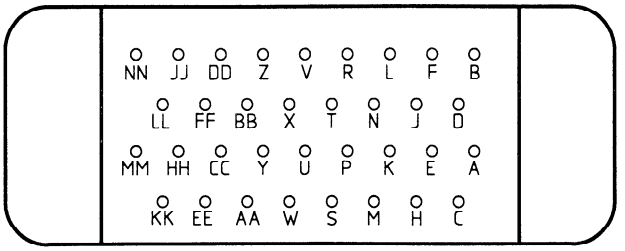

DTE contact arrangement viewed from connector front (DCE side)

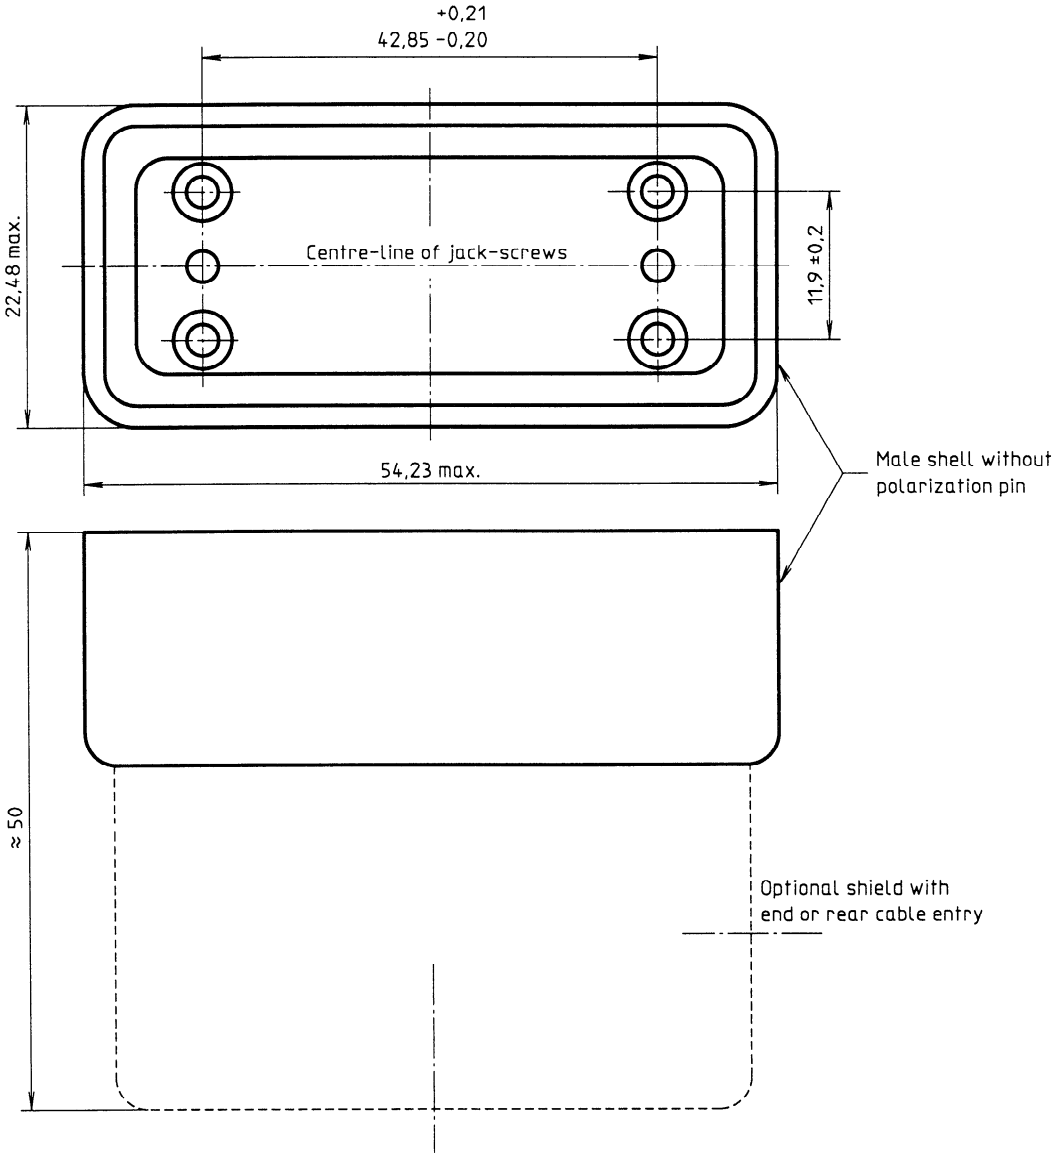

Figure 1 — DTE connector

Documents
Document Sharing Hub
Full document details: ISO_IEC 2593_1993

Dimensions in millimetres

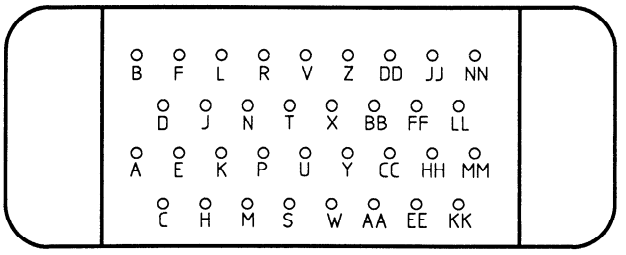

DTE contact arrangement viewed from connector front (DTE side)

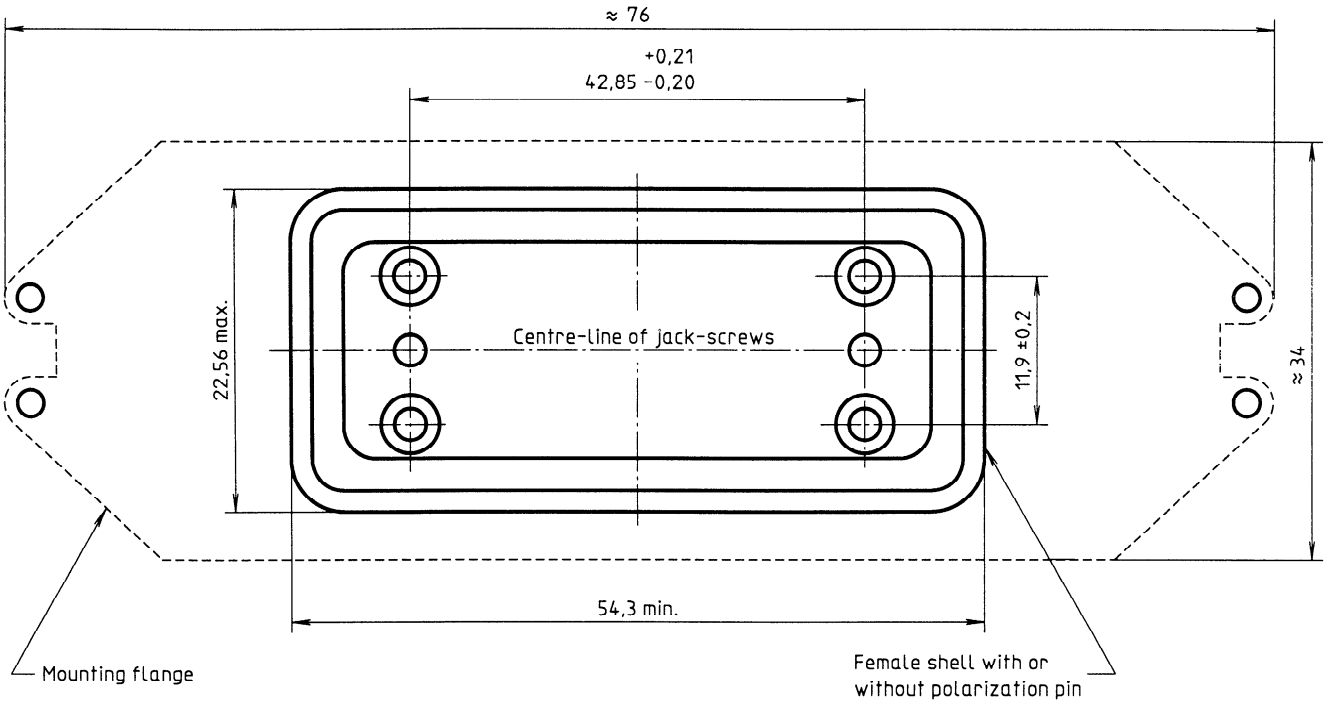

Figure 2 — DCE connector

Documents
Document Sharing Hub
Full document details: ISO_IEC 2593_1993