

ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO RECOMMENDATION R 702

SPINDLE NOSES AND FACE PLATES
TYPES A AND CAMLOCK
SIZES FOR INTERCHANGEABILITY

1st EDITION

March 1968

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

BRIEF HISTORY

The ISO Recommendation R 702, *Spindle noses and face plates—Types A and Cam-lock—Sizes for interchangeability*, was drawn up by Technical Committee ISO/TC 39, *Machine tools*, the Secretariat of which is held by the Association Française de Normalisation (AFNOR).

Work on this question by the Technical Committee began in 1951 and led, in 1965, to the adoption of a Draft ISO Recommendation.

In February 1966, this Draft ISO Recommendation (No. 931) was circulated to all the ISO Member Bodies for enquiry. It was approved, subject to a few modifications of an editorial nature, by the following Member Bodies:

Belgium	Israel	Switzerland
Chile	Italy	Turkey
Czechoslovakia	Japan	U.A.R.
Denmark	Netherlands	United Kingdom
France	Poland	U.S.A.
Germany	Portugal	U.S.S.R.
Hungary	Spain	
India	Sweden	

No Member Body opposed the approval of the Draft.

The Draft ISO Recommendation was then submitted by correspondence to the ISO Council, which decided, in March 1968, to accept it as an ISO RECOMMENDATION.

CONTENTS

	Page
1. Scope	5
2. Interchangeability	5
3. Type A	6
3.1 Spindle noses	6
3.1.1 Sizes in millimetres	7
3.1.2 Sizes in inches	8
3.2 Face plates	9
3.2.1 Sizes in millimetres	11
3.2.2 Sizes in inches	12
4. Type camlock	13
4.1 Spindle noses	13
4.1.1 Sizes in millimetres	15
4.1.2 Sizes in inches	16
4.2 Cams	17
4.2.1 Sizes in millimetres	19
4.2.2 Sizes in inches	20
4.3 Studs	21
4.3.1 Sizes in millimetres	22
4.3.2 Sizes in inches	22
4.4 Face plates	23
4.4.1 Sizes in millimetres	25
4.4.2 Sizes in inches	26
4.5 Accessories for spindle noses and face plates—type Camlock	27
4.5.1 Sizes in millimetres	27
4.5.2 Sizes in inches	28

**SPINDLE NOSES AND FACE PLATES
TYPES A AND CAMLOCK
SIZES FOR INTERCHANGEABILITY**

1. SCOPE

This ISO Recommendation is the first of a series of ISO Recommendations specifying the sizes for interchangeability for lathe spindle noses and face plates and covering the three types selected for international standardization, i.e. A and Camlock types and bayonet type.

The first two types, which are presently in use in most countries, are the subject of this ISO Recommendation, the third type being the subject of ISO Recommendation R . . .,* *Spindle noses and face plates—Bayonet type—Sizes for interchangeability—Metric series.*

2. INTERCHANGEABILITY


Although internal mounting components and assembly screws are not respectively interchangeable, as they may conform with either metric or inch series, there is complete interchangeability for the same type (A or Camlock) between metric spindle noses and face plates in inches and *vice versa*.

* At present Draft ISO Recommendation No. 1327.


3. TYPE A

3.1 Spindle noses - Type A


No. 3

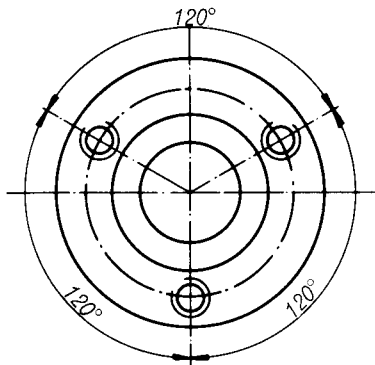



No. 4

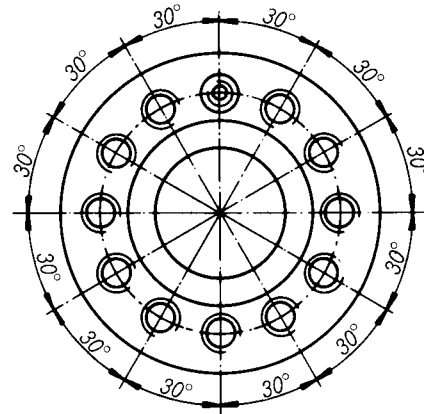

Nos. 5 to 11

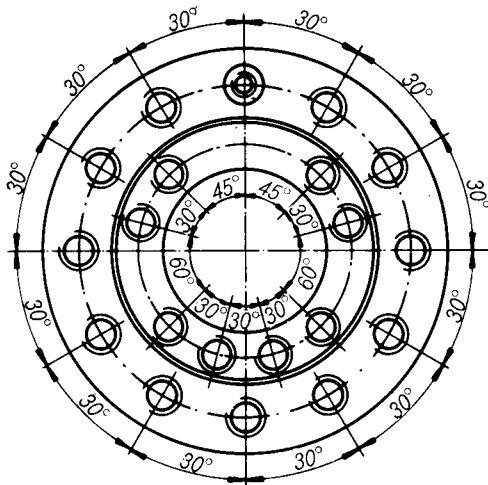


Nos. 15 to 28

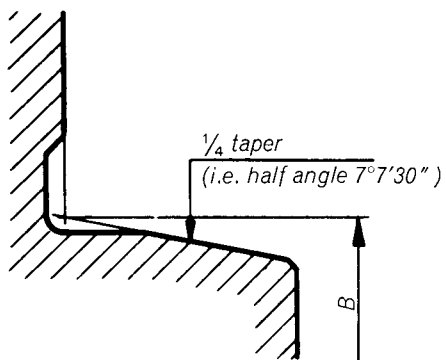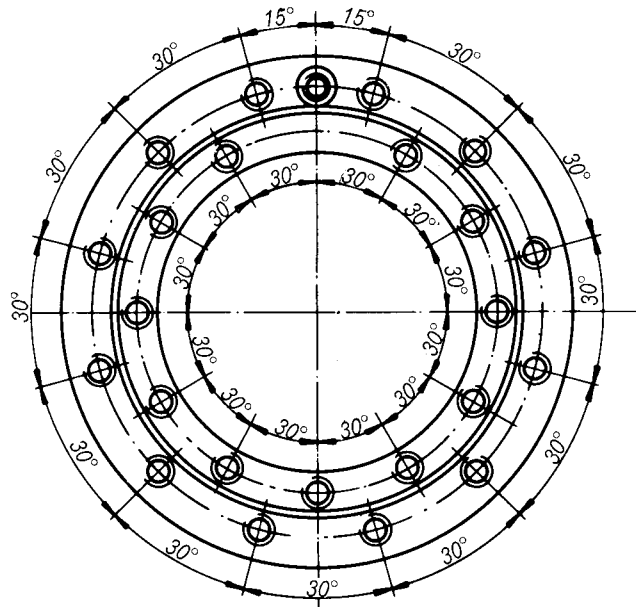

Dimension B is taken at the theoretical point of intersection between the generating line of the cone and the face of the flange

* F_1 for type A_1 , with inner bolt circle
 F_2 for type A_2 , without inner bolt circle

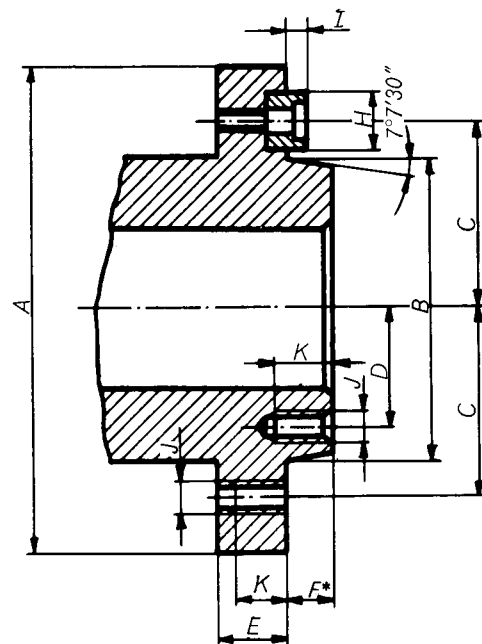

3.1.1 Sizes in millimetres

Type A₁: Two bolt circles with radius *C* and *D*

Type A₂: Only the outer bolt circle with radius *C*

(Type A₂ for Nos. 3 and 4; types A₁ and A₂ for Nos. 5 to 28)

Dimension \ No.	3	4	5	6	8	11	15	20	28	Tolerances
<i>A</i>	92	108	133	165	210	280	380	520	725	
<i>B</i>	53.975	63.513	82.563	106.375	139.719	196.869	285.775	412.775	584.225	+ IT 4 0 ⁽³⁾
<i>C</i>	35.3	41.3	52.4	66.7	85.7	117.5	165.1	231.8	323.8	(1)
<i>D</i>			30.95	41.3	55.55	82.55	123.8	184.15	265.1	(1)
<i>E</i>	16	20	22	25	28	35	42	48	56	
<i>F</i> ₁ *			14.288	15.875	17.462	19.050	20.638	22.225	25.400	(2)
<i>F</i> ₂ *	11	11	13	14	16	18	19	21	24	
<i>H</i>		14.25	15.9	19.05	23.8	28.6	34.9	41.3	50.8	H8/h8
<i>I</i>		5	5	5	6	8	8	8	8	
<i>J</i>	M 10	M 10	M 10	M 12	M 16	M 18	M 22	M 24	M 30	
<i>K</i>	14	17	19	22	25	32	37	42	50	

* *F*₁ for type A₁, *F*₂ for type A₂.

(1) 0.1 mm for Nos. 3 to 11 } buttons and } Tolerance of position (radial deviation with
0.15 mm for Nos. 15 to 28 } fixing holes } respect to the theoretical position)

(2) — 0.025 mm for Nos. 5 to 28

(3) + 0.023 mm for No. 28
0

NOTE.—General tolerance for untoleranced dimensions: ± 0.4 mm.

3.1.2 Sizes in inches

Type A₁: Two bolt circles with radius *C* and *D*Type A₂: Only the outer bolt circle with radius *C*(Type A₂ for Nos. 3 and 4; types A₁ and A₂ for Nos. 5 to 28)


Dimension \ No.	3	4	5	6	8	11	15	20	28	Tolerances
<i>A</i>	3 5/8	4 1/4	5 1/4	6 1/2	8 1/4	11	15	20 1/2	28 1/2	
<i>B</i>	2.125 0	2.500 5	3.250 5	4.188 0	5.500 75	7.750 75	11.251 0	16.251 0	23.001 0	(3)
<i>C</i>	1.391	1.625	2.062 5	2.625	3.375	4.625	6.500	9.125	12.750	(1) (2)
<i>D</i>			1.218 75	1.625 0	2.187 5	3.250 0	4.875 0	7.250 0	10.437 5	(2)
<i>E</i>	5/8	3/4	7/8	1	1 1/8	1 3/8	1 5/8	1 7/8	2 1/4	
<i>F</i> ₁ *			0.562 5	0.625	0.687 5	0.750	0.812 5	0.875	1.000	(5)
<i>F</i> ₂ *	7/16	7/16	1/2	9/16	5/8	11/16	3/4	13/16	15/16	
<i>H</i>		0.562 5	0.625	0.750	0.937 5	1.125	1.375	1.625	2.000	(4)
<i>I</i>		3/16	3/16	3/16	1/4	5/16	5/16	5/16	5/16	
<i>J</i>	7/16-14 UNC	7/16-14 UNC	7/16-14 UNC	1/2-13 UNC	5/8-11 UNC	3/4-10 UNC	7/8-9 UNC	1-8 UNC	1 1/4-7 UNC	
<i>K</i>	9/16	11/16	3/4	7/8	1 1/16	1 1/4	1 7/16	1 5/8	2	

* *F*₁ for type A₁, *F*₂ for type A₂.

- | | | | | |
|-----|-------|----------------------|----------------|--|
| (1) | 0.003 | in for Nos. 4 to 8 | } buttons | } Tolerance of position (radial deviation
with respect to the theoretical position) |
| | 0.006 | in for Nos. 11 to 28 | | |
| (2) | 0.006 | in for Nos. 3 to 8 | } fixing holes | |
| | 0.008 | in for Nos. 11 to 28 | | |
- (3) + 0.000 25 in for No. 3
+ 0.000 5 in for Nos. 4 to 11
+ 0.001 in for Nos. 15 to 28
- (4) - 0.001 in for buttons
+ 0.002 in for button-holes
- (5) - 0.001 in for Nos. 5 to 28

NOTE.—General tolerance for untoleranced dimensions: $\pm 1/64$ in.

3.2 Face plates - Type A

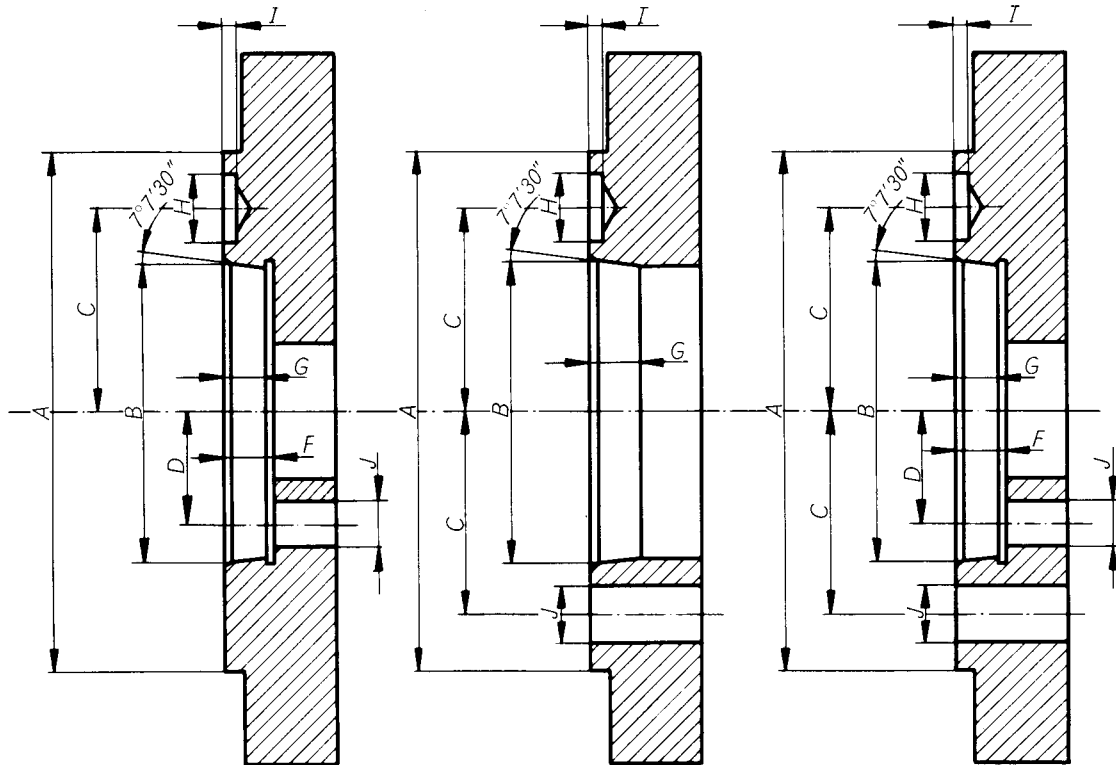

Machining with inner bolt circle (for mounting on spindle nose A₁ by means of its inner bolt circle)

Machining with outer bolt circle (for mounting on spindle nose A₁, or spindle nose A₂ by means of its outer bolt circle)

Machining with two bolt circles (for mounting either on spindle nose A₂, or on spindle nose A₁ by means of inner or outer bolt circle)