



Numerical control of machines — Operational command and data format

Commande numérique des machines — Format de données et de commandes

Technical Report 6132 was drawn up by Technical Committee ISO/TC 97, *Computers and information processing*, and approved by the majority of its members. It was decided to publish the document in the form of a Technical Report because it is not possible, in view of the present state of the art on the subject of numerical control systems, to draw up an International Standard which would be complete and precise and which would not be too restrictive in this rapidly developing field. It is intended as a guideline and will be reviewed and augmented periodically.

Contents

	Page
0 Introduction	2
1 Scope and field of application	2
1.1 Data types	2
1.2 Operational statements	2
1.3 Hardware configuration	2
1.4 Functional categories of commands	4
1.5 Machine programs	4
2 References	5
3 Format, symbols and conventions used in data entry	5
3.1 General information	5
3.2 Format for Operational Statements Commands	6
3.3 Conventions and symbols	6
4 Mode Selector Commands	7
4.1 General information	7
4.2 Mode Selector Commands	7
5 Universal Commands	7
5.1 General information	7
5.2 Universal Commands	7
6 Editor Commands	8
6.1 General information	8
6.2 Editor Commands	8
7 File Handler Commands	8
7.1 General information	8
7.2 Device mnemonics	8
7.3 File Handler Commands	9
8 Machine Control Commands	9
8.1 General information	9
8.2 Machine Control Commands	10
9 Keyboard	10
Annexes	
A Programming examples and command summary	13
B Character sets — LEVEL 1, 2 and 3	18

UDC 681.323 : 621.9-52 : 681.3.06

Ref. No. ISO/TR 6132-1981 (E)

Descriptors : data processing, numerical control, data layout, control procedures, high-level data link control, block formats, symbols.

© International Organization for Standardization, 1981 •

Printed in Switzerland

0 Introduction

This document is intended to provide guidelines for the design of a new set of command data for numerical control of machines. This new set is needed because of the rapid and widespread development of new techniques and new systems which may be termed "Advanced Systems". It is highly desirable that uncontrolled development of incompatible systems and simultaneous creations of different MAN-MACHINE LANGUAGES be avoided.

In order to take advantage of the flexibility and capability of current and future NC systems, it is necessary to be able to enter initialization and parameter data in addition to that included in the machine program formats specified in ISO 2539.

This Technical Report is intended to serve as a guide in the co-ordination of system design to promote uniformity in part programming and operating techniques for inputting extended machine set-up, initialization and/or operational parameter data. This format can be used either at a panel on the machine control equipment or at a central unit when DNC is used. The desirability of establishing uniformity and a degree of interchangeability of recorded input data for numerical control systems has long been recognized by equipment builders as well as users. Further, with extensive use of general purpose alphanumeric keyboards for entry of data by the operator, it is desirable to promote uniformity of manual entry formats between equipment to compensate for the lack of functional labelling of the system operator input devices.

In the past, this type of data was minimal and special entry devices such as functional pushbutton switches and digital entry switches (thumbwheel switches, for example) were used. The amount and variety of this type of data required make it desirable from economic and operational standpoints to enter this data via machine program input media such as punched tape or general purpose alphanumeric keyboards on the system.

1 Scope and field of application

1.1 Data types

The numerical control systems addressed by this Technical Report use a combination of two types of data :

- 1) Machine program data — Data formatted in accordance with ISO 2539 and coded in accordance with ISO 840.
- 2) Operational statements — Machine set-up, initialization and/or operational parameter data formatted in accordance with this Technical Report and coded in accordance with ISO 646.

Character subset :

0-8 0-9 0-10 0-13

characters of column 2 except 2-7

characters of column 3 except 3-11 and 3-15

characters of column 4 except 4-0

characters of column 5

characters 7-12 and 7-15

1.2 Operational statements

It is not expected that all NC systems will embody all the features and capabilities for which operational statements have been defined in this Technical Report. When an NC system has the capability to enter operational statements, the mnemonics and formats defined in this Technical Report shall be used. It is not intended that the functions defined herein shall limit the capabilities of NC systems; additional functions and operational statements may be defined and implemented by the control builder as required. It is also expected that in some instances, a control builder may, at his discretion, implement one or more of the functions defined herein exclusively with pushbutton switches or other conventional operator controls. If these functions are labelled in an abbreviated or mnemonic fashion, the mnemonics defined in this Technical Report shall be used.

1.3 Hardware configuration

This Technical Report deals with numerical control systems which may assume any of a wide variety of hardware configurations according to the purpose and capabilities required of the system. Figure 1 shows a numerical control system containing several types of

peripheral hardware. The primary concern of this Technical Report is the form of the data prepared by the part programmer or introduced by the operator into the numerical control system through one or more of these devices. In general, these data can be either "machine program data" or "operational statements". Binary data interchange in formats not conforming to this Technical Report may be utilized within or among various devices, at the convenience of the control builder, whenever such interchange is transparent to the user.

Figure 1 suggests some of the possible types of peripheral equipment that may be used with a numerical control system; it is not the intent of this Technical Report to specify or to limit the types of peripherals used in a given system. Other standards exist to define some of the physical interfaces implied by figure 1.

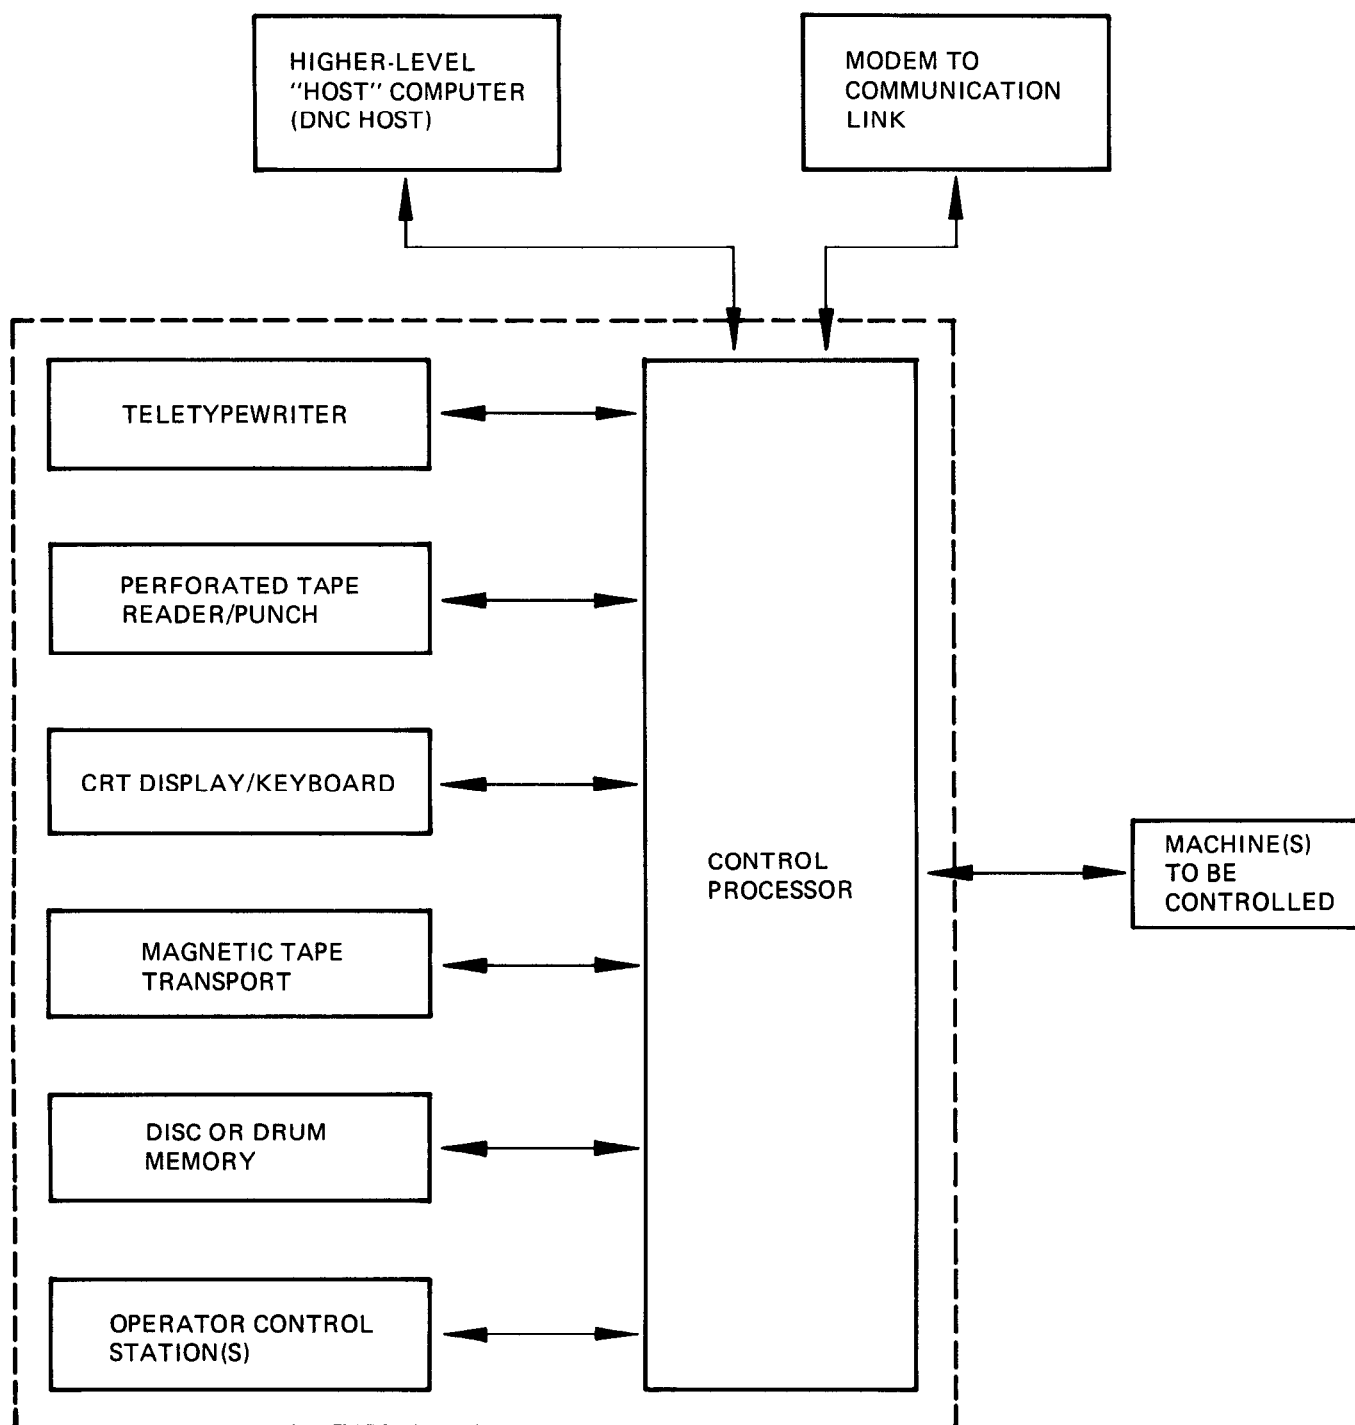


Figure 1 — Example of generalized hardware configuration of a numerical control system

1.4 Functional categories of commands

To illustrate the implementation of a system having a broad range of commands and with maximum utilization of an alphanumeric keyboard for command entry, a system having a structure organization according to figure 2 has been used.

Figure 2 shows several categories of commands that may be implemented. It is not the intent of this Technical Report to specifically require or to limit the commands to those shown in figure 2; the extent of the capabilities of any given numerical control system will depend upon the use to which the system is put. In some systems, diagnostic capabilities, management information system facilities and other specialized functions or categories might be provided in addition to those shown in figure 2.

A feature of the organization shown in figure 2 is the existence of a Mode Selector level in the system structure. An operator communicating with a numerical control system having this structure can gain access to any of the subordinate command categories from the Mode Selector level. Once he has entered the appropriate sub-level, he can perform any desired operation for which mnemonic commands have been defined in that command category. When he has completed his task, he can switch from the sub-level back to the Mode Selector level and, from there, enter any other desired sub-level. The primary function of the Mode Selector level in this illustration is to allow the operator to choose the desired type of system operation by means of keyboard commands. The control builder may wish to perform this mode selection in other ways, such as with a selector switch.

Note that the operations listed for each sub-level can involve the use of commands, initiated by the operator, to perform some function. Normally, in the course of issuing commands to the system, there would also be responses of the system back to the operator. These commands and responses would be transacted by means of a System Console which typically includes a data entry device and a display device and which may be a CRT/Keyboard terminal, a teletypewriter or other appropriate device.

Also shown in figure 2 is a category for Universal Commands. These commands are valid in all command modes including the Mode Selector level.

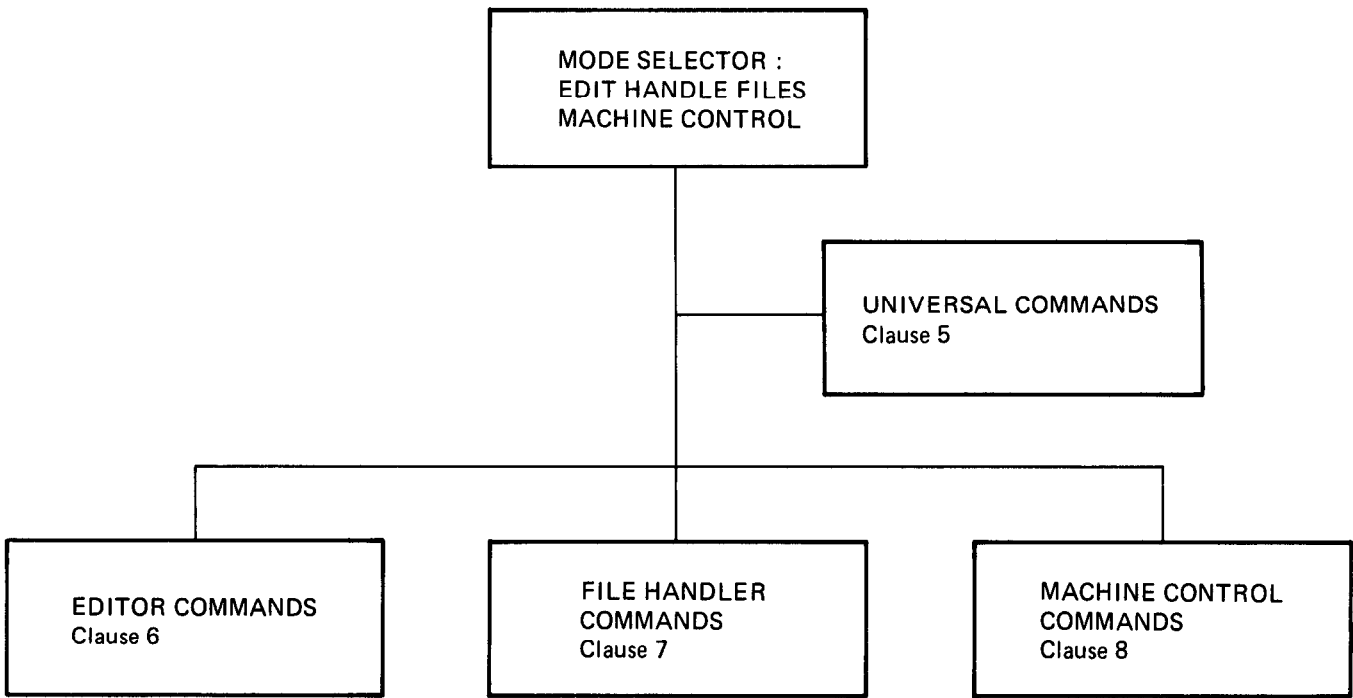


Figure 2 — Generalized functional command categories of a numerical control system

1.5 Machine programs

To facilitate the automatic operation of machines running under numerical control, it is desirable to provide the capability of combining some of the commands listed under the Machine Control sub-level with machine program data rather than restricting those commands to entry solely through the System Console.

In order to accomplish this, a structure for machine programs is established by this Technical Report, which can embody both "machine program data" and "operational statements". To allow the numerical control system to distinguish between the two types of data, Control Out and Control In codes are defined in accordance with ISO 2539 as part of the machine program structure.

Figure 3 shows a conceptualization of this structure. Note that a conventional machine program consisting of machine program data has embedded within it a sequence of operational statements set-up data. The open parenthesis, "(", is used to switch from the machine program data format to the operational statements format. The close parenthesis, ")", is used to return to machine program data format.

These format changes can occur throughout the machine program. It is recommended that sequence numbers as defined in ISO 2539 be used as line numbers. Sequence numbers should be assigned in ascending order.

It is strongly recommended that only persons with the necessary authority should be allowed to modify programs. When a switch is used for mode selection, operation should be by a key. When the mode is selected by push button or keyboard, passwords should be used with prompting from the system.

Control Out (		Control In)
MACHINE PROGRAM DATA	OPERATIONAL STATEMENTS DATA	MACHINE PROGRAM DATA
Classical machine program data per ISO 2539 and ISO 840	Set-up data or operator messages per this Technical Report and ISO 646	Classical machine program data per ISO 2539 and ISO 840
	N42 X12487 Z76543 M01 NL	MACHINE PROGRAM DATA
	N43 X34567 Z54321 NL	
	(MSL, 2*MSG, MACHINE NO 2 SELECTED)	OPERATIONAL STATEMENTS DATA
	N44 G01 X11268 NL	MACHINE PROGRAM DATA
	N45 X25148 Y64318 F515 NL	

Figure 3 — Typical machine program data structure embodying both machine program and operational statements data

2 References

ISO 646, 7-bit coded character set for information processing interchange.

ISO 840, Numerical control of machines — 7-bit coded character set.

ISO 2126, Office machines — Basic arrangement for the alphanumeric section of keyboards operated with both hands.

ISO 2539, Numerical control of machines — Punched variable block format for contouring and contouring/positioning.

ISO 3244, Office machines and data processing equipment — Principles governing the positioning of control keys and keyboards.

ISO 4342, Numerical control processor input — Basic part program reference language.¹⁾

ISO 6983/1, Numerical control of machines — Word address program format and definition — Part 1 : Data format for positioning and contouring control systems.¹⁾

ISO 6983/2, Numerical control of machines — Word address program format and definition — Part 2 : Coding of preparatory functions, G, and miscellaneous functions, M.¹⁾

3 Format, symbols and conventions used in data entry

3.1 General information

In the course of entering mnemonic commands from a keyboard, striking the wrong key may give rise to entry errors. The control builder should provide appropriate means to allow correction of and/or recovery from keyboard entry errors. Typically, functions would be defined to delete the previous character entered from the keyboard or to ignore the entire command just typed.

1) At present at the stage of draft.

Interactive “prompting” is recommended as an approach to operator/machine communication. Although not required by the commands defined by this Technical Report, such interactive response from the NC system assist in removing a burden from the operator and in reducing the probability of command errors. The control builder may elect, at his discretion, to lock out the keyboard of the System Console and/or to display error messages to the operator if commands are issued incorrectly or if, for any reason, the system is not ready to accept commands. The control builder may also elect to require the operator to enter a “password” to allow him access to certain sensitive commands.

It is also suggested that the control builder provide suitable interlocks for the machine motion system to inhibit motion (which could result unintentionally from an erroneous command) until the operator makes an active effort to initiate it (by pressing a Start button, for example).

3.2 Format for Operational Statements Commands

Operational Statements Commands shall be presented as operational statements whether entered manually or by other media. Each operational statement shall consist of a function mnemonic code followed, where appropriate, by one or more arguments qualifying the command.

Command function mnemonics are structured uniformly from three characters. The first and second characters will be alphabetic characters. The third will be an alphabetic or numeric character. Mnemonics beginning with the character U are permanently reserved for use by control builders and users.

Arguments contained within the operational statement shall be of such length and content as appropriate to the commands defined in the following sub-clauses. A word address format similar to that of ISO 2539 data is preferred in the presentation of arguments.

A delimiter character shall be used to separate the function mnemonic from argument(s). Additional delimiters may be required to separate arguments from one another or operational statements from each other.

3.3 Conventions and symbols

The operator initiates system responses to a command by entering the command and pressing a key, meaning “enter the command into the control system”. In this Technical Report, the symbol ␣ will be used to represent pressing the enter-key.

In the text that follows, certain command arguments are printed in italic. This convention is used to mean that the italicized element is variable and will be replaced (by the programmer or operator) by a specific entry according to the desired effect.

Symbol	Usage	Example
␣	Represents pressing a key meaning “enter the command into the control system”, causing termination of the command and initiation of the commanded function.	FIL ␣
, (comma)	The comma is a delimiter which separates the command mnemonic from the argument which follows it and, when necessary, separates successive arguments of a command.	MIR, XIYO ␣
<i>n, m</i>	Arguments representing line numbers within a file being edited, taking “lines” to be text separated by NEW LINE (line feed) code. <i>n</i> is the first line and <i>m</i> is the last line in the direction of normal program execution.	DEL, <i>n, m</i> ␣
(2/2)''	A text delimiter required when using certain Editor Commands. No character need be printed.	
((open parenthesis)	Control Out ISO 2539. Used, when constructing machine programs employing both machine program and operational statements data, as the code to enter the operational statements data mode.	See figure 3
) (close parenthesis)	Control In ISO 2539. Code to return to the machine program data mode.	See figure 3
* (asterisk)	Delimiter to separate successive Commands within the operational statements data mode of machine programs employing both machine program and operational statements data.	See figure 3
NL	Represents the End of Block character (new line) for ISO 2539/840 programs.	See figure 3
< (less than)	Used in the operational statements mode to denote the beginning of a nested command.	See 7.3
> (greater than)	Used in the operational statements data mode to denote the end of a nested command.	See 7.3
/ (slash)	Delimiter used with File Handler Commands to separate <i>filenames</i> from <i>devicename</i> .	See 6.2

4 Mode selector commands

4.1 General information

The Mode Selector level is a portion of command structure that allows the operator to select the type of System operation. Its utilization is not compulsory and not functionally necessary, but is given as an option for organizing the operator procedure.

If utilized, it shall be in accordance with this Technical Report.

The Mode Selection, if any, may be performed :

- a) by keyboard (Mode Selector commands table 1);
- b) by separate push buttons;
- c) by a switch.

The status of the System (Mode Selector level) should be clearly indicated to the operator.

4.2 Mode Selector Commands

Table 1 lists the mnemonic code, the format and the function of each Mode Selector Command. These commands correspond to the three command categories (operation modes) illustrated in this Technical Report.

Note that in several cases further interaction between the system and operator may be required to qualify the basic command.

Some NC systems may be configured with some or all of these sub-levels or additional sub-levels, or both, as required by the system. If additional sub-levels are provided by the control builder, appropriate commands shall be defined to access them.

5 Universal commands

5.1 General information

Universal commands are intended for general system control rather than for implementation of specific operational functions. The universal commands must be effective without selection of a particular mode.

5.2 Universal Commands

Table 2 lists the mnemonic code, the format and the function of each Universal Command.

Table 1 — Mode Selector Commands

Mne-monic	Format	Function
EDT	EDT, <i>oldfile</i> , <i>newfile</i> ␣	Conditions system to enter Editor sub-level. <i>Oldfile</i> is altered if <i>newfile</i> is not defined
FIL	FIL ␣	Conditions system to enter File Handler sub-level
MCH	MCH, <i>machine-name</i> ␣	Conditions system to enter Machine Control sub-level. Specification of <i>machinename</i> optional
END	END	End of all the modes

Table 2 — Universal Commands

Mne-monic	Format	Function
DIS	DIS, <i>arguments</i> argument <i>m</i> , device name argument <i>n</i> . . . ␣	DISPLAY on the device selected the parameters specified by the <i>arguments</i> . A list of arguments and the resulting displayed parameters, shall be specified by the control builder