



INTERNATIONAL TELECOMMUNICATION UNION

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

H.248.12

(07/2001)

SERIES H: AUDIOVISUAL AND MULTIMEDIA SYSTEMS

Infrastructure of audiovisual services – Communication
procedures

Gateway control protocol: H.248.1 packages for H.323 and H.324 interworking

ITU-T Recommendation H.248.12

**ITU-T H-SERIES RECOMMENDATIONS
AUDIOVISUAL AND MULTIMEDIA SYSTEMS**

CHARACTERISTICS OF VISUAL TELEPHONE SYSTEMS	H.100–H.199
INFRASTRUCTURE OF AUDIOVISUAL SERVICES	
General	H.200–H.219
Transmission multiplexing and synchronization	H.220–H.229
Systems aspects	H.230–H.239
Communication procedures	H.240–H.259
Coding of moving video	H.260–H.279
Related systems aspects	H.280–H.299
SYSTEMS AND TERMINAL EQUIPMENT FOR AUDIOVISUAL SERVICES	H.300–H.399
SUPPLEMENTARY SERVICES FOR MULTIMEDIA	H.450–H.499
MOBILITY AND COLLABORATION PROCEDURES	
Overview of Mobility and Collaboration, definitions, protocols and procedures	H.500–H.509
Mobility for H-Series multimedia systems and services	H.510–H.519
Mobile multimedia collaboration applications and services	H.520–H.529
Security for mobile multimedia systems and services	H.530–H.539
Security for mobile multimedia collaboration applications and services	H.540–H.549
Mobility interworking procedures	H.550–H.559
Mobile multimedia collaboration inter-working procedures	H.560–H.569

For further details, please refer to the list of ITU-T Recommendations.

ITU-T Recommendation H.248.12

Gateway control protocol: H.248.1 packages for H.323 and H.324 interworking

Summary

This Recommendation defines several H.248.1 packages that are intended for Media Gateways designed to support interworking between H.323 terminals and H.324 terminals. More specifically, this Recommendation contains: package "h324" for creating terminations supporting H.324, package "h245" for creating terminations supporting H.245 channels for H.324 calls, package "h323bc" for creating terminations supporting H.245 channels for H.323 calls, package "h245com" for the communication of H.245 commands between a MGC and MG, and package "h245ind" for the communication of H.245 indications.

NOTE – This Recommendation has been renumbered. It was formerly known as ITU-T Rec. H.248, Annex M4.

Source

ITU-T Recommendation H.248.12 was prepared by ITU-T Study Group 16 (2001-2004) and approved under the WTSA Resolution 1 procedure on 29 July 2001.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications. The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementors are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database.

© ITU 2002

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

CONTENTS

	Page
1 Introduction.....	1
2 Scope.....	1
3 References.....	1
3.1 Normative references.....	1
3.2 Informative reference	2
4 H324 package	2
4.1 Properties	3
4.1.1 Communication mode	3
4.1.2 Highest Multiplexing Level.....	3
4.1.3 Demultiplex	4
4.1.4 Remote H.223 capability	4
4.1.5 Incoming Multiplex Table	5
4.1.6 Outgoing Multiplex Table	5
4.2 Events	5
4.3 Signals	6
4.4 Statistics.....	6
4.4.1 MUXPDU sent	6
4.4.2 MUXPDU received	6
4.4.3 MUXPDU error	6
4.5 Procedures	6
5 H245 Package	7
5.1 Properties	7
5.1.1 H.245 channel state.....	7
5.1.2 Terminal Type	7
5.2 Events	8
5.2.1 H245 Message	8
5.2.2 H.245 Channel Closed.....	11
5.3 Signals	11
5.4 Statistics.....	11
5.5 Procedures	11
6 H323 Bearer Control Package	11
6.1 Properties.....	11
6.1.1 Fast Connect	11
6.1.2 H.245 Message Encapsulation.....	12
6.2 Events	12

		Page
6.3	Signals	12
6.4	Statistics.....	12
6.5	Procedures	12
7	H.245 Command Package	13
7.1	Properties	13
7.1.1	Incoming MiscellaneousCommand	13
7.1.2	Outgoing Miscellaneous Command	14
7.1.3	Incoming H223MultiplexReconfiguration Command.....	14
7.1.4	Outgoing H223MultiplexReconfiguration Command.....	14
7.2	Events	15
7.3	Signals	15
7.4	Statistics.....	15
7.5	Procedures	15
8	H.245 Indication package	15
8.1	Properties	15
8.1.1	Incoming MiscellaneousIndication.....	15
8.1.2	Outgoing MiscellaneousIndication.....	16
8.2	Events	16
8.3	Signals	16
8.4	Statistics.....	16
8.5	Procedures	16
9	Call flows.....	16
9.1	H.323-Annex C/H.324 interworking with H.245 in MG	16
9.1.1	Calls with origination by the Annex C/H.324 side.....	16
9.1.2	Calls with origination by the H.323 side	18
9.2	H.323-Annex C/H.324 interworking with H.245 in MGC.....	19
9.3	Tunnelling of Annex C/H.324 bitstream	21

ITU-T Recommendation H.248.12

Gateway control protocol: H.248.1 packages for H.323 and H.324 interworking

1 Introduction

This Recommendation gathers packages for H.245, H.245 parameters specific to H-series audiovisual terminals, and Annex C/H.324 terminals for use with the H.248.1 gateway control protocol. The packages in this Recommendation are in conformance with clause 12/H.248.1 package definition guidelines.

2 Scope

This Recommendation describes packages for the H.248.1 gateway control protocol related to interworking of H.323 and H.324 terminals, as follows:

- Package "h324" for termination of H.324 bitstream on MGs.
- Package "h245" for termination of H.245 messages on MGs.
- Package "h323bc" for H.245 parameters specific to H.323.
- Package "h245com" for providing properties that allow the MGC to indicate to the MG that the MGC has sent or received an H.245 command.
- Package "h245ind" for providing properties that allow the MGC to indicate to the MG that the MGC has sent or received an H.245 indication.

With the terminations implementing "h324", "h245com" and "h245ind" packages, the decomposed gateway may support H.324 communication with the H.245 control function in the MGC. In the H.324 and H.323 interworking scenario with this decomposed gateway, H.245 control messages are terminated in the MGC (a backhaul is used between the MG and the MGC to transport H.245 messages between the MG and the MGC, on the H.324 side). The terminations for media on both H.324 and H.323 sides are managed by the MGC.

With the terminations implementing "h324" and "h245" packages, the decomposed gateway may support H.324 communication with H.245 control in the MG. In the H.324 and H.323 interworking scenario with this decomposed gateway, H.245 control messages from the H.324 side and the H.323 side are terminated in the "h245" termination and in the "h323bc" termination respectively, and are processed in the MG. The MG manages the logical channels for media.

3 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published.

3.1 Normative references

- ITU-T Recommendation H.223 (2001), *Multiplexing protocol for low bit rate multimedia communication*.
- ITU-T Recommendation H.245 (2001), *Control protocol for multimedia communication*.

- ITU-T Recommendation H.323 (2000), *Packet-based multimedia communications systems*.
- ITU-T Recommendation H.324 (2002), *Terminal for low bit-rate multimedia communication*.
- ITU-T Recommendation V.8 (2000), *Procedures for starting sessions of data transmission over the public switched telephone network*.
- ITU-T Recommendation V.8 bis (2000), *Procedures for the identification and selection of common modes of operation between data circuit-terminating equipments (DCEs) and between data terminal equipments (DTEs) over the public switched telephone network and on leased point-to-point telephone-type circuits*.
- ITU-T Recommendation V.34 (1998), *A modem operating at data signalling rates of up to 33 600 bit/s for use on the general switched telephone network and on leased point-to-point 2-wire telephone-type circuits*.
- ITU-T Recommendation V.42 (1996), *Error-correcting procedures for DCEs using asynchronous-to-synchronous conversion*.
- ITU-T Recommendation V.42 bis (1990), *Data compression procedures for data circuit-terminating equipment (DCE) using error correction procedures*.
- ITU-T Recommendation V.140 (1998), *Procedures for establishing communication between two multiprotocol audiovisual terminals using digital channels at a multiple of 64 or 56 kbit/s*.
- ITU-T Recommendation X.691 (1997), *Information technology – ASN.1 encoding rules: Specification of Packed Encoding Rules (PER)*.

3.2 Informative reference

- IETF RFC 2960 (2000), *Stream Control Transmission Protocol*.

4 H324 package

Package Name: H.324

PackageID: h324, (0x002c)

Version: 1

Extends: None

Description:

This package is defined to support terminations for calls using ITU-T Rec. H.324. The transport mechanism or bearer channel will be different for each environment where the package is used.

Figure 1 shows the functional view of a H.324 multimedia call and the MGC control points defined in the H.324 package. In ITU-T Rec. H.324, there are three communication modes defined according to the underlying network: a PSTN mode defined in ITU-T Rec. H.324 main body (H.324P), a mobile network mode defined in Annex C/H.324 (H.324M), and an ISDN mode defined in Annex D/H.324 (H.324I). One of these communication modes shall be selected when the termination implementing the H.324 package is invoked by the MGC.

In version 1 of the H.324 package, only the functionalities required of the H.324M mode are defined. The functionalities for H.324P and H.324I are FFS, and will be defined in version 2, or later.

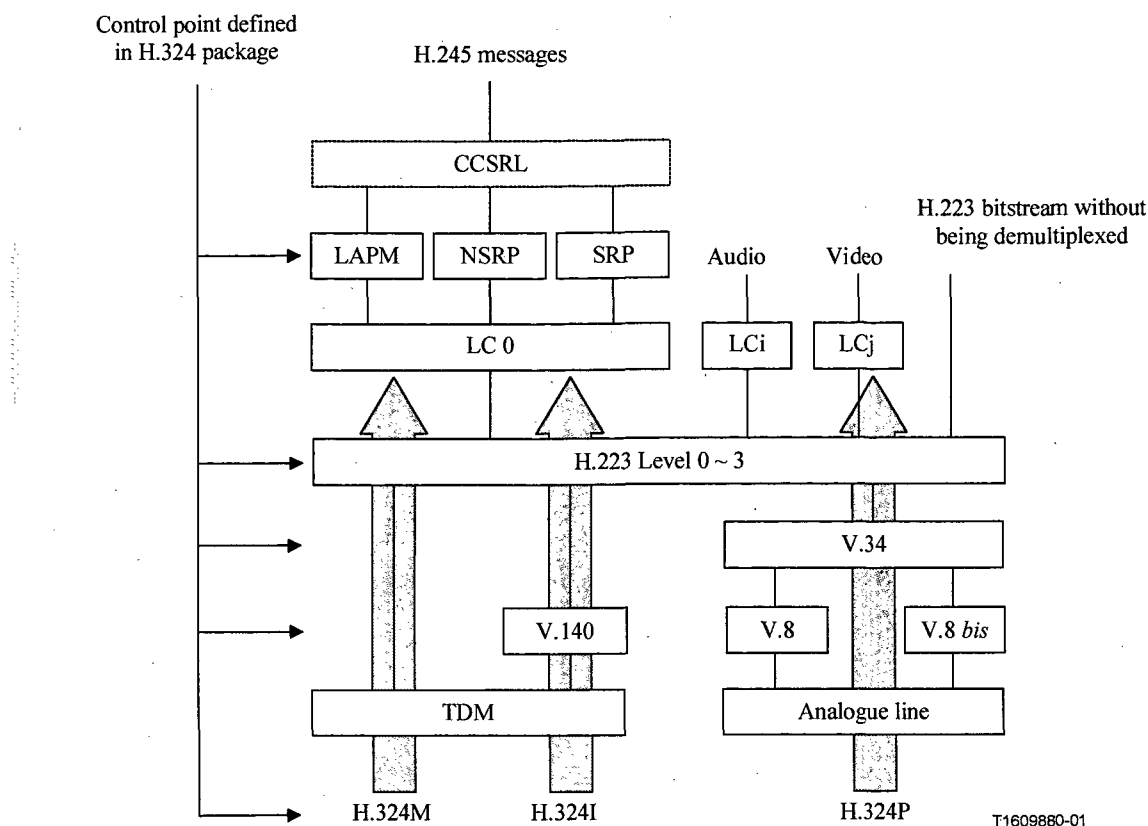


Figure 1/H.248.12 – Control point defined in H.324 package

4.1 Properties

4.1.1 Communication mode

Property Name: Communication mode

PropertyID: cmod (0x0001)

Type: Enumeration

Possible values:

- H324P (0x0001) H324 operating in the base PSTN mode using a V-series modem
- H324M (0x0002) Annex C/H.324 (Mobile)
- H324I (0x0003) Annex D/H.324 (ISDN)

Defined in: TerminationState

Characteristics: Read/Write

Description:

This property indicates the communication mode to be followed by the termination.

4.1.2 Highest Multiplexing Level

Property Name: Highest Multiplexing level

PropertyID: muxlv (0x0002)

Type: Enumeration