

Supplement **ITU-T H Suppl. 21 (01/2025)**

SERIES H: Audiovisual and multimedia systems

Supplements to ITU-T H-series Recommendations

Film grain synthesis technology for video applications

ITU-T H-SERIES RECOMMENDATIONS

Audiovisual and multimedia systems

CHARACTERISTICS OF VISUAL TELEPHONE SYSTEMS	H.100-H.199
INFRASTRUCTURE OF AUDIOVISUAL SERVICES	H.200-H.499
General	H.200-H.219
Transmission multiplexing and synchronization	H.220-H.229
Systems aspects	H.230-H.239
Communication procedures	H.240-H.259
Coding of moving video	H.260-H.279
Related systems aspects	H.280-H.299
Systems and terminal equipment for audiovisual services	H.300-H.349
Directory services architecture for audiovisual and multimedia services	H.350-H.359
Quality of service architecture for audiovisual and multimedia services	H.360-H.369
Telepresence, immersive environments, virtual and extended reality	H.420-H.439
Supplementary services for multimedia	H.450-H.499
MOBILITY AND COLLABORATION PROCEDURES	H.500-H.549
Overview of Mobility and Collaboration, definitions, protocols and procedures	H.500-H.509
Mobility for H-Series multimedia systems and services	H.510-H.519
Mobile multimedia collaboration applications and services	H.520-H.529
Security for mobile multimedia systems and services	H.530-H.539
Security for mobile multimedia collaboration applications and services	H.540-H.549
VEHICULAR GATEWAYS AND INTELLIGENT TRANSPORTATION SYSTEMS (ITS)	H.550-H.599
Architecture for vehicular gateways	H.550-H.559
Vehicular gateway interfaces	H.560-H.569
BROADBAND, TRIPLE-PLAY AND ADVANCED MULTIMEDIA SERVICES	H.600-H.699
Broadband multimedia services over VDSL	H.610-H.619
Advanced multimedia services and applications	H.620-H.629
Content delivery and ubiquitous sensor network applications	H.640-H.649
IPTV MULTIMEDIA SERVICES AND APPLICATIONS FOR IPTV	H.700-H.799
General aspects	H.700-H.719
IPTV terminal devices	H.720-H.729
IPTV middleware	H.730-H.739
IPTV application event handling	H.740-H.749
IPTV metadata	H.750-H.759
IPTV multimedia application frameworks	H.760-H.769
IPTV service discovery up to consumption	H.770-H.779
Digital Signage	H.780-H.789
E-HEALTH MULTIMEDIA SYSTEMS, SERVICES AND APPLICATIONS	H.800-H.899
Personal health systems	H.810-H.819
Interoperability compliance testing of personal health systems (HRN, PAN, LAN, TAN and WAN)	H.820-H.859
Multimedia e-health data exchange services	H.860-H.869
Safe listening	H.870-H.879

For further details, please refer to the list of ITU-T Recommendations.

Supplement 21 to ITU-T H-series Recommendations

Film grain synthesis technology for video applications

Summary

Supplement 21 to ITU-T H-series Recommendations provides information on the use of film grain synthesis technology for video applications. Film grain synthesis technology offers subjective quality benefits for certain video applications and can effectively improve video compression. The use of such technology can involve pre-processing to reduce film grain and sensor noise present in a video or image signal prior to compression. Metadata can then be conveyed to a decoder and used to synthesize noise with similar characteristics, as in the original content as a post-processing stage that follows the compression decoding process. This metadata may be signalled using appropriate mechanisms, such as the supplemental enhancement information messages that are supported by several video coding standards.

This Supplement provides a referenceable overview of the end-to-end processing steps for film grain and sensor noise removal, estimation, parameterization, synthesis, and blending for consumer distribution applications. The Supplement includes examples of encoder-side and post-decoding processing steps for grain blending with some of the currently defined technologies.

This H-series Supplement was developed collaboratively with ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*, and corresponds with ISO/IEC TR 23002-9:2024 as technically aligned twin text.

History*

Edition	Recommendation	Approval	Study Group	Unique ID
1.0	ITU-T H Suppl. 21	2025-01-24	21	11.1002/1000/16269

* To access the Recommendation, type the URL <https://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, and information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

This is an informative ITU-T publication. Mandatory provisions, such as those found in ITU-T Recommendations, are outside the scope of this publication. This publication should only be referenced bibliographically in ITU-T Recommendations.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this publication may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the standards development process.

As of the date of approval of this publication, ITU had not received notice of intellectual property, protected by patents/software copyrights, which may be required to implement this publication. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the appropriate ITU-T databases available via the ITU-T website at <https://www.itu.int/ITU-T/ipr/>.

© ITU 2025

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

		Page
1	Scope	1
2	References.....	1
3	Definitions	3
4	Abbreviations and acronyms	3
5	Conventions	3
5.1	General	3
5.2	Arithmetic operators.....	4
5.3	Bit-wise operators.....	4
5.4	Assignment operators	4
5.5	Relational, logical and other operators	5
5.6	Range notation.....	5
5.7	Mathematical functions	5
5.8	Order of operations.....	5
6	Overview of film grain technologies	6
6.1	General	6
6.2	Film grain technical characteristics	7
6.3	Film grain modelling	9
6.4	Film grain use cases and applications	9
6.5	Film grain workflow	10
7	Film grain synthesis.....	11
7.1	General	11
7.2	General description of film grain synthesis.....	12
7.3	Examples of film grain synthesis using the frequency filtering model	19
7.4	Examples of film grain synthesis using the autoregressive model.....	22
7.5	Example of film grain synthesis supporting both the frequency filtering and autoregressive models.....	26
8	Film grain analysis.....	27
8.1	General	27
8.2	Denoising and image analysis	28
8.3	Determination of grain scaling function.....	29
8.4	Determination of cut-off frequencies for frequency filtering model.....	34
8.5	Determination of autoregressive model coefficients	35
9	Film grain metadata	36
9.1	General	36
9.2	Film grain characteristics SEI message	36
9.3	AFGS1 metadata	38
	Appendix I – Example implementations of the derivation of x/y offset.....	41
I.1	Preserving uniform distribution when offset range is not a power of two	41

	Page
I.2 Considerations on left of right shifting LFSR	41
I.3 Specific considerations when offset range is a power of two	42
Appendix II – Example implementations of film grain synthesis technologies	43
II.1 FGC SEI message insertion and manipulation.....	43
II.2 Film grain synthesis example implementations	45
II.3 Film grain analysis example implementations	46

Introduction

Film grain synthesis technology offers subjective quality benefits for certain video applications and can effectively improve video compression. The use of such technology can involve pre-processing to reduce film grain and sensor noise present in a video or image signal prior to compression. Metadata can then be conveyed to a decoder and used to synthesize noise with similar characteristics, as in the original content as a post-processing stage that follows the compression decoding process. This metadata can be signalled using appropriate mechanisms, such as the supplemental enhancement information messages that are supported by several video coding standards.

This supplement provides a referenceable overview of the end-to-end processing steps for film grain and sensor noise removal, estimation, parameterization, synthesis, and blending for consumer distribution applications. The supplement includes examples of encoder-side and post-decoding processing steps for grain blending for some of the currently defined technologies.

Supplement 21 to ITU-T H-series Recommendations

Film grain synthesis technology for video applications

1 Scope

This Supplement provides a description of the film grain synthesis technology in video applications, including for use with [ITU-T H.264], [ITU-T H.265] and [ITU-T H.266].

2 References

- [[ITU-T H.264](#)] Recommendation ITU-T H.264 (V15) (2024) | ISO/IEC 14496-10:2024, *Advanced video coding for generic audiovisual services*.
- [[ITU-T H.265](#)] Recommendation ITU-T H.265 (V10) (2024) | ISO/IEC 23008-2:2024, *High efficiency video coding*.
- [[ITU-T H.265.2](#)] Recommendation ITU-T H.265.2 (V3) (2016), *Reference software for ITU-T H.265 high efficiency video coding*.
- [[ITU-T H.266](#)] Recommendation ITU-T H.266 (V3) (2023) | ISO/IEC 23090-3:2023, *Versatile video coding*.
- [[ITU-T H.266.2](#)] Recommendation ITU-T H.266.2 (V2) (2024) | ISO/IEC 23090-16:2024, *Reference software for ITU-T H.266 versatile video coding*.
- [[ITU-T H.274](#)] Recommendation ITU-T H.274 (V3) (2023), *Versatile supplemental enhancement information messages for coded video bitstreams*.
- [Allen-ManPho] E. Allen, and S. Triantaphillidou, *The Manual of Photography*. CRC Press, 2012.
- [Ameur-fgrs] Z. Ameur, W. Hamidouche, E. François, M. Radosavljević, D. Menard and C.-H. Demarty (2023), *Deep-Based Film Grain Removal and Synthesis*, IEEE Transactions on Image Processing, 32, 5046–5059. doi: 10.1109/TIP.2023.3308726
- [aomedia-AFGS1] Alliance for Open Media (2024), *AOMedia film grain synthesis specification version 1.0.0 (AFGS1)*, January <https://aomediacodec.github.io/afgs1-spec/>
- [aomedia-AV1] Alliance for Open Media (2019), *AV1 bitstream & decoding process specification version 1.0.0 with errata*, January, <https://aomediacodec.github.io/av1-spec/av1-spec.pdf> [Accessed: April 2024]
- [aomedia-libaom] Alliance for Open Media, *libaom – AV1 reference software version 3.8.1*, <https://aomedia.googlesource.com/aom/+refs/tags/v3.8.1> [Accessed: April 2024]
- [Brooks-denoising] T. Brooks, B. Mildenhall, T. Xue, J. Chen, D. Sharlet, J. T. Barron (2019), *Unprocessing images for learned raw denoising*, Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. doi: 10.1109/CVPR.2019.01129
- [Dabov-denoising3D] K. Dabov, A. Foi, V. Katkovnik and K. Egiazarian (2020), *Image denoising by sparse 3-D transform-domain collaborative filtering*, IEEE Transactions on Image Processing, 16(8), 2080–2095. doi: 10.1109/TIP.2007.901238

- [Enhorn-pre-filter] J. Enhorn, R. Sjöberg and P. Wennersten (2020), *A temporal pre-filter for video coding based on bilateral filtering*, IEEE International Conference on Image Processing (ICIP), October. doi: 10.1109/ICIP40778.2020.9191359
- [FFmpeg] FFmpeg version 4.2.4-1ubuntu0.1 (f9f95ce) (2020), <https://github.com/FFmpeg/FFmpeg/releases/tag/n4.2.4> [Accessed: April 2024]
- [fgsl] Film Grain Synthesis Library version 9203d4a, Ittiam Systems, December 2023, <https://github.com/ittiam-systems/libfgs/commit/9203d4a1c6c8bea8f11c3770c95c6846a6587906> [Accessed: April 2024]
- [Gomila-JVT-H022] C. Gomila and A. Kobilansky (2003), *SEI message for film grain encoding*, document JVT-H022, 2003.
- [Grois-1113700] D. Grois and A. Giladi (2020), *Perceptual quantization matrices for high dynamic range H.265/MPEG-HEVC video coding*, Proceedings SPIE 11137, Applications of Digital Image Processing XLII, 1113700, SPIE, February. doi: 10.1117/12.2525406
- [Grois-HVS] D. Grois and A. Giladi (2020), *HVS-Based Perceptual Quantization Matrices for HDR HEVC Video Coding for Mobile Devices*, International Broadcasting Convention (IBC), September.
- [Kokaram] A. Kokaram, D. Kelly, H. Denman and A. Crawford (2012), *Measuring noise correlation for improved video denoising*, 19th IEEE International Conference on Image Processing. doi: 10.1109/ICIP.2012.6467081
- [Lebrun-BM3D] M. Lebrun (2012), *An Analysis and Implementation of the BM3D Image Denoising Method*, Image Processing On Line, doi: 10.5201/ipol.2012.l-bm3d. Available at: http://www.ipol.im/pub/art/2012/l-bm3d/article_lr.pdf [Accessed: April 2024]
- [Mäkinen-sparse3D] Y. Mäkinen, et al, *Image and video denoising by sparse 3D transform-domain collaborative filtering*, <https://webpages.tuni.fi/foi/GCF-BM3D/> [Accessed: April 2024]
- [Norkin-AV1] A. Norkin and N. Birkbeck (2018), *Film Grain Synthesis for AV1 Video Codec*, Proceedings of IEEE Data Compression Conference (DCC). doi: 10.1109/DCC.2018.00008
- [Norkin-aomedia] A. Norkin, N. Birkbeck (2022), *Technical report on AOMedia film grain synthesis technology CWG-C050o_v1*, Alliance for Open Media, July, https://aomedia.org/docs/CWG-C051o_TR_AOMedia_film_grain_synthesis_technology_v2.pdf [Accessed: April 2024]
- [SMPTE] SMPTE RDD 5-2006, *Film grain technology specifications for H.264 | MPEG-4 AVC bitstreams*.
- [Tian-deep-learning] C. Tian, L. Fei, W. Zheng, Y. Xu, W. Zuo and C Lin (2020), *Deep learning on image denoising: An overview*, Neural Networks, Elsevier. doi: 10.1016/j.neunet.2020.07.025
- [VFGS] Versatile film grain synthesis (VFGS) version VFGS-2.0 (1ccac19c) (2023), Fraunhofer HHI, <https://vcgit.hhi.fraunhofer.de/jvet-ahg-fgt/vfgs/-/tags/VFGS-2.0> [Accessed: April 2024]

[VFGS-interdigital] Versatile film grain synthesis (VFGS) version v2.0 (cd954ab) (2023), InterDigital,
<https://github.com/InterDigitalInc/VersatileFilmGrain/releases/tag/v2.0>
[Accessed: April 2024]

3 Definitions

For the purposes of this Supplement, the terms and definitions given in [ITU-T H.264], [ITU-TH.265], [ITU-T H.266] and [ITU-T H.274] apply.

4 Abbreviations and acronyms

This Supplement uses the following abbreviations and acronyms:

AFGS1	AOMedia Film Grain Synthesis 1
AVC	Advanced Video Coding
DCT	Discrete Cosine Transform
FGC	Film Grain Characteristics
FGS	Film Grain Synthesis
HD	High Definition
HEVC	High Efficiency Video Coding
HM	HEVC Model
hqdn3d	high quality denoiser 3D
IDCT	Inverse Discrete Cosine Transform
LFSR	Linear Feedback Shift Register
LUT	Look-up Table
MCTF	Motion-Compensated Temporal Filtering
NAL	Network Abstraction Layer
RDD	Registered Disclosure Document
SD	Standard Definition
SEI	Supplemental Enhancement Information
UHD	Ultra-High Definition
VSEI	Versatile Supplemental Enhancement Information
VTM	VVC Test Model
VVC	Versatile Video Coding

5 Conventions

5.1 General

The mathematical operators used in this document are similar to those used in the C programming language. However, the results of integer division and arithmetic shift operations are defined more precisely, and additional operations are defined, such as exponentiation and real-valued division. Numbering and counting conventions generally begin from 0, e.g., "the first" is equivalent to the 0-th, "the second" is equivalent to the 1-th, and so on.

In this Supplement, DCT/IDCT typically refer to the type-II discrete cosine transform (DCT2) and its inverse (IDCT2).

5.2 Arithmetic operators

The following arithmetic operators are defined as follows:

+	Addition
−	Subtraction (as a two-argument operator) or negation (as a unary prefix operator)
*	Multiplication, including matrix multiplication
x^y	Exponentiation. Denotes x to the power of y . In other contexts, such notation is used for superscripting not intended for interpretation as exponentiation.
/	Integer division with truncation of the result towards zero. For example, $7 / 4$ and $(-7) / (-4)$ are truncated to 1 and $(-7) / 4$ and $7 / (-4)$ are truncated to -1 .
÷	Used to denote division in mathematical formulae where no truncation or rounding is intended.
$\frac{x}{y}$	Used to denote division in mathematical formulae where no truncation or rounding is intended.
$\sum_{i=x}^y f(i)$	The summation of $f(i)$ with i taking all integer values from x up to and including y .
$x \% y$	Modulus. Remainder of x divided by y , defined only for integers x and y with $x \geq 0$ and $y > 0$.

5.3 Bit-wise operators

The following bit-wise operators are defined as follows:

&	Bit-wise "and". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
	Bit-wise "or". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
^	Bit-wise "exclusive or". When operating on integer arguments, operates on a two's complement representation of the integer value. When operating on a binary argument that contains fewer bits than another argument, the shorter argument is extended by adding more significant bits equal to 0.
$x \gg y$	Arithmetic right shift of a two's complement integer representation of x by y binary digits. This function is defined only for non-negative integer values of y . Bits shifted into the MSBs as a result of the right shift have a value equal to the MSB of x prior to the shift operation.
$x \ll y$	Arithmetic left shift of a two's complement integer representation of x by y binary digits. This function is defined only for non-negative integer values of y . Bits shifted into the LSBs as a result of the left shift have a value equal to 0.

5.4 Assignment operators

The following assignment operators are defined as follows:

=	Assignment operator
++	Increment, i.e., $x++$ is equivalent to $x = x + 1$; when used in an array index, evaluates to the value of the variable prior to the increment operation.

--	Decrement, i.e., $x--$ is equivalent to $x = x - 1$; when used in an array index, evaluates to the value of the variable prior to the decrement operation.
+=	Increment by amount given, i.e., $x += 3$ is equivalent to $x = x + 3$, and $x += (-3)$ is equivalent to $x = x + (-3)$.
-=	Decrement by amount given, i.e., $x -= 3$ is equivalent to $x = x - 3$, and $x -= (-3)$ is equivalent to $x = x - (-3)$.

5.5 Relational, logical and other operators

The following operators are defined as follows:

==	Equality operator
!=	Not equal to operator
!x	Logical negation "not"
>	Larger than operator
<	Smaller than operator
>=	Larger than or equal to operator
<=	Smaller than or equal to operator
&&	Conditional/logical "and" operator. Performs a logical "and" of its Boolean operators, but only evaluates the second operand if necessary.
	Conditional/logical "or" operator. Performs a logical "or" of its Boolean operators, but only evaluates the second operand if necessary.
a ? b : c	Ternary conditional. If condition a is true, then the result is equal to b; otherwise the result is equal to c.

5.6 Range notation

y..z	range operator/notation. This function is defined only for integer values of y and z. When z is larger than or equal to y, it defines an ordered set of values from y to z in increments of 1. Otherwise, when z is smaller than y, the output of this function is an empty set. If this operator is used within the context of a loop, it specifies that any subsequent operations defined are performed using each element of this set, unless this set is empty.
------	--

5.7 Mathematical functions

The following mathematical functions are defined as follows:

$$\text{Abs}(x) = \begin{cases} x & ; \quad x \geq 0 \\ -x & ; \quad x < 0 \end{cases}$$

Ceil(x) the smallest integer greater than or equal to x.

$$\text{Clip3}(x, y, z) = \begin{cases} x & ; \quad z < x \\ y & ; \quad z > y \\ z & ; \quad \text{otherwise} \end{cases}$$

Floor(x) the smallest integer lower than or equal to x.

$$\text{Min}(x, y) = \begin{cases} x & ; \quad x \leq y \\ y & ; \quad x > y \end{cases}$$

5.8 Order of operations

When order of precedence in an expression is not indicated explicitly by use of parentheses, the following rules apply:

- Operations of a higher precedence are evaluated before any operation of a lower precedence.

- Operations of the same precedence are evaluated sequentially from left to right.

Table 1 specifies the precedence of operations from highest to lowest; a higher position in the table indicates a higher precedence.

NOTE – For those operators that are also used in the C programming language, the order of precedence used in this document is the same as that used in the C programming language.

Table 1 – Operation precedence from highest (at top of table) to lowest (at bottom of table)

operations (with operands x, y, and z)	
"x++", "x--"	
"!x", "-x" (as a unary prefix operator)	
x^y	
"x * y", "x / y", "x ÷ y", " $\frac{x}{y}$ ", "x % y"	
"x + y", "x - y" (as a two-argument operator),	$\sum_{i=x}^y f(i)$
"x << y", "x >> y"	
"x < y", "x <= y", "x > y", "x >= y"	
"x == y", "x != y"	
"x & y"	
"x y"	
"x && y"	
"x y"	
"x ? y : z"	
"x..y"	
"x = y", "x += y", "x -= y"	

6 Overview of film grain technologies

6.1 General

This clause provides an overview of film grain technologies in the context of video/image compression and distribution. It includes historical information on the development of such technologies in clause 6.2, information on some of the use cases and applications in clause 6.3, and a high-level description of film grain modelling in clause 6.3. More details are provided in subsequent clauses as follows:

- Clause 7 describes some of the already defined film grain synthesis technologies, particularly the frequency filtering and autoregressive models.
- Clause 8 provides examples of technologies that can be used for film grain analysis, including techniques for video denoising, edge and complex texture detection, film grain characteristic analysis, and model parameter estimation.
- Clause 9 describes some of the film grain metadata that have already been defined in current image/video coding standards and specifications, and how each metadata element is interpreted, if appropriate, in the context of the frequency filtering and autoregressive models.
- Example implementations of such technologies are then described in Appendix I and Appendix II.

6.2 Film grain technical characteristics

The multimedia distribution industry began using celluloid (analogue) film as the medium for capture, editing and distribution. Content distribution evolved from analogue technology to digital technologies. During this evolution, the attraction to the visual characteristics of analogue film did not fade. Due to its physical nature, analogue film produced a visual experience that was appreciated by many. Film grain is one of the characteristics of analogue film and is considered a primary contributor to the visual appearance of analogue film, commonly referred to as "film look" or "cinematic look". Film grain is a product of the physical characteristics of analogue film. It refers to the spatiotemporal variations in optical density of processed film that resulted from photographically developing the light-exposed silver-halide crystals dispersed in photographic emulsion [Allen-ManPho]. Images are thus formed by exposure and the development of these crystals. In colour images, where the silver is chemically removed after development, dye clouds (like soft, tiny grains) are formed at the sites where the silver crystals have been exposed. Grains are randomly distributed in the resulting image because of the random formation of silver crystals in the original emulsion. The naked eye cannot distinguish individual grains, which are about 2 microns in size, down to about a tenth of that. Instead, the eye resolves groups of grains in an image, which an observer identifies as a grainy look that is commonly called "film grain". This is illustrated in Figure 1. Another example is shown in Figure 2, with a different colour-image formation process called "autochrome". This was one of the first colour image techniques invented by Auguste and Louis Lumière in 1903, where a classical black and white photo emulsion was exposed through a colour filter made of a fine dust of potato starch dyed with different colours.

In general, the higher the image resolution, the higher the likelihood that the film grain will be perceived. Film grain can be clearly noticeable in cinema and high definition (HD) images, but it progressively loses importance in standard definition (SD) images and becomes imperceptible in smaller formats as described in [Gomila-JVT-H022].



a) 4000 dots per inch (2.54 cm)
scan of 2 mm × 2 mm area



b) Raw negative 500× microscope view
of 0.1 mm × 0.1 mm area

H Suppl.21(25)

Figure 1 – Fuji Superia™ 1 400 film

¹ Fuji Superia™ 400 is an example of film product available commercially. This information is given to describe examples used in this document and does not constitute an endorsement by ITU-T of the use of this product.

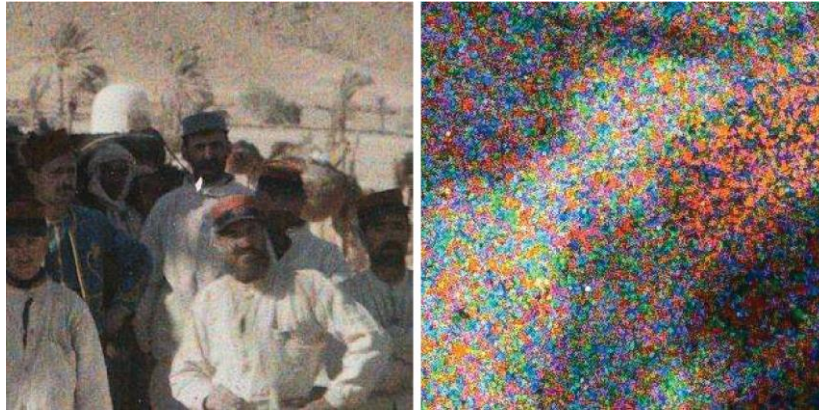


Figure 2 – 24 mm × 24 mm and 2.2 × 2.2 mm crops of a 1916 autochrome picture (13 cm × 18 cm glass plate) photograph by Albert Samama Chikly, scan courtesy of Ministère de la Culture / RMN-GP (France)

Film grain appearance is therefore inevitable because of the physical nature of the process embedded in the film design itself. However, historically, it was considered to be noise, and as such, technological advances have gone in the direction of its elimination.

The silver-halide crystals were engineered to be smaller and less visible, however due to the physical design and characteristics of analogue film, it was not possible to completely eliminate the grainy look. With the advancements of digital camera sensors and their widespread utilization, the grainy look has been mostly eliminated. Although digital sensors have brought many possibilities in terms of visual quality and visual processing, the "film look" lives on among professionals and film enthusiasts. Within the new era, film grain has turned into a visual tool and not just a by-product of chemical processing as in the case of analogue film stock.

Note that the term film grain also includes synthetic film grain that can be added in post-production to digitally captured high-value content for artistic effect or to mask imperfections in digital footage, which can otherwise look too sharp and unnatural. The term "film grain" can sometimes be used informally to refer to image sensor noise, particularly in low light and high-speed captures.

Therefore, perception of moderate grain texture is a desirable, often sought-after, characteristic in motion picture and video productions. Although the exact effect of the grain is not clear, it is considered a requirement in the motion picture industry to preserve the grainy appearance of images throughout the image processing and delivery chain. Intuitively, in this context, the presence of film grain can help to differentiate "real-world" images from "computer-generated" material, which are commonly created with no film grain. Furthermore, it is possible that film grain provides some visual cues that facilitate the correct perception of depth in two-dimensional pictures [Gomila-JVT-H022]. Even when movies are captured with digital cameras, artificial film grain can be added at a post-processing stage to create a specific look, which artists qualify as "soft", "organic", or "living". Synthetic film grain is also used to harmonize capture from different cameras, potentially mixing film and digital capture and different lighting conditions.

Film grain preservation during video distribution, and especially when targeting low bitrate applications, can be challenging for two reasons. First, compression gains related to temporal prediction cannot be fully leveraged because of the random nature of the grain. Film grain noise is temporally independent, and as a result, motion compensation cannot be efficiently used for its prediction. Second, the grain commonly appears at high spatial frequencies, and it is typically filtered with other noise by in-loop filters, such as deblocking filters, or due to the quantization process [Gomila-JVT-H022]. This challenge is more severe with recent coding formats, as bitrate gains have come along with noise elimination. In addition, the introduction of pre-filtering in the video distribution chain can potentially remove film grain prior to compression. The use of quantization

matrices [Groi-1113700] and [Groi-HVS] could potentially assist in the preservation of some of the film grain within the video content, however this also can have severe limitations, especially at lower bitrates, and for streaming applications.

This report focuses on film grain technology from the video compression and distribution point of view. It includes encoder-side and decoder-side aspects. On the encoder side, film grain technology provides means to denoise and/or analyse source video to improve compression and to determine statistical characteristics of the film grain to be synthesized at the decoder. At the decoder side, film grain technology provides the means to synthesize and blend film grain with the decoded video.

6.3 Film grain modelling

To synthesize grain, the use of light-dependent film grain model parameters can be useful, particularly for the simulation of photographic film grain, as photographic film grain is intrinsically light intensity (exposure) dependent. First, variation in film opacity is the result of a variation of grain density, as seen in Figure 1, which has an impact on the perceived grain. Also, film is organized in several layers (usually 3) for each colour component, with various light sensitivities to reach its full dynamic range. Light-sensitive crystals have a distribution of sizes. Larger crystals capture more photons and are more likely to be exposed than smaller crystals, particularly in darker regions. This results in a dependency of the noise characteristics on brightness. An example with both grain size and strength variation is shown in Figure 3.



Figure 3 – Kodak Vision™² 250D film and 3063 dots per inch (2.54 cm) scan of 2.7 × 2.7 mm areas of the same picture

6.4 Film grain use cases and applications

Two main film grain use cases are presented below:

- a) The first use case of film grain synthesis is artistic intent: to recreate the film grain at the decoder side, which was unavoidably lost due to compression involved in content distribution at practical bitrates. In this case, the film grain is considered to be a significant aspect of the video, and the content provider wants it to be part of the user experience. Preserving film grain through video compression would require too high bit rates for applications such as adaptive streaming and broadcasting. On the other hand, removing film grain allows using the full potential of video compression technologies, while requiring film grain synthesis after decoding.

² Kodak Vision™ 250D is an example of film product available commercially. This information is given to describe examples used in this document and does not constitute an endorsement by ITU-T of the use of this product.

- b) The second use case, which can also complement the first one, is the masking of compression impairments, like blocking, banding, "mosquito" noise, etc., including impairments due to quantization. If there is no artistic intent, then the constraints on film grain model accuracy can be relaxed. For this use case, the encoder can adjust film grain parameters to fit the coding parameters, so that the intended defect masking is effective (e.g., by adjusting noise amplitude based on quantization step sizes).

It was determined that removing the film grain by filtering the content, compressing, and providing information that enables the regeneration of the film grain, even if that is just an approximation, can result in more efficient coding performance and a better visual outcome. This is called film grain modelling. The use of film grain modelling technologies can be beneficial for image and video compression by providing improved subjective quality at a lower bitrate for certain types of video content. For example, these technologies can potentially provide benefits to video content that contains noise, such as film grain or image sensor noise.

Thus, film grain modelling technologies provide a means of optionally removing noise prior to or during the encoding process to improve compression efficiency and, subsequently, to reconstruct an approximation of the film grain during or after the decoding process. It can also be used to add visual noise to decoded video to mask or attenuate the visibility of compression artefacts. Note that visually pleasant noise can be added to the decoded video even if the source video had no visible noise/film grain to fulfil the masking task mentioned above.

6.5 Film grain workflow

Use of film grain modelling technologies to denoise a source video by using a pre-processor is illustrated in Figure 4. Source video is input to a denoising process that outputs a video sequence from which noise or film grain is attenuated or removed. A film grain parameterization process then compares the source and denoised videos to determine film grain model parameter values, which relate to the variance, spatial frequency characteristics, colour correlation, and other statistical characteristics of the film grain. The process of denoising followed by the film grain model parameter estimation is commonly referred to as the film grain analysis process. Such a process will be further discussed in Clause 8.

After these processes are performed, the denoised video is then encoded, and the film grain model parameter values are either signalled in the coded bitstream or provided to the decoder by some external means.

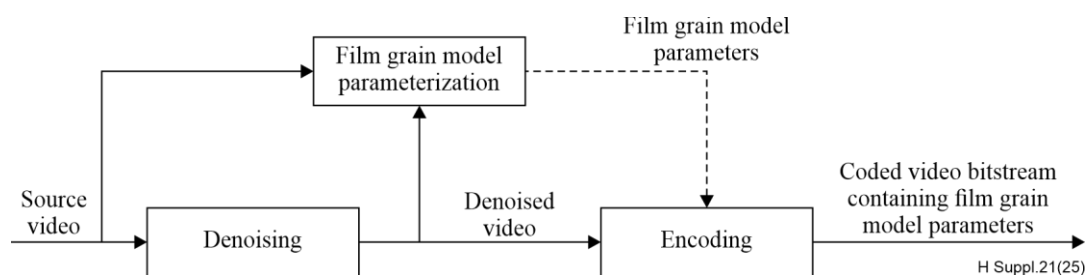


Figure 4 – Use of film grain modelling technologies with a denoising pre-processing stage

An alternative implementation of a film grain denoising and modelling system is also illustrated in Figure 5. In this case, the encoder itself acts as the denoising process.