

JAPANESE INDUSTRIAL STANDARD

JIS B 1301: 1996

Keys and their corresponding keyways

April, 1999

ERRATA

Page 10

In Attached Table 4, when the Nominal dimension of key is 90×45 or 100×50, the numerical value of the Fastening type is changed as follows:

Error - 0.0124

Correct - 0.124

Remarks: This erratum is for correcting the first edition of this Standard.

Japanese Standards Association

JAPANESE INDUSTRIAL STANDARD
Ⓔ JIS B 1301-1996
Keys and their corresponding keyways

April, 1997

ERRATA

Page 10

Attached Table 4, in column 4 (Sliding type b_2 , Tolerance(D10))

In lines 1 and 2, replace $\begin{array}{l} +0.060 \\ -0.020 \end{array}$ by $\begin{array}{l} +0.060 \\ +0.020 \end{array}$.

Page 12

Attached Table 6, in column 3 (Normal type b_1 , Tolerance(N9))

In lines 1 and 2, replace $\begin{array}{l} 0.004 \\ -0.029 \end{array}$ by $\begin{array}{l} -0.004 \\ -0.029 \end{array}$.

Remarks : This errata is for correcting the first edition of this Standard.
Japanese Standards Association

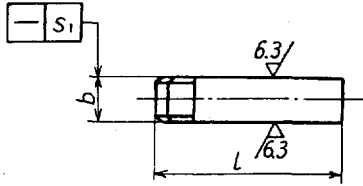
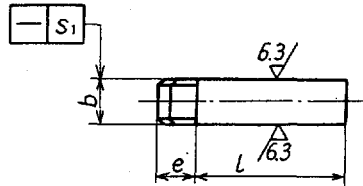
JAPANESE INDUSTRIAL STANDARD

JIS B 1301-1996

Keys and their corresponding keyways

December 1996

ERRATA

Page	Position	Wrong	Correct
7	Figure in Attached Table 2		

Remarks: This errata is for correcting the first edition of this Standard.

Japanese Standards Association

JIS

JAPANESE INDUSTRIAL STANDARD

Keys and their corresponding keyways

Ⓔ **JIS B 1301—1996**

Translated and Published

by

Japanese Standards Association

**In the event of any doubt arising,
the original Standard in Japanese is to be final authority**

Errata for JIS (English edition) are printed in *Standardization Journal*, published monthly by the Japanese Standards Association.

Errata will be provided upon request, please contact:

**Business Department,
Japanese Standards Association**
4-1-24, Akasaka, Minato-ku,
Tokyo, JAPAN 107
TEL. 03-3583-8002
FAX. 03-3583-0462

Errata are also provided to subscribers of JIS (English edition) in *Monthly Information*.



JAPANESE INDUSTRIAL STANDARD

J I S

Keys and their corresponding keyways

B 1301-1996

1. Scope This Japanese Industrial Standard specifies the parallel keys, taper keys and Woodruff keys made of steel used for general machines (hereafter referred to as "keys" in generic term) and their corresponding keyways.

Remarks 1. The standards cited in this Standard are as follows:

JIS B 0651 Instruments for the measurement of surface roughness by the stylus method

JIS Z 2241 Method of tensile test for metallic materials

2. The International Standards corresponding to this Standard are as follows.

ISO/R 773:1969 Rectangular or square parallel keys and their corresponding keyways

ISO/R 774:1969 Taper keys with or without gib head and their corresponding keyways

ISO 3912:1977 Woodruff keys and keyways

2. Classification and symbol of keys

2.1 Key The key shall be classified into six classes as shown in Table 1 according to its shape.

Table 1. Classification and symbol of keys

Shape		Symbol
Parallel key	Without hole for screw thread	P
	With hole for screw thread	PS
Taper key	Without gib head	T
	With gib head	TG
Woodruff key	Normal form	WA
	Whitney form	WB

2.2 Key end The end of parallel key shall be classified into three classes as shown in Fig. 1 according to its shape.

If not designated, key ends shall be of both ends rectangular or square.