

Passenger car - Disc brake caliper bench test procedure

1 Scope

This standard specifies a bench test procedure for service brakes in disc brake caliper assemblies (hereinafter referred to as "caliper assemblies") that normally operate in passenger cars. However, dynamometer tests on frictional characteristics are not included.

2 Normative reference

The following standards, when referred to in this standard, constitute a part of the specifications of this standard. The most recently updated version (including addenda) shall be applied.

JASO C 419	Passenger car - Service brake - Structural integrity dynamometer test procedure
JASO C 441	Service brake structural durability bench test procedure
JIS D 0106	Road vehicles - Brake types, braking mechanics and brake operation - Vocabulary
JIS D 0107	Road vehicles - Braking equipments - Vocabulary
JIS D 0210	General rules of brake test method of automobiles and motor cycles
JIS D 1601	Vibration testing methods for automobile parts
JIS K 2233	Non-petroleum base motor vehicle brake fluids
JIS Z 2371	Methods of salt spray testing

3 Terms and Definitions

Definitions of main terms used in this standard shall be based on **JIS D 0106**, **JIS D 0107** and as follows.

3.1

Required fluid volume

Quantity of brake fluid required to raise the fluid pressure inside the cylinder body to the prescribed fluid pressure

3.2

Residual drag torque

Torque that remains to resist disc rotation after the release of brake fluid pressure

3.3

Pad half-worn condition

Condition in which the thickness of the friction material, other than the pad's backing plate, has become half that of a new pad

3.4

Pad 2/3 worn condition

Condition in which the thickness of the friction material, other than the pad's backing plate, has become one third that of a new pad

3.5

Pad fully worn condition

Condition in which the friction material has become completely worn and only the backing plate remains

4 Common items


4.1 Condition of each braking device component

The condition of each braking device component during testing shall be as specified in 4.3 (condition of breaking equipment each part) of JIS D 0210 (hereinafter referred to as "standard products").

4.2. Test equipment

Unless otherwise specified, the following devices and instruments shall be utilized in tests:

- a) **Manual pressurizing device** Pressurizing device that is used in testing in which pressure is manually applied to the caliper assembly. Shall be capable of applying a pressure of 14 MPa or more to the caliper assembly per stroke (**Figure 1**).

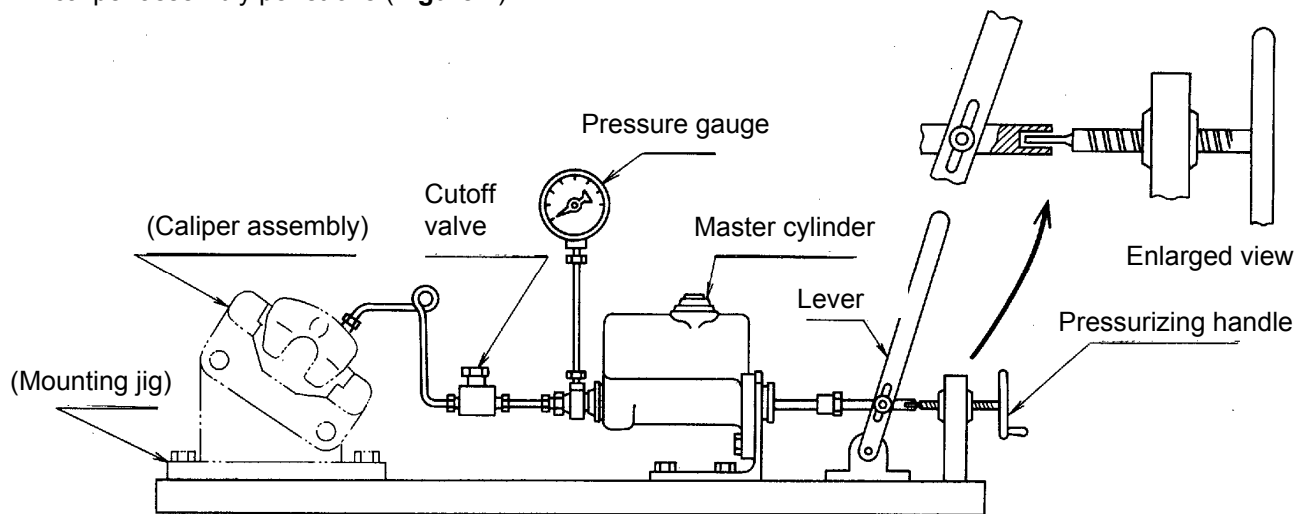

Note: For convenience, the lever for releasing air pressure from the caliper assembly can be operated independently from the pressurizing handle, as shown in the figure above.

Figure 1 Example of manual pressurizing device

- b) **Automatic pressurizing device** Pressurizing device that is used in testing in which pressure is repeatedly and automatically applied to the caliper assembly. Shall be capable of applying a pressure of 14 MPa or more to the caliper assembly per stroke (**Figure 2**).


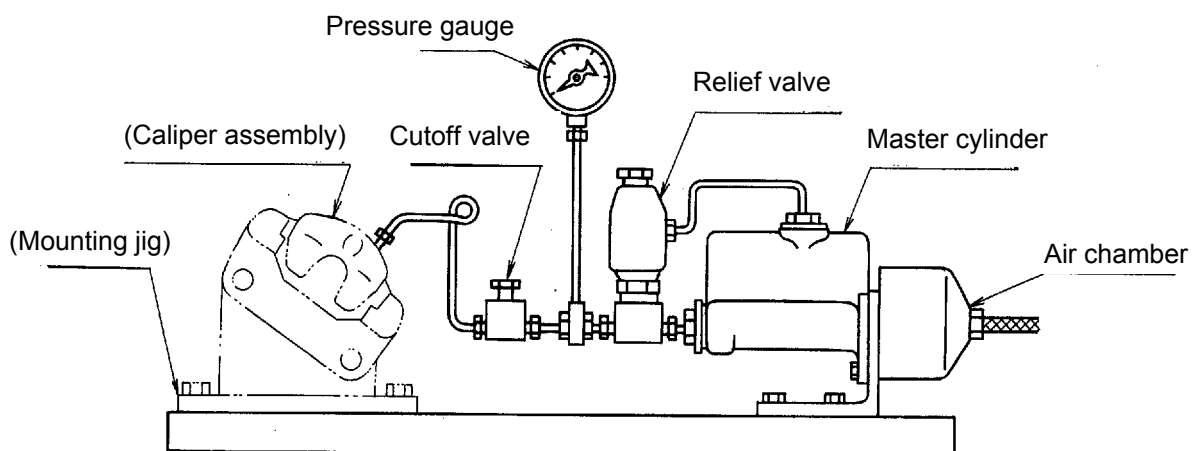


Figure 2 Example of automatic pressurizing device

c) **Mounting jig** Unless otherwise specified, mounting jigs used in tests shall enable the caliper assembly's location, mounting angle, and other mounting conditions to be equivalent to those of an actual vehicle (**Figure 3**).

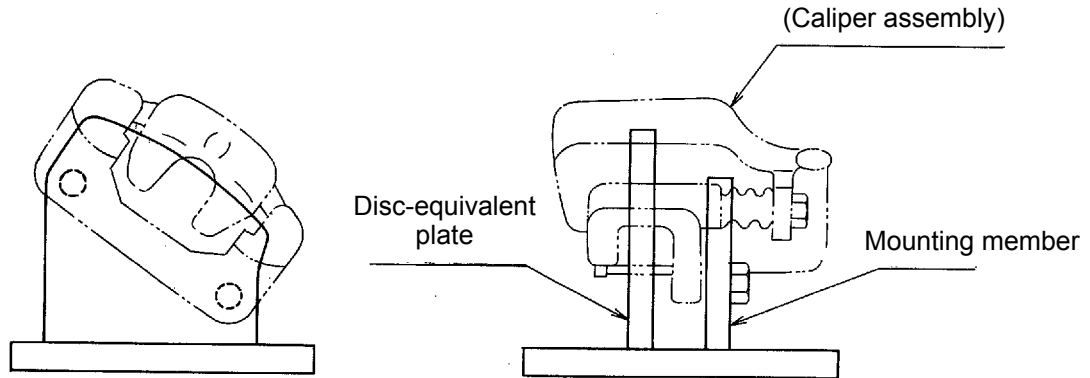

Note: For residual drag torque testing, the disc-equivalent plate shall be rotatable.

Figure 3 Example of mounting jig

4.3. Test fluid

The brake fluid used in testing shall be **Class 3** as specified in **JIS K 2233** or a test fluid agreed to by the parties concerned.

5 Test procedure

5.1 Test items

Test items for caliper assemblies shall consist of those listed below.

An outline of the test items is shown in **Annex B**.

- a) Fluid leakage test
- b) Required fluid displacement test
- c) Residual drag torque test
- d) Pressure and fracture resistance strength test
- e) Torque fracture strength test
- f) Torque durability strength test (I)
- g) Torque durability strength test (II)
- h) High fluid pressure durability strength test
- i) Normal temperature operational durability test
- j) High temperature operational durability test
- k) Vibration durability test
- l) Water proof test
- m) Corrosion resistance test
- n) Low temperature fluid leakage test

5.2 Fluid leakage test procedure

5.2.1 Purpose

This test shall be performed before and after other tests as necessary to check for fluid leakage from the caliper assembly.

5.2.2 Test equipment

The following devices and instruments shall be utilized in the test:

- a) **Pressurizing device** Manual pressurizing device specified in 4.2 a).
- b) **Mounting jig** Mounting jig specified in 4.2 c).

5.2.3 Condition of braking device

Unless otherwise specified, standard products specified in 4.1 shall be used.

5.2.4 Test procedure

The test procedure shall be as follows:

- a) Fasten the caliper assembly to the mounting jig, and bleed the air sufficiently.
- b) Apply fluid pressure of 0.7 MPa for 5 minutes, and check for fluid leakage.
- c) Apply fluid pressure of 10 kPa for 24 hours, and check for fluid leakage.

Note: A liquid column (approx. 1200 mm) can be used as a pressurizing device.

- d) Apply fluid pressure of 14 MPa for 1 minute, and check for fluid leakage.

Note: Test d) using high pressure shall not be performed prior to tests b) and c). And if other tests are to be performed subsequently to that, return the piston at least 1 mm before starting the other tests.

5.2.5 Records

Keep records of the following (A.1):

- a) Fluid leakage
- b) Other noteworthy items

5.3 Required fluid displacement test procedure

5.3.1 Purpose

This test shall be performed to check the required fluid volume which is the basic performance of the caliper assembly.

5.3.2 Test equipment

The following devices and instruments shall be utilized in the test (**Figure 4**).

a) Pressurizing device

- 1) Use the manual pressurizing device specified in 4.2 a).
- 2) The pressurizing device shall be fixed at a location 300 to 600 mm higher than the caliper assembly.
- 3) The relationship between the pressurizing device's piston stroke (travel) and required fluid volume shall be found beforehand.

b) Mounting jig

Mounting jig specified in 4.2 c).

c) Piping

- 1) When installing piping, ensure that, during pressure application and reduction, the motion of the caliper assembly is not constrained by a force greater than that generated in an actual vehicle.
- 2) A short brake tube shall be used for the piping between the caliper assembly and cutoff valve in order to minimize the fluid volume in that area.

- d) Recording device** Shall be capable of recording the piston stroke (travel) of the pressurizing device against fluid pressure.

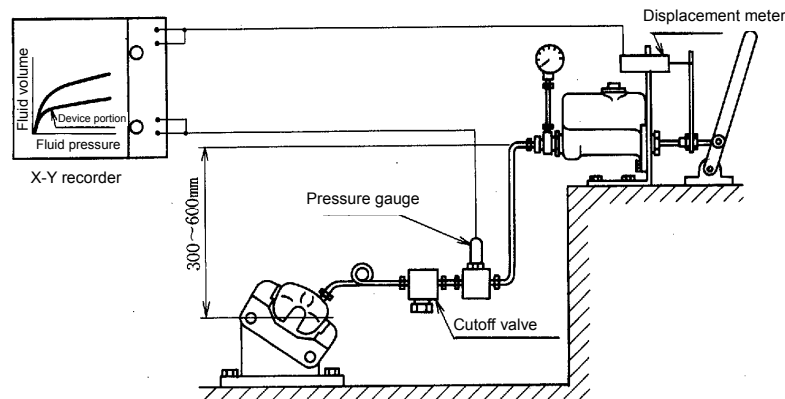


Figure 4 Example of required fluid volume test equipment

5.3.3 Condition of braking device

Standard products specified in 4.1 shall be used.

5.3.4 Test procedure

The test procedure shall be as follows:

- a) Fasten the caliper assembly to the mounting jig, and bleed the air sufficiently.
- b) Close the cutoff valve, apply pressure up to 7.0 MPa, and record the stroke (travel) of the pressurizing device as the portion corresponding to the fluid volume of the remaining system other than the caliper assembly.
- c) Open the cutoff valve, and push back the piston of the caliper assembly to provide a clearance of at least 0.5 mm per pad.
- d) Apply a fluid pressure of 1.0 MPa for five seconds. Repeat this action 15 times to achieve a proper setting. Note that the duration necessary for increasing and decreasing the pressure is at least two seconds.
- e) After leaving it alone for two minutes, slowly (over a span of at least two seconds) increase the pressure to 7.0 MPa. Record the stroke of the pressurizing device as the portion corresponding to the fluid volume of the entire system, including the caliper assembly.
- f) Repeat steps c) to e) five times.
- g) Change the fluid pressure in d) to 7.0 MPa, and repeat steps c) to e) five times.
- h) Convert the difference between the recorded strokes (travel distances) in e) and b) into fluid volume to find the required fluid volume of the caliper system.

5.3.5. Records

Keep records of the following (A.2):

- a) Relationship between fluid pressure and required fluid volume (average of five results obtained for each setting fluid pressure)
- b) Other noteworthy items

5.4 Residual drag torque test procedure

5.4.1 Purpose

This test shall be performed to check the residual drag force which is the basic performance of the caliper assembly.

5.4.2 Test equipment

The following devices and instruments shall be utilized in the test (**Figure 5**):

- a) **Pressurizing device** Manual pressurizing device specified in **4.2 a)**. However, ensure that the pressurizing device is fixed at a location 300 to 600 mm higher than the caliper assembly.
- b) **Mounting jig** Mounting jig specified in **4.2 c)**. However, ensure that mounting surfaces of the caliper assembly and disc are parallel to within 0.05 mm.
- c) **Disc** Generally, use a disc that is used in the actual vehicle. However, it is permissible to use an equivalent disc that has been machined to the same precision as a disc used in the actual vehicle.
- d) **Disc drive unit** The rotational speed shall be 50 min^{-1} or less. However, a unit that is driven manually may also be used.
- e) **Torque measuring device** The torque measuring device shall be an electric type that is capable of measuring up to 3000 N·cm. However, a torque wrench may be used if the disc is to be rotated manually.
- f) **Piping** When installing piping, ensure that, during pressure application/reduction and disc rotation, the motion of the caliper assembly is not constrained by a force greater than that generated in an actual vehicle.

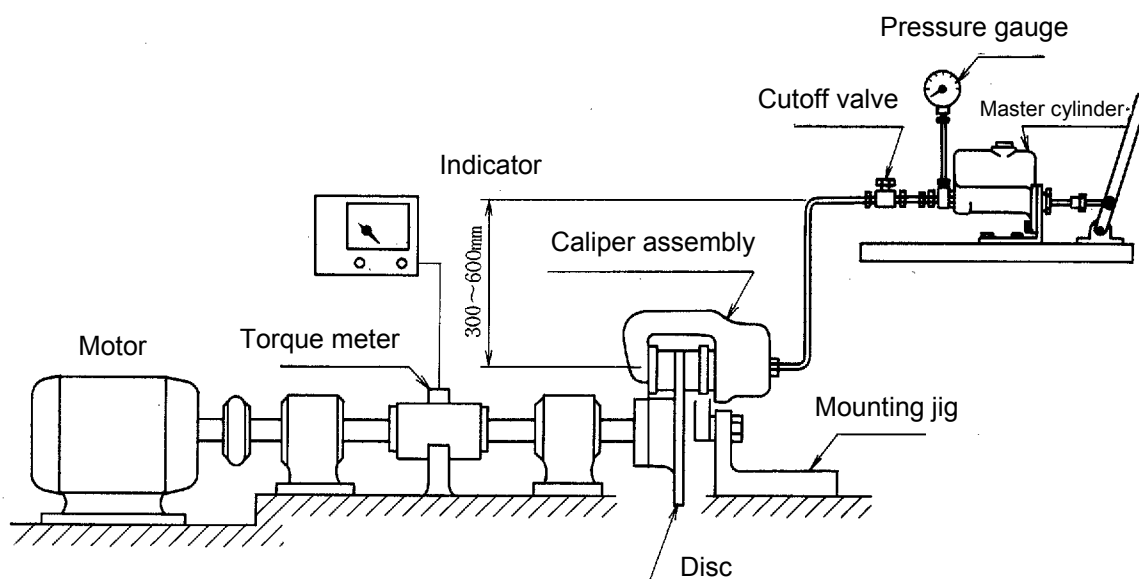


Figure 5 Example of residual drag torque test equipment

5.4.3 Condition of braking device

Standard products specified in **4.1** shall be used.

5.4.4 Test procedure

The test procedure shall be as follows:

- a) Clean the disc's friction surfaces with acetone or similar product.
- b) Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.

- c) Push back the piston of the caliper assembly to provide a clearance of at least 0.5 mm per pad.
- d) Spin the disc and adjust the zero point of the residual drag torque indicator.
- e) Apply a fluid pressure of 1.0 MPa for five seconds. Repeat this action 15 times to achieve a proper setting. Note that the duration necessary for increasing and decreasing the pressure is at least two seconds.
- f) After leaving it alone for two minutes, rotate the disc. Measure the maximum and minimum torque of the first and tenth revolutions.
- g) Change the fluid pressure in e) to 7.0 MPa, and repeat steps c) to f).

5.4.5 Records

Keep records of the following (A.3):

- a) Maximum and minimum residual drag torque (of the first and tenth revolutions for each preset fluid pressure)
- b) Disc surface runout
- c) Other noteworthy items

5.5 Pressure and fracture resistance strength test procedure

5.5.1 Purpose

This test shall be performed to check the yield point fracture strength, while tracking the process of deformation caused by fluid pressure in the caliper assembly.

5.5.2 Test equipment

The following devices and instruments shall be utilized in the test (Figure 6):

- a) **Pressurizing device** Manual pressurizing device specified in 4.2 a). However, it shall be capable of applying a fluid pressure of at least 50 MPa.
- b) **Mounting jig** Mounting jig specified in 4.2 c).
- c) **Displacement indicator** The displacement indicator will be used to measure the displacement of the caliper assembly in the axial direction at a given fluid pressure during the test.
The indicator shall be accurate to ± 1 % or better.

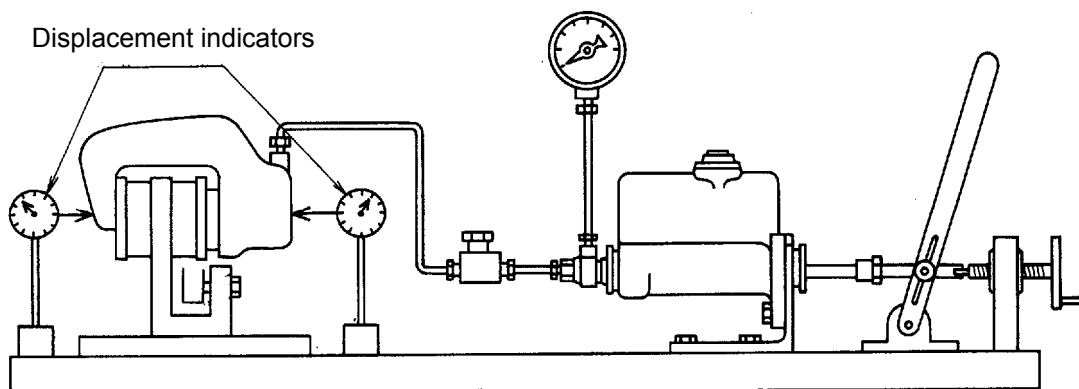


Figure 6 Example of pressure and fracture resistance strength test equipment

5.5.3 Condition of braking device


Standard products specified in 4.1 shall be used. If, however, the parking brake is integrated with the service brake, parts related to the parking brake can be removed before the test.

5.5.4 Test procedure

The test procedure shall be as follows:


- a) As preparation for the test, provide a flat area at the measuring point to prevent measurement errors caused by roughness on the casting surface. As a rule, the measuring point shall be on the cylinder axis. If, however, that is not possible, alternative points shall be selected (**Figure 7**).
- b) Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.
- c) Attach a displacement gauge to measure the displacement of the caliper assembly in the axial direction at the centre of the cylinder.
- d) Apply a fluid pressure of 7.0 MPa for five seconds. Repeat this action 15 times to obtain a proper setting, and adjust the zero point of the displacement indicator.
- e) Gradually increase the fluid pressure, and calculate the amount of caliper deformation in the axial direction from the values indicated by the displacement gauge. Record the relationship between that and the fluid pressure (**Figure 7**).
- f) Continue measuring up to the pressure at which the fluid pressure and deformation lose their proportional relationship. If there is a risk of the caliper assembly breaking and the displacement indicator becoming damaged as a result of the increasing pressure, the indicator can be removed.
- g) While watching for fluid leakage and abnormalities in the components, increase the pressure until the caliper assembly breaks. If, however, no breaking occurs within the capacity limit of the pressurizing device, stop the test and record that fact.

a) Example 1

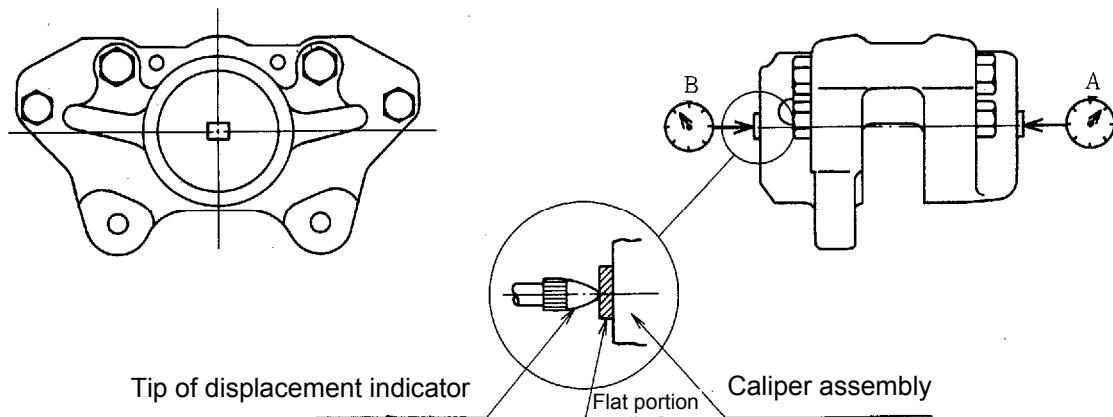

$$\text{Axial-direction deformation} = |\text{Indicated value A} + \text{Indicated value B}|$$

b) Example 2

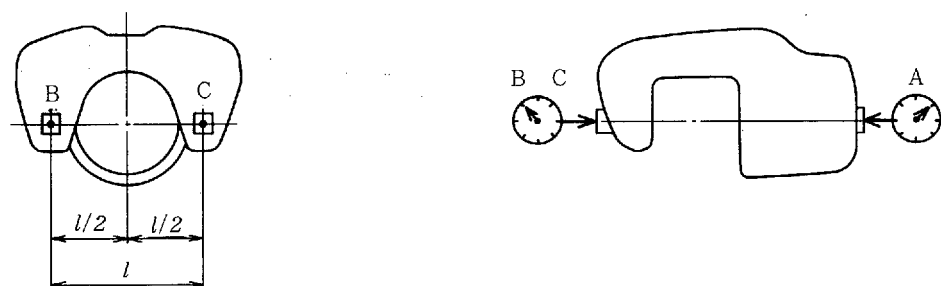

$$\text{Axial-direction deformation} = |\text{Indicated value A} + (\text{Indicated value B} + \text{Indicated value C})/2|$$

Figure 7 Examples of displacement indicator installation

5.5.5 Records

Keep records of the following (A.4):

- a) Amount of caliper assembly deformation in axial direction
- b) Fracture pressure, fracture or deformation state
- c) Other noteworthy items

5.6 Torque fracture strength test procedure

5.6.1 Purpose

This test shall be performed to check the yield condition and fracture of the caliper assembly, while tracking the process of permanent deformation caused by braking.

5.6.2 Test equipment

An inertia dynamometer shall be used.

5.6.3 Condition of braking device

Standard products specified in 4.1 shall be used.

5.6.4 Test procedure and records

The detailed test procedure and records are described in **JASO C 419** 6.1(fracture strength test). (5.6 of **Table B.1**)

5.7 Torque durability strength test procedure (I)

5.7.1 Purpose

This test shall be performed to check the durability of a caliper assembly under load conditions that are more severe than normal.

5.7.2 Test equipment

An inertia dynamometer shall be used.

5.7.3 Condition of braking device

Standard products specified in **4.1** shall be used.

5.7.4 Test procedure and records

The detailed test procedure and records are described in **JASO C 419** 6.2 (durability strength test). (5.7 of **Table B.1**)

5.8 Torque durability strength test procedure (II)

5.8.1 Purpose

This test shall be performed to check the durability of a caliper assembly under normal loading torque conditions.

5.8.2 Test equipment

A cyclic test device specified in **JASO C 441** shall be used.

5.8.3 Condition of braking device

Standard products specified in **4.1** shall be used.

5.8.4 Test procedure and records

The detailed test procedure and records are described in **JASO C 441**. (5.8 of **Table B.1**)

5.9 High fluid pressure durability strength test procedure

5.9.1 Purpose

This test shall be performed to check the durability of a caliper assembly under fluid pressure conditions that are more severe than normal.

5.9.2 Test equipment

The following devices and instruments shall be utilized in the test:

- a) Pressurizing device** Automatic pressurizing device specified in **4.2 b)**
- b) Mounting jig** Mounting jig specified in **4.2 c)**

5.9.3 Condition of braking device

Standard products specified in **4.1** shall be used.

5.9.4 Test procedure

The test procedure shall be as follows:

- a)** Measure the dimensions of each component of the caliper assembly as needed.
- b)** Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.

- c) The high fluid pressure durability strength test shall be performed without interruption under the conditions shown in **Table 1**. Observe and record any leakage found from the seal edges after the test.
- d) After the completion of the 10,000th cycle, measure the dimensions of each component of the caliper assembly again as needed. Check the caliper opening, pad deformation or crushing, seal wear or damage, and other details.

Table 1 High fluid pressure durability strength test conditions

Fluid pressure: MPa	14±0.5
Cycle rate: Cycles/h	1 000±100
Cycles required: Cycles	1×10 ⁴

5.9.5 Records

Keep records of the following (**A.5**):

- a) Fluid leakage
- b) Cracks or destruction
- c) Caliper opening, pad deformation or crushing, permanent deformation of components, seal wear and damage, etc.
- d) Other noteworthy items

5.10 Normal temperature operational durability test procedure

5.10.1 Purpose

This test shall be performed to check the fluid pressure operational durability of the caliper assembly's piston seal, particularly under normal temperature conditions.

5.10.2 Test equipment

The following devices and instruments shall be utilized in the test:

- a) **Pressurizing device** Automatic pressurizing device specified in **4.2 b)**
- b) **Mounting jig** Mounting jig specified in **4.2 c)**

5.10.3 Condition of braking device

Standard products specified in **4.1** shall be used. The pad thickness, however, shall be in a half-worn condition.

5.10.4 Test procedure

The test procedure shall be as follows:

- a) Before the test, if necessary, measure and record the dimensions relevant to the piston seal (seal dimensions, hardness, etc.) and the basic performance of the caliper assembly, such as the residual drag torque and required fluid volume.
- b) Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.
- c) Perform the normal temperature operational durability test under the test conditions specified in **Table 2**. Observe and record any fluid leakage found from the seal edges after the test.

Table 2 Normal temperature operational durability test conditions

Temperature °C	4 to 35
Fluid pressure MPa	7±0.3
Cycle rate: Cycles/h	1 000±100
Cycles required: Cycles	50×10 ⁴

- d) Perform the fluid leakage test as specified in **5.2**.
- e) Measure and record as specified in **a)** as needed.
- f) Disassemble the caliper assembly, and observe and record the condition of the seal, cylinder inner surface, and piston.

5.10.5 Records

Keep records of the following (**A.6**):

- a) Fluid leakage discovered after the test.
- b) Results of the fluid leakage test.
- c) Condition of the seal, cylinder inner surface, and piston after the test.
- d) Changes in the dimensions relevant to the piston seal (seal dimensions, hardness, etc.), required fluid volume, and residual drag torque as needed.
- e) Other noteworthy items

5.11 High temperature operational durability test procedure

5.11.1 Purpose

This test shall be performed to check the fluid pressure operational durability of the caliper assembly's piston seal, particularly under high-temperature conditions.

5.11.2 Test equipment

The following devices and instruments shall be utilized in the test:

- a) **Pressurizing device** Automatic pressurizing device specified in **4.2 b)**
- b) **Mounting jig** Mounting jig specified in **4.2 c)**
- c) **Constant-temperature oven** Shall be capable of maintaining the caliper assembly in a $(120 \pm 5)^{\circ}\text{C}$ atmosphere.

5.11.3 Condition of braking device

Standard products specified in **4.1** shall be used. The pad thickness, however, shall be in a half-worn condition.

5.11.4 Test procedure

The test procedure shall be as follows:

- a) Before the test, if necessary, measure and record the dimensions relevant to the piston seal (seal dimensions, hardness, etc.) and the basic performance of the caliper assembly, such as the residual drag torque and required fluid volume.
- b) Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.
- c) Perform the high temperature operational durability test under the test conditions specified in **Table 3**. After the test, observe and record any fluid leakage discovered from the seal edges.
- d) After completion of the test, promptly suspend heating and operation, and release the residual pressure. Open the door of the constant-temperature oven, and cool for 60 minutes.
- e) After cooling for 60 minutes, set the caliper assembly outside the oven and allow it to cool at room (ambient) temperature for (25 ± 5) hours. After cooling, record any fluid leakage observed from the seal edges.

Table 3 High temperature operational durability test conditions

Temperature:	°C	120±5
Fluid pressure:	MPa	7±0.3
Cycle rate:	Cycles/h	1 000±100
Cycles required:	Cycles	7×10 ⁴

Note: Start the operational durability test after the ambient temperature has reached the temperature indicated in **Table 3**.

- f) Perform a fluid leakage test as specified in **5.2**.
- g) Measure and record as specified in **a)** as needed.
- h) Disassemble the caliper assembly, and observe and record the conditions of the seal, cylinder inner surface, and piston.

5.11.5 Records

Keep records of the following (**A.7**):

- a) Fluid leakage discovered after the test.
- b) Results of the fluid leakage test.
- c) Conditions of the seal, cylinder inner surface, and piston after the test.
- d) Changes in the dimensions relevant to the piston seal (seal dimensions, hardness, etc.), required fluid volume, and residual drag torque as needed.
- e) Other noteworthy items

5.12 Vibration durability test procedure

5.12.1 Purpose

This test shall be performed to check the vibration durability of the caliper assembly.

5.12.2 Test equipment

The following devices and instruments shall be utilized in the test (**Figure 8**):

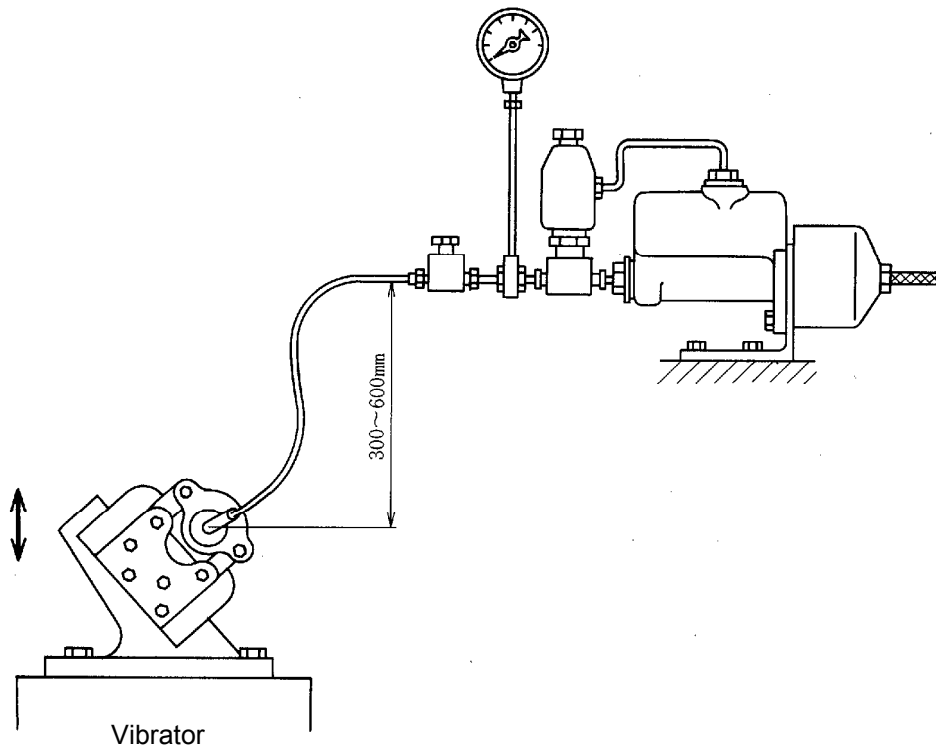


Figure 8 Example of vibration durability test equipment

- a) Vibrator** The vibrator or shake table shall be capable of performing the vibration durability test specified in **JIS D 1601**. With the caliper assembly and mounting jig placed on top, the vibrator shall be capable of continuous vibration under the test conditions specified in **Table 4**.
- b) Pressurizing device** The automatic pressurizing device specified in **4.2 b)** shall be used. However, ensure that the pressurizing device is fixed at a location 300 to 600 mm higher than the caliper assembly.
- c) Mounting jig** The mounting jig specified in **4.2 c)** shall be used. However, the rigidity of the jig shall be sufficiently high to prevent resonance.
- d) Piping** In the piping system, the brake hose shall be connected to the caliper assembly joint section so as not to restrict the vibration of the caliper assembly vibration.

Table 4 Vibration durability test conditions

Vibration acceleration:	m/s ²	±200 (vertical direction)
Vibration frequency:	Hz	60 (See Remark)
Vibrations:	number	500×10 ⁴
Applied fluid pressure:	MPa	3.5; however, fluid pressure shall be applied in one-minute intervals and held for one second each time.

Note: If there are resonance points in the caliper parts at a vibration frequency of 60 Hz, the test frequency can be changed after discussion between the parties concerned.

5.12.3 Condition of braking device

Standard products specified in **4.1** shall be used as follows:

- a)** The pad thickness shall be in a 2/3 worn condition.

- b) The tightening torque of bolts and screws shall be set at the lower limit.

5.12.4 Test procedure

The test procedure shall be as follows:

- a) Before the test, measure the dimensions of each brake component if necessary.
- b) Fasten the caliper assembly to the mounting jig, and bleed the air sufficiently.
- c) Perform the vibration durability test through continuous operation under the test conditions indicated in **Table 4**. The waveform, however, should be as close to a sine wave as possible.

Incidentally, if an abnormality occurs, the test shall be stopped.

And if, due to the circumstances, it is not possible to carry out continuous operation, the operation can be stopped temporarily.

5.12.5 Records

Keep records of the following (A.8):

- a) Cracks or destruction
- b) Missing or damaged parts
- c) Loose bolts or screws
- d) Fatigue settling (wear) and deformation
- e) Fluid leakage
- f) Caliper sliding resistance and piston sliding resistance (Record if necessary.)
- g) Other noteworthy items

5.13 Water proof test procedure

5.13.1 Purpose

This test shall be performed to check the water proof (sealing performance) of the caliper assembly boot.

5.13.2 Test equipment

The following devices and instruments shall be utilized in the test (**Figure 9**):

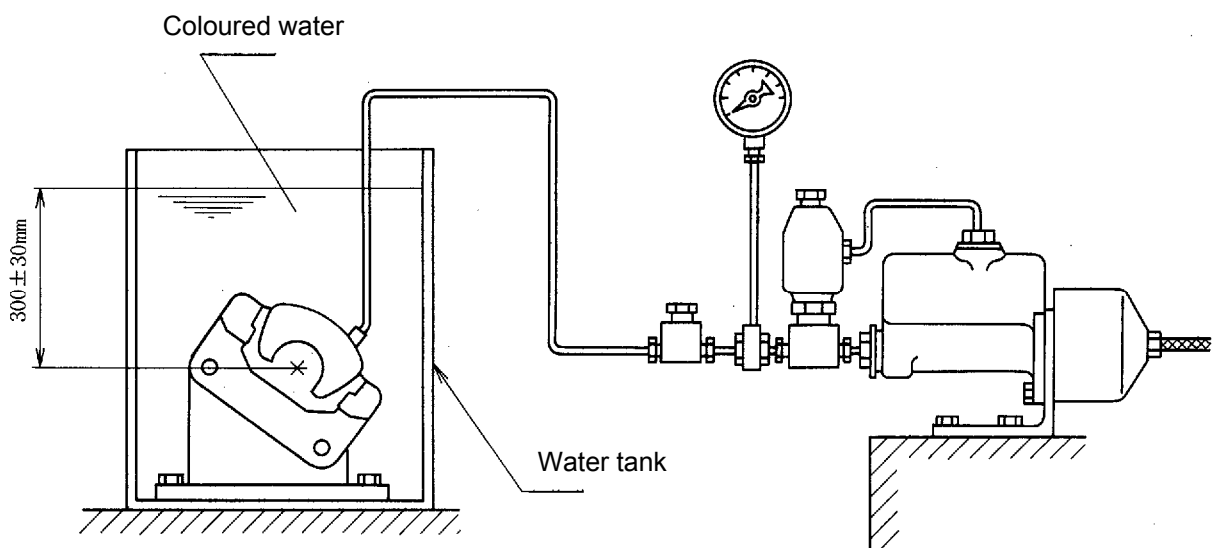


Figure 9 Example of water proof test equipment

- a) **Pressurizing device** Automatic pressurizing device specified in 4.2 b)

- b) Mounting jig** Mounting jig specified in 4.2 c)
- c) Constant-temperature oven** Oven capable of maintaining the caliper assembly in a $(120\pm 5)^{\circ}\text{C}$ atmosphere
- d) Water tank** Appropriate container capable of maintaining the caliper assembly at a water depth of (300 ± 30) mm

5.13.3 Condition of braking device

Prepare one standard product as specified in 4.1, as well as another standard product to which a fully worn pad is attached.

5.13.4 Test procedure

The test procedure shall be as follows:

- a)** If necessary as preparation for the test, measure the dimensions of the boot seal to be tested.
- b)** Firmly secure each prepared caliper assembly to its respective mounting jig, and bleed the air sufficiently.
- c)** Apply a fluid pressure of 3.5 MPa, and adjust the axial-direction positions of the pad and piston until they correspond to the conditions in an actual vehicle.
- d)** Place each caliper assembly in a constant-temperature oven at $120\pm 5^{\circ}\text{C}$, and heat continuously for 70 hours. If, however, the assembly cannot be placed in the oven with the piping attached, the piping can be removed.
- e)** Remove the assembly from the constant-temperature oven, and allow it to cool to the ambient temperature.
- f)** With the caliper assembly connected to the pressurizing device, immerse it into a water tank containing coloured water to facilitate observation of water intrusion. Place the centre of the cylinder at a depth of (300 ± 30) mm below the water surface.
- g)** At a fluid pressure of (3.5 ± 0.15) MPa, run 500 cycles at a rate of (1000 ± 100) cycles per hour.
- h)** Remove the sample from the water tank, and carefully wipe off the water adhering to the sample's exterior.
- i)** Remove the boots. Observe and record the condition of water intrusion inside the boots.
- j)** Measure the dimensions of the boot seal after the test as needed. Compare them to the dimensions obtained prior to the test to determine the change in tightening allowance range of the seal.

5.13.5 Records

Keep records of the following (A.9):

- a)** Water intrusion condition
- b)** Change in tightening allowance of seal
- c)** Other noteworthy items

5.14 Corrosion resistance test procedure

5.14.1 Purpose

This test shall be performed to check the corrosion resistance of the caliper assembly, using the salt spray method.

5.14.2 Test equipment

The following devices and instruments shall be utilized in the test (Figure 10):

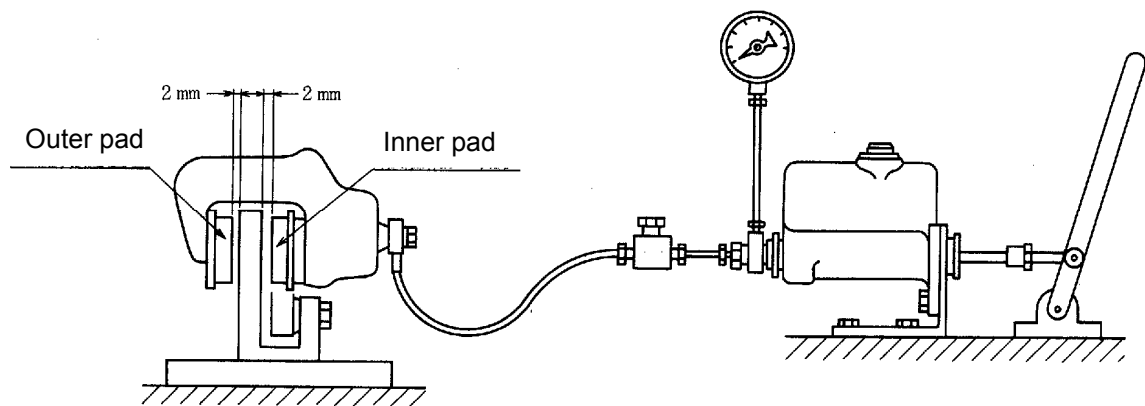


Figure 10 Example of threshold fluid pressure measuring device

- a) **Pressurizing device** Manual pressurizing device specified in 4.2 a)
- b) **Mounting jig** Use the mounting jig specified in 4.2 c). However, the thickness of the disc-equivalent plate shall be such that each pad can achieve a stroke of at least 2.0 mm.
- c) **Salt spray device** Shall meet the conditions for a salt spray chamber specified in JIS Z 2371.
- d) **Constant temperature and humidity oven** Shall be capable of maintaining a temperature of $(35\pm 2)^{\circ}\text{C}$ and humidity of $(95\pm 3)\%$.

5.14.3 Condition of braking device

Standard products specified in 4.1 shall be used.

5.14.4 Test procedure

The test procedure shall be as follows:

- a) Fix the caliper assembly to the mounting jig, and bleed the air sufficiently.
- b) After pushing back each pad from the surface of the disc-equivalent plate at least 2.0 mm, gradually apply fluid pressure to the caliper assembly, and measure the fluid pressure at which each pad starts to move (hereinafter referred to as the "threshold fluid pressure").
- c) After adjusting the axial-direction positions of the pad and piston to those corresponding to actual vehicle conditions, remove the piping and provide an appropriate plug to prevent spray fluid from getting into the joint section.
- d) Perform 72 hours of continuous spraying, using the method specified in JIS Z 2371.
- e) Remove the sample from the salt spray device, and leave it alone for 96 hours in the constant temperature and humidity oven under the following conditions:
 - Temperature $(35\pm 2)^{\circ}\text{C}$
 - Humidity $(95\pm 3)\%$
- f) Regarding d) and e) as one cycle, perform 12 cycles.
- g) After completing the 12 cycles, fasten it to the mounting jig and connect it to the pressurizing device.
- h) Gradually increase the pressure, and measure the threshold fluid pressure for each pad.

5.14.5 Records

Keep records of the following (A.10):

- a) Observe, and take photos of rust formation and seizure conditions in each cycle.