

KES


Castle Nut

KES G-R117


(EST.) 1987 - 09 - 20



<NUT of below MIZ>

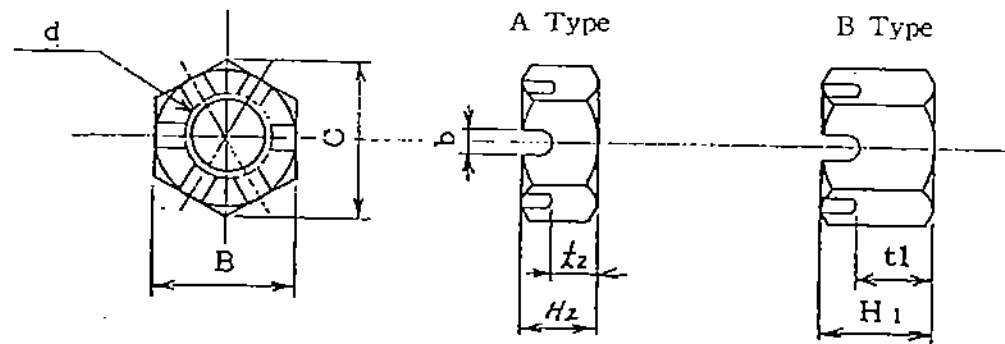

<NUT fo above MIZ>

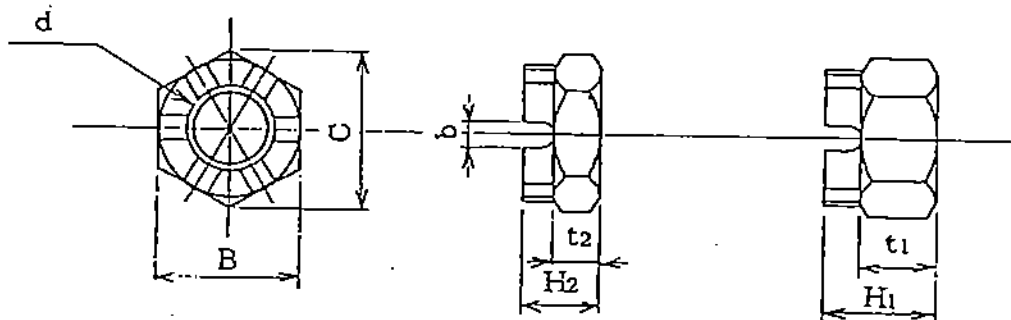

SIZE NO	Normal d	H ₁		t ₁		H ₂		t ₂		b	C	B	
		Stand- ard	Tole- rance	Stand- ard	Tole- rance	Stand- ard	Tole- rance	Stand- ard	Tole- rance				
1000	M10×1.5	12	±0.2	8	0	9	±0.2	5	0	2.5	16.2	14	
1200	M12×1.75	15		10		10		6	-0.3	3.5	19.2	17	
1400	M14×2	16		11		11		7	0	4.5	24.2	21	
1600	M16×2	19	±0.25	13	12	8		26.6			23		
1800	M18×2.5	22		16	13	8		30			26		
2000	M20×2.5	22		18		15		9	-0.4	5.5	33.5	29	
2200	M22×2.5	26									37	32	
2400	M24×3	26									40.4	35	

Table 1

※ Application split pin

100 → 2020 1200 → 3020 1400 → 3025 1600 → 4030

1800 → 4030 2000 → 4035 2200 → 5040 2400 → 5040

Introductory remarks) KES G - R 117 - 1000A