

NFPA 70[®]

National Electrical Code[®]

International Electrical Code[®] Series

2020





Copyright © 2019
National Fire Protection Association®
One Batterymarch Park
Quincy, Massachusetts 02169-7471

NFPA, *NFPA 70*, *National Fire Protection Association*, *National Electrical Code*, and *NEC* are registered trademarks of the National Fire Protection Association.

IMPORTANT NOTICES AND DISCLAIMERS CONCERNING NFPA® STANDARDS

NFPA® codes, standards, recommended practices, and guides (“NFPA Standards”), of which the document contained herein is one, are developed through a consensus standards development process approved by the American National Standards Institute. This process brings together volunteers representing varied viewpoints and interests to achieve consensus on fire and other safety issues. While the NFPA administers the process and establishes rules to promote fairness in the development of consensus, it does not independently test, evaluate, or verify the accuracy of any information or the soundness of any judgments contained in NFPA Standards.

The NFPA disclaims liability for any personal injury, property, or other damages of any nature whatsoever, whether special, indirect, consequential or compensatory, directly or indirectly resulting from the publication, use of, or reliance on NFPA Standards. The NFPA also makes no guaranty or warranty as to the accuracy or completeness of any information published herein.

In issuing and making NFPA Standards available, the NFPA is not undertaking to render professional or other services for or on behalf of any person or entity. Nor is the NFPA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

The NFPA has no power, nor does it undertake, to police or enforce compliance with the contents of NFPA Standards. Nor does the NFPA list, certify, test, or inspect products, designs, or installations for compliance with this document. Any certification or other statement of compliance with the requirements of this document shall not be attributable to the NFPA and is solely the responsibility of the certifier or maker of the statement.



ALERT: THIS STANDARD HAS BEEN MODIFIED BY A TIA OR ERRATA

Users of NFPA codes, standards, recommended practices, and guides (“NFPA Standards”) should be aware that NFPA Standards may be amended from time to time through the issuance of a Tentative Interim Amendment (TIA) or corrected by Errata. An official NFPA Standard at any point in time consists of the current edition of the document together with any TIAs and Errata then in effect.

To determine whether an NFPA Standard has been amended through the issuance of TIAs or corrected by Errata, go to www.nfpa.org/docinfo to choose from the list of NFPA Standards or use the search feature to select the NFPA Standard number (e.g., NFPA 13). The document information page provides up-to-date document-specific information as well as postings of all existing TIAs and Errata. It also includes the option to register for an “Alert” feature to receive an automatic email notification when new updates and other information are posted regarding the document.

IMPORTANT NOTICES AND DISCLAIMERS CONCERNING NFPA® STANDARDS

Updating of NFPA Standards

Users of NFPA codes, standards, recommended practices, and guides (“NFPA Standards”) should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of Tentative Interim Amendments or corrected by Errata. An official NFPA Standard at any point in time consists of the current edition of the document together with any Tentative Interim Amendments and any Errata then in effect. In order to determine whether a given document is the current edition and whether it has been amended through the issuance of Tentative Interim Amendments or corrected through the issuance of Errata, consult appropriate NFPA publications such as the National Fire Codes® Subscription Service, visit the NFPA website at www.nfpa.org, or contact the NFPA at the address listed below.

Interpretations of NFPA Standards

A statement, written or oral, that is not processed in accordance with Section 6 of the Regulations Governing the Development of NFPA Standards shall not be considered the official position of NFPA or any of its Committees and shall not be considered to be, nor be relied upon as, a Formal Interpretation.

Patents

The NFPA does not take any position with respect to the validity of any patent rights referenced in, related to, or asserted in connection with an NFPA Standard. The users of NFPA Standards bear the sole responsibility for determining the validity of any such patent rights, as well as the risk of infringement of such rights, and the NFPA disclaims liability for the infringement of any patent resulting from the use of or reliance on NFPA Standards.

NFPA adheres to the policy of the American National Standards Institute (ANSI) regarding the inclusion of patents in American National Standards (“the ANSI Patent Policy”), and hereby gives the following notice pursuant to that policy:

NOTICE: The user’s attention is called to the possibility that compliance with an NFPA Standard may require use of an invention covered by patent rights. NFPA takes no position as to the validity of any such patent rights or as to whether such patent rights constitute or include essential patent claims under the ANSI Patent Policy. If, in connection with the ANSI Patent Policy, a patent holder has filed a statement of willingness to grant licenses under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license, copies of such filed statements can be obtained, on request, from NFPA. For further information, contact the NFPA at the address listed below.

Law and Regulations

Users of NFPA Standards should consult applicable federal, state, and local laws and regulations. NFPA does not, by the publication of its codes, standards, recommended practices, and guides, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

NFPA Standards are copyrighted. They are made available for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of safe practices and methods. By making these documents available for use and adoption by public authorities and private users, the NFPA does not waive any rights in copyright to these documents.

Use of NFPA Standards for regulatory purposes should be accomplished through adoption by reference. The term “adoption by reference” means the citing of title, edition, and publishing information only. Any deletions, additions, and changes desired by the adopting authority should be noted separately in the adopting instrument. In order to assist NFPA in following the uses made of its documents, adopting authorities are requested to notify the NFPA (Attention: Secretary, Standards Council) in writing of such use. For technical assistance and questions concerning adoption of NFPA Standards, contact NFPA at the address below.

For Further Information

All questions or other communications relating to NFPA Standards and all requests for information on NFPA procedures governing its codes and standards development process, including information on the procedures for requesting Formal Interpretations, for proposing Tentative Interim Amendments, and for proposing revisions to NFPA standards during regular revision cycles, should be sent to NFPA headquarters, addressed to the attention of the Secretary, Standards Council, NFPA, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101; email: stds_admin@nfpa.org

For more information about NFPA, visit the NFPA website at www.nfpa.org. All NFPA codes and standards can be viewed at no cost at www.nfpa.org/docinfo.

NFPA 70®

National Electrical Code®

2020 Edition

This edition of *NFPA 70, National Electrical Code*, was prepared by the National Electrical Code Committee and acted on by NFPA at its June Association Technical Meeting held June 17–20, 2019, in San Antonio, TX. It was issued by the Standards Council on August 5, 2019, with an effective date of August 25, 2019, and supersedes all previous editions.

This *Code* was issued with Tentative Interim Amendments (TIAs) that impacted provisions in 210.52(C)(2), 240.67(C), 240.87(C), 725.121(C), and Annex D3. For more information on TIAs, see www.nfpa.org/70 and Section 5 of the *Regulations Governing the Development of NFPA Standards* available at www.nfpa.org/regs.

This edition of *NFPA 70* was approved as an American National Standard on August 25, 2019.

History and Development of the *National Electrical Code*®

The National Fire Protection Association has acted as sponsor of the *National Electrical Code* since 1911. The original *Code* document was developed in 1897 as a result of the united efforts of various insurance, electrical, architectural, and allied interests.

In accordance with the *Regulations Governing the Development of NFPA Standards*, a *National Electrical Code* first draft report containing proposed amendments to the 2017 *National Electrical Code* was published by NFPA in July 2018. This report recorded the actions of the various code-making panels and the correlating committee of the National Electrical Code Committee on each public input and first revision that had been made to revise the 2017 *Code*. The report was published at www.nfpa.org/70. Following the close of the public comment period, the code-making panels met, acted on each comment, and created some second revisions, which were reported to the correlating committee. NFPA published the *National Electrical Code* second draft report in April 2019, which recorded the actions of the code-making panels and the correlating committee on each public comment on the National Electrical Code Committee first draft report. The *National Electrical Code* first draft report and the *National Electrical Code* second draft report were presented to the 2019 June Association Technical Meeting for adoption.

NFPA has an Electrical Section that provides particular opportunity for NFPA members interested in electrical safety to become better informed and to contribute to the development of the *National Electrical Code* and other NFPA electrical standards. At the Electrical Section codes and standards review session held at the 2019 NFPA Conference and Expo, section members had the opportunity to discuss and review the report of the National Electrical Code Committee prior to the adoption of this edition of the *Code* by the association at its 2019 June Technical Meeting.

This 55th edition supersedes all other previous editions, supplements, and printings dated 1897, 1899, 1901, 1903, 1904, 1905, 1907, 1909, 1911, 1913, 1915, 1918, 1920, 1923, 1925, 1926, 1928, 1930, 1931, 1933, 1935, 1937, 1940, 1942, 1943, 1947, 1949, 1951, 1953, 1954, 1955, 1956, 1957, 1958, 1959, 1962, 1965, 1968, 1971, 1975, 1978, 1981, 1984, 1987, 1990, 1993, 1996, 1999, 2002, 2005, 2008, 2011, 2014, and 2017.

This *Code* is purely advisory as far as NFPA is concerned. It is made available for a wide variety of both public and private uses in the interest of life and property protection. These include both use in law and for regulatory purposes and use in private self-regulation and standardization activities such as insurance underwriting, building and facilities construction and management, and product testing and certification.

Contents

90	Introduction	70– 29	Part III.	Grounding Electrode System and Grounding Electrode Conductor	70– 120
Chapter 1 General					
100	Definitions	70– 32	Part IV.	Enclosure, Raceway, and Service Cable Connections	70– 125
Part I.	General	70– 32	Part V.	Bonding	70– 125
Part II.	Over 1000 Volts, Nominal	70– 41	Part VI.	Equipment Grounding and Equipment Grounding Conductors	70– 129
Part III.	Hazardous (Classified) Locations (CMP-14), ..	70– 42	Part VII.	Methods of Equipment Grounding Conductor Connections	70– 133
110	Requirements for Electrical Installations	70– 46	Part VIII.	Direct-Current Systems	70– 135
Part I.	General	70– 46	Part IX.	Instruments, Meters, and Relays	70– 136
Part II.	1000 Volts, Nominal, or Less	70– 50	Part X.	Grounding of Systems and Circuits of over 1000 Volts	70– 137
Part III.	Over 1000 Volts, Nominal	70– 52			
Part IV.	Tunnel Installations over 1000 Volts, Nominal ..	70– 55	Chapter 3 Wiring Methods and Materials		
Part V.	Manholes and Other Electrical Enclosures Intended for Personnel Entry	70– 56	300	General Requirements for Wiring Methods and Materials	70– 140
Chapter 2 Wiring and Protection					
200	Use and Identification of Grounded Conductors	70– 58	Part I.	General Requirements	70– 140
210	Branch Circuits	70– 60	Part II.	Requirements for over 1000 Volts, Nominal	70– 149
Part I.	General Provisions	70– 60	310	Conductors for General Wiring	70– 151
Part II.	Branch-Circuit Ratings	70– 65	Part I.	General	70– 151
Part III.	Required Outlets	70– 68	Part II.	Construction Specifications	70– 151
215	Feeders	70– 71	Part III.	Installation	70– 156
220	Branch-Circuit, Feeder, and Service Load Calculations	70– 73	311	Medium Voltage Conductors and Cable	70– 165
Part I.	General	70– 73	Part I.	General	70– 165
Part II.	Branch-Circuit Load Calculations	70– 74	Part II.	Construction Specifications	70– 165
Part III.	Feeder and Service Load Calculations	70– 76	Part III.	Installation	70– 167
Part IV.	Optional Feeder and Service Load Calculations	70– 79	Part IV.	Ampacities	70– 168
Part V.	Farm Load Calculations	70– 81	312	Cabinets, Cutout Boxes, and Meter Socket Enclosures	70– 179
225	Outside Branch Circuits and Feeders	70– 82	Part I.	Scope and Installation	70– 179
Part I.	General	70– 82	Part II.	Construction Specifications	70– 182
Part II.	Buildings or Other Structures Supplied by a Feeder(s) or Branch Circuit(s)	70– 85	314	Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Handhole Enclosures	70– 182
Part III.	Over 1000 Volts, ...	70– 86	Part I.	Scope and General	70– 182
230	Services	70– 88	Part II.	Installation	70– 183
Part I.	General	70– 88	Part III.	Construction Specifications	70– 189
Part II.	Overhead Service Conductors	70– 89	Part IV.	Pull and Junction Boxes, Conduit Bodies, and Handhole Enclosures for Use on Systems over 1000 Volts, Nominal	70– 189
Part III.	Underground Service Conductors	70– 90	320	Armored Cable: Type AC	70– 190
Part IV.	Service-Entrance Conductors	70– 91	Part I.	General	70– 190
Part V.	Service Equipment — General	70– 93	Part II.	Installation	70– 190
Part VI.	Service Equipment — Disconnecting Means	70– 93	Part III.	Construction Specifications	70– 191
Part VII.	Service Equipment — Overcurrent Protection ..	70– 95	322	Flat Cable Assemblies: Type FC	70– 191
Part VIII.	Services Exceeding 1000 Volts, Nominal	70– 96	Part I.	General	70– 191
240	Overcurrent Protection	70– 97	Part II.	Installation	70– 192
Part I.	General	70– 97	Part III.	Construction Specifications	70– 192
Part II.	Location	70– 101	324	Flat Conductor Cable: Type FCC	70– 192
Part III.	Enclosures	70– 104	Part I.	General	70– 192
Part IV.	Disconnecting and Guarding	70– 104	Part II.	Installation	70– 193
Part V.	Plug Fuses, Fuseholders, and Adapters	70– 104	Part III.	Construction Specifications	70– 194
Part VI.	Cartridge Fuses and Fuseholders	70– 104	326	Integrated Gas Spacer Cable: Type IGS	70– 194
Part VII.	Circuit Breakers	70– 105	Part I.	General	70– 194
Part VIII.	Supervised Industrial Installations	70– 107	Part II.	Installation	70– 194
Part IX.	Overcurrent Protection over 1000 Volts, Nominal	70– 108	Part III.	Construction Specifications	70– 195
242	Overvoltage Protection	70– 109	330	Metal-Clad Cable: Type MC	70– 195
Part I.	General	70– 109	Part I.	General	70– 195
Part II.	Surge-Protective Devices (SPDs), 1000 Volts or Less	70– 109	Part II.	Installation	70– 195
Part III.	Surge Arresters, Over 1000 Volts	70– 110	Part III.	Construction Specifications	70– 197
250	Grounding and Bonding	70– 111	332	Mineral-Insulated, Metal-Sheathed Cable: Type MI	70– 197
Part I.	General	70– 111	Part I.	General	70– 197
Part II.	System Grounding	70– 113	Part II.	Installation	70– 197

Part III.	Construction Specifications	70- 198	360	Flexible Metallic Tubing: Type FMT	70- 219
334	Nonmetallic-Sheathed Cable: Types NM and NMC	70- 198	Part I.	General	70- 219
Part I.	General	70- 198	Part II.	Installation	70- 220
Part II.	Installation	70- 198	Part III.	Construction Specifications	70- 220
Part III.	Construction Specifications	70- 200	362	Electrical Nonmetallic Tubing: Type ENT	70- 220
336	Power and Control Tray Cable: Type TC	70- 200	Part I.	General	70- 220
Part I.	General	70- 200	Part II.	Installation	70- 221
Part II.	Installation	70- 200	Part III.	Construction Specifications	70- 222
Part III.	Construction Specifications	70- 201	366	Auxiliary Gutters	70- 222
337	Type P Cable	70- 202	Part I.	General	70- 222
Part I.	General	70- 202	Part II.	Installation	70- 222
Part II.	Installation	70- 202	Part III.	Construction Specifications	70- 223
Part III.	Construction Specifications	70- 202	368	Busways	70- 224
338	Service-Entrance Cable: Types SE and USE	70- 202	Part I.	General Requirements	70- 224
Part I.	General	70- 202	Part II.	Installation	70- 224
Part II.	Installation	70- 203	Part III.	Construction	70- 225
Part III.	Construction Specifications	70- 203	Part IV.	Requirements for Over 1000 Volts, Nominal	70- 225
340	Underground Feeder and Branch-Circuit Cable: Type UF	70- 204	370	Cablebus	70- 226
Part I.	General	70- 204	Part I.	General	70- 226
Part II.	Installation	70- 204	Part II.	Installation	70- 226
Part III.	Construction Specifications	70- 204	Part III.	Construction Specifications	70- 227
342	Intermediate Metal Conduit: Type IMC	70- 204	372	Cellular Concrete Floor Raceways	70- 227
Part I.	General	70- 204	Part I.	General	70- 227
Part II.	Installation	70- 204	Part II.	Installations	70- 227
Part III.	Construction Specifications	70- 206	374	Cellular Metal Floor Raceways	70- 228
344	Rigid Metal Conduit: Type RMC	70- 206	Part I.	General	70- 228
Part I.	General	70- 206	Part II.	Installation	70- 228
Part II.	Installation	70- 206	Part III.	Construction Specifications	70- 229
Part III.	Construction Specifications	70- 207	376	Metal Wireways	70- 229
348	Flexible Metal Conduit: Type FMC	70- 207	Part I.	General	70- 229
Part I.	General	70- 207	Part II.	Installation	70- 229
Part II.	Installation	70- 208	Part III.	Construction Specifications	70- 230
350	Liquidtight Flexible Metal Conduit: Type LFMC	70- 209	378	Nonmetallic Wireways	70- 230
Part I.	General	70- 209	Part I.	General	70- 230
Part II.	Installation	70- 209	Part II.	Installation	70- 230
Part III.	Construction Specifications	70- 210	Part III.	Construction Specifications	70- 231
352	Rigid Polyvinyl Chloride Conduit: Type PVC	70- 210	380	Multioutlet Assembly	70- 231
Part I.	General	70- 210	Part I.	General	70- 231
Part II.	Installation	70- 210	Part II.	Installation	70- 231
Part III.	Construction Specifications	70- 212	382	Nonmetallic Extensions	70- 232
353	High Density Polyethylene Conduit: Type HDPE Conduit	70- 212	Part I.	General	70- 232
Part I.	General	70- 212	Part II.	Installation	70- 232
Part II.	Installation	70- 213	Part III.	Construction Specifications (Concealable Nonmetallic Extensions Only)	70- 233
Part III.	Construction Specifications	70- 213	384	Strut-Type Channel Raceway	70- 233
354	Nonmetallic Underground Conduit with Conductors: Type NUCC	70- 213	Part I.	General	70- 233
Part I.	General	70- 213	Part II.	Installation	70- 233
Part II.	Installation	70- 214	Part III.	Construction Specifications	70- 234
Part III.	Construction Specifications	70- 214	386	Surface Metal Raceways	70- 234
355	Reinforced Thermosetting Resin Conduit: Type RTRC	70- 215	Part I.	General	70- 234
Part I.	General	70- 215	Part II.	Installation	70- 234
Part II.	Installation	70- 215	Part III.	Construction Specifications	70- 235
Part III.	Construction Specifications	70- 216	388	Surface Nonmetallic Raceways	70- 235
356	Liquidtight Flexible Nonmetallic Conduit: Type LFNC	70- 217	Part I.	General	70- 235
Part I.	General	70- 217	Part II.	Installation	70- 235
Part II.	Installation	70- 217	Part III.	Construction Specifications	70- 236
Part III.	Construction Specifications	70- 218	390	Underfloor Raceways	70- 236
358	Electrical Metallic Tubing: Type EMT	70- 218	Part I.	General	70- 236
Part I.	General	70- 218	Part II.	Installation	70- 236
Part II.	Installation	70- 218	392	Cable Trays	70- 237
Part III.	Construction Specifications	70- 219	Part I.	General	70- 237
			Part II.	Installation	70- 237
			Part III.	Construction Specifications	70- 243
			393	Low-Voltage Suspended Ceiling Power Distribution Systems	70- 244
			Part I.	General	70- 244
			Part II.	Installation	70- 244

Part III.	Construction Specifications	70- 245
394	Concealed Knob-and-Tube Wiring	70- 246
Part I.	General	70- 246
Part II.	Installation	70- 246
Part III.	Construction Specifications	70- 246
396	Messenger-Supported Wiring	70- 247
Part I.	General	70- 247
Part II.	Installation	70- 247
398	Open Wiring on Insulators	70- 247
Part I.	General	70- 247
Part II.	Installation	70- 248
Part III.	Construction Specifications	70- 249
399	Outdoor Overhead Conductors over 1000 Volts	70- 249

Chapter 4 Equipment for General Use

400	Flexible Cords and Flexible Cables	70- 250
Part I.	General	70- 250
Part II.	Construction Specifications	70- 259
Part III.	Portable Cables Over 600 Volts, Nominal	70- 260
402	Fixture Wires	70- 260
404	Switches	70- 263
Part I.	Installation	70- 263
Part II.	Construction Specifications	70- 266
406	Receptacles, Cord Connectors, and Attachment Plugs (Caps)	70- 266
408	Switchboards, Switchgear, and Panelboards	70- 271
Part I.	General	70- 271
Part II.	Switchboards and Switchgear	70- 273
Part III.	Panelboards	70- 273
Part IV.	Construction Specifications	70- 274
409	Industrial Control Panels	70- 275
Part I.	General	70- 275
Part II.	Installation	70- 275
Part III.	Construction Specifications	70- 276
410	Luminaires, Lampholders, and Lamps	70- 277
Part I.	General	70- 277
Part II.	Luminaire Locations	70- 278
Part III.	Provisions at Luminaire Outlet Boxes, Canopies, and Pans	70- 279
Part IV.	Luminaire Supports	70- 279
Part V.	Grounding	70- 280
Part VI.	Wiring of Luminaires	70- 280
Part VII.	Construction of Luminaires	70- 282
Part VIII.	Installation of Lampholders	70- 282
Part IX.	Lamps and Auxiliary Equipment	70- 282
Part X.	Special Provisions for Flush and Recessed Luminaires	70- 282
Part XI.	Construction of Flush and Recessed Luminaires	70- 283
Part XII.	Special Provisions for Electric-Discharge Lighting Systems of 1000 Volts or Less	70- 283
Part XIII.	Special Provisions for Electric-Discharge Lighting Systems of More Than 1000 Volts	70- 284
Part XIV.	Lighting Track	70- 285
Part XV.	Decorative Lighting and Similar Accessories	70- 285
Part XVI.	Special Provisions for Horticultural Lighting Equipment	70- 285
411	Low-Voltage Lighting	70- 286
422	Appliances	70- 286
Part I.	General	70- 286
Part II.	Installation	70- 287
Part III.	Disconnecting Means	70- 289
Part IV.	Construction	70- 290
Part V.	Marking	70- 291
424	Fixed Electric Space-Heating Equipment	70- 291
Part I.	General	70- 291

Part II.	Installation	70- 291
Part III.	Control and Protection of Fixed Electric Space- Heating Equipment	70- 292
Part IV.	Marking of Heating Equipment	70- 293
Part V.	Electric Space-Heating Cables	70- 293
Part VI.	Duct Heaters	70- 295
Part VII.	Resistance-Type Boilers	70- 295
Part VIII.	Electrode-Type Boilers	70- 296
Part IX.	Electric Radiant Heating Panels and Heating Panel Sets	70- 297
Part X.	Low-Voltage Fixed Electric Space-Heating Equipment	70- 298
425	Fixed Resistance and Electrode Industrial Process Heating Equipment	70- 299
Part I.	General	70- 299
Part II.	Installation	70- 299
Part III.	Control and Protection of Fixed Industrial Process Heating Equipment	70- 299
Part IV.	Marking of Heating Equipment	70- 301
Part V.	Fixed Industrial Process Duct Heaters	70- 301
Part VI.	Fixed Industrial Process Resistance-Type Boilers	70- 301
Part VII.	Fixed Industrial Process Electrode-Type Boilers	70- 302
426	Fixed Outdoor Electric Deicing and Snow- Melting Equipment	70- 303
Part I.	General	70- 303
Part II.	Installation	70- 303
Part III.	Resistance Heating Elements	70- 303
Part IV.	Impedance Heating	70- 304
Part V.	Skin-Effect Heating	70- 304
Part VI.	Control and Protection	70- 305
427	Fixed Electric Heating Equipment for Pipelines and Vessels	70- 305
Part I.	General	70- 305
Part II.	Installation	70- 306
Part III.	Resistance Heating Elements	70- 306
Part IV.	Impedance Heating	70- 306
Part V.	Induction Heating	70- 307
Part VI.	Skin-Effect Heating	70- 307
Part VII.	Control and Protection	70- 307
430	Motors, Motor Circuits, and Controllers	70- 308
Part I.	General	70- 308
Part II.	Motor Circuit Conductors	70- 313
Part III.	Motor and Branch-Circuit Overload Protection	70- 315
Part IV.	Motor Branch-Circuit Short-Circuit and Ground-Fault Protection	70- 318
Part V.	Motor Feeder Short-Circuit and Ground-Fault Protection	70- 321
Part VI.	Motor Control Circuits	70- 321
Part VII.	Motor Controllers	70- 323
Part VIII.	Motor Control Centers	70- 324
Part IX.	Disconnecting Means	70- 325
Part X.	Adjustable-Speed Drive Systems	70- 327
Part XI.	Over 1000 Volts, Nominal	70- 329
Part XII.	Protection of Live Parts — All Voltages	70- 330
Part XIII.	Grounding — All Voltages	70- 330
Part XIV.	Tables	70- 330
440	Air-Conditioning and Refrigerating Equipment	70- 335
Part I.	General	70- 335
Part II.	Disconnecting Means	70- 336
Part III.	Branch-Circuit Short-Circuit and Ground-Fault Protection	70- 337
Part IV.	Branch-Circuit Conductors	70- 338
Part V.	Controllers for Motor-Compressors	70- 339
Part VI.	Motor-Compressor and Branch-Circuit Overload Protection	70- 339
Part VII.	Provisions for Room Air Conditioners	70- 340

445	Generators	70– 340	Part VI.	Communications, Signaling Systems, Data Systems, Fire Alarm Systems, and Systems Less Than 120 Volts, Nominal	70– 450
450	Transformers and Transformer Vaults (Including Secondary Ties)	70– 342	Part VII.	Isolated Power Systems	70– 451
Part I.	General	70– 342	518	Assembly Occupancies	70– 452
Part II.	Specific Provisions Applicable to Different Types of Transformers	70– 346	520	Theaters, Audience Areas of Motion Picture and Television Studios, Performance Areas, and Similar Locations	70– 453
Part III.	Transformer Vaults	70– 348	Part I.	General	70– 453
455	Phase Converters	70– 349	Part II.	Fixed Stage Switchboards	70– 454
Part I.	General	70– 349	Part III.	Fixed Stage Equipment Other Than Switchboards	70– 455
Part II.	Specific Provisions Applicable to Different Types of Phase Converters	70– 350	Part IV.	Portable Switchboards on Stage	70– 457
460	Capacitors	70– 350	Part V.	Portable Stage Equipment Other Than Switchboards	70– 459
Part I.	1000 Volts, Nominal, and Under	70– 350	Part VI.	Dressing Rooms, Dressing Areas, and Makeup Areas	70– 460
Part II.	Over 1000 Volts, Nominal	70– 351	Part VII.	Equipment Grounding Conductor	70– 460
470	Resistors and Reactors	70– 352	522	Control Systems for Permanent Amusement Attractions	70– 461
Part I.	1000 Volts, Nominal, and Under	70– 352	Part I.	General	70– 461
Part II.	Over 1000 Volts, Nominal	70– 352	Part II.	Control Circuits	70– 461
480	Storage Batteries	70– 352	Part III.	Control Circuit Wiring Methods	70– 461
490	Equipment Over 1000 Volts, Nominal	70– 355	525	Carnivals, Circuses, Fairs, and Similar Events	70– 462
Part I.	General	70– 355	Part I.	General Requirements	70– 462
Part II.	Equipment — Specific Provisions	70– 355	Part II.	Power Sources	70– 463
Part III.	Equipment — Switchgear and Industrial Control Assemblies	70– 357	Part III.	Wiring Methods	70– 463
Part IV.	Mobile and Portable Equipment	70– 359	Part IV.	Equipment Grounding and Bonding	70– 464
Part V.	Electrode-Type Boilers	70– 360	530	Motion Picture and Television Studios and Similar Locations	70– 464
Chapter 5 Special Occupancies			Part I.	General	70– 464
500	Hazardous (Classified) Locations, Classes I, II, and III, Divisions 1 and 2	70– 361	Part II.	Stage or Set	70– 465
501	Class I Locations	70– 368	Part III.	Dressing Rooms	70– 467
Part I.	General	70– 368	Part IV.	Viewing, Cutting, and Patching Tables	70– 467
Part II.	Wiring	70– 368	Part V.	Cellulose Nitrate Film Storage Vaults	70– 467
Part III.	Equipment	70– 373	Part VI.	Substations	70– 467
502	Class II Locations	70– 377	540	Motion Picture Projection Rooms	70– 467
Part I.	General	70– 377	Part I.	General	70– 467
Part II.	Wiring	70– 378	Part II.	Equipment and Projectors of the Professional Type	70– 467
Part III.	Equipment	70– 380	Part III.	Nonprofessional Projectors	70– 468
503	Class III Locations	70– 383	Part IV.	Audio Signal Processing, Amplification, and Reproduction Equipment	70– 468
Part I.	General	70– 383	545	Manufactured Buildings and Relocatable Structures	70– 468
Part II.	Wiring	70– 383	Part I.	General	70– 468
Part III.	Equipment	70– 384	Part II.	Relocatable Structures	70– 469
504	Intrinsically Safe Systems	70– 386	547	Agricultural Buildings	70– 470
505	Zone 0, 1, and 2 Locations	70– 388	550	Mobile Homes, Manufactured Homes, and Mobile Home Parks	70– 472
506	Zone 20, 21, and 22 Locations for Combustible Dusts or Ignitable Fibers/Flyings	70– 402	Part I.	General	70– 472
510	Hazardous (Classified) Locations — Specific	70– 408	Part II.	Mobile and Manufactured Homes	70– 473
511	Commercial Garages, Repair and Storage	70– 409	Part III.	Services and Feeders	70– 479
513	Aircraft Hangars	70– 411	551	Recreational Vehicles and Recreational Vehicle Parks	70– 480
514	Motor Fuel Dispensing Facilities	70– 414	Part I.	General	70– 480
515	Bulk Storage Plants	70– 420	Part II.	Combination Electrical Systems	70– 481
516	Spray Application, Dipping, Coating, and Printing Processes Using Flammable or Combustible Materials	70– 423	Part III.	Other Power Sources	70– 482
Part I.	General	70– 423	Part IV.	Nominal 120-Volt or 120/240-Volt Systems	70– 483
Part II.	Open Containers	70– 424	Part V.	Factory Tests	70– 489
Part III.	Spray Application Processes	70– 424	Part VI.	Recreational Vehicle Parks	70– 489
Part IV.	Spray Application Operations in Membrane Enclosures	70– 431	552	Park Trailers	70– 491
Part V.	Printing, Dipping, and Coating Processes	70– 432	Part I.	General	70– 491
517	Health Care Facilities	70– 434	Part II.	Low-Voltage Systems	70– 492
Part I.	General	70– 434	Part III.	Combination Electrical Systems	70– 493
Part II.	Wiring and Protection	70– 437	Part IV.	Nominal 120-Volt or 120/240-Volt Systems	70– 493
Part III.	Essential Electrical System (EES)	70– 440	Part V.	Factory Tests	70– 500
Part IV.	Inhalation Anesthetizing Locations	70– 447			
Part V.	X-Ray Installations	70– 449			

555	Marinas, Boatyards, Floating Buildings, and Commercial and Noncommercial Docking Facilities	70- 500
Part I.	General	70- 500
Part II.	Marinas, Boatyards, and Docking Facilities	70- 502
Part III.	Floating Buildings	70- 504
590	Temporary Installations	70- 504

Chapter 6 Special Equipment

600	Electric Signs and Outline Lighting	70- 508
Part I.	General	70- 508
Part II.	Field-Installed Skeleton Tubing, Outline Lighting, and Secondary Wiring	70- 512
604	Manufactured Wiring Systems	70- 514
605	Office Furnishings	70- 515
610	Cranes and Hoists	70- 516
Part I.	General	70- 516
Part II.	Wiring	70- 517
Part III.	Contact Conductors	70- 519
Part IV.	Disconnecting Means	70- 520
Part V.	Overcurrent Protection	70- 520
Part VI.	Control	70- 521
Part VII.	Grounding and Bonding	70- 521
620	Elevators, Dumbwaiters, Escalators, Moving Walks, Platform Lifts, and Stairway Chairlifts	70- 521
Part I.	General	70- 521
Part II.	Conductors	70- 523
Part III.	Wiring	70- 525
Part IV.	Installation of Conductors	70- 527
Part V.	Traveling Cables	70- 528
Part VI.	Disconnecting Means and Control	70- 528
Part VII.	Overcurrent Protection	70- 530
Part VIII.	Machine Rooms, Control Rooms, Machinery Spaces, and Control Spaces	70- 530
Part IX.	Grounding and Bonding	70- 530
Part X.	Emergency and Standby Power Systems	70- 531
625	Electric Vehicle Power Transfer System	70- 531
Part I.	General	70- 531
Part II.	Equipment Construction	70- 532
Part III.	Installation	70- 532
Part IV.	Wireless Power Transfer Equipment	70- 535
626	Electrified Truck Parking Spaces	70- 535
Part I.	General	70- 535
Part II.	Electrified Truck Parking Space Electrical Wiring Systems	70- 536
Part III.	Electrified Truck Parking Space Supply Equipment	70- 537
Part IV.	Transport Refrigerated Units (TRUs)	70- 539
630	Electric Welders	70- 540
Part I.	General	70- 540
Part II.	Arc Welders	70- 540
Part III.	Resistance Welders	70- 541
Part IV.	Welding Cable	70- 541
640	Audio Signal Processing, Amplification, and Reproduction Equipment	70- 542
Part I.	General	70- 542
Part II.	Permanent Audio System Installations	70- 544
Part III.	Portable and Temporary Audio System Installations	70- 545
645	Information Technology Equipment	70- 546
646	Modular Data Centers	70- 549
Part I.	General	70- 549
Part II.	Equipment	70- 552
Part III.	Lighting	70- 552
Part IV.	Workspace	70- 553
647	Sensitive Electronic Equipment	70- 553
650	Pipe Organs	70- 554

660	X-Ray Equipment	70- 555
Part I.	General	70- 555
Part II.	Control	70- 556
Part III.	Transformers and Capacitors	70- 556
Part IV.	Guarding and Grounding	70- 557
665	Induction and Dielectric Heating Equipment	70- 557
Part I.	General	70- 557
Part II.	Guarding, Grounding, and Labeling	70- 558
668	Electrolytic Cells	70- 558
669	Electroplating	70- 560
670	Industrial Machinery	70- 561
675	Electrically Driven or Controlled Irrigation Machines	70- 562
Part I.	General	70- 562
Part II.	Center Pivot Irrigation Machines	70- 564
680	Swimming Pools, Fountains, and Similar Installations	70- 564
Part I.	General	70- 564
Part II.	Permanently Installed Pools	70- 567
Part III.	Storable Pools, Storable Spas, Storable Hot Tubs, and Storable Immersion Pools	70- 573
Part IV.	Spas, Hot Tubs, and Permanently Installed Immersion Pools	70- 574
Part V.	Fountains	70- 576
Part VI.	Pools and Tubs for Therapeutic Use	70- 578
Part VII.	Hydromassage Bathtubs	70- 578
Part VIII.	Electrically Powered Pool Lifts	70- 579
682	Natural and Artificially Made Bodies of Water	70- 579
Part I.	General	70- 579
Part II.	Installation	70- 580
Part III.	Grounding and Bonding	70- 580
685	Integrated Electrical Systems	70- 581
Part I.	General	70- 581
Part II.	Orderly Shutdown	70- 582
690	Solar Photovoltaic (PV) Systems	70- 582
Part I.	General	70- 582
Part II.	Circuit Requirements	70- 583
Part III.	Disconnecting Means	70- 587
Part IV.	Wiring Methods and Materials	70- 588
Part V.	Grounding and Bonding	70- 590
Part VI.	Marking	70- 592
Part VII.	Connection to Other Sources	70- 592
Part VIII.	Energy Storage Systems	70- 592
691	Large-Scale Photovoltaic (PV) Electric Supply Stations	70- 593
692	Fuel Cell Systems	70- 594
Part I.	General	70- 594
Part II.	Circuit Requirements	70- 594
Part III.	Disconnecting Means	70- 595
Part IV.	Wiring Methods	70- 595
Part V.	Grounding	70- 595
Part VI.	Marking	70- 595
Part VII.	Connection to Other Circuits	70- 595
694	Wind Electric Systems	70- 596
Part I.	General	70- 596
Part II.	Circuit Requirements	70- 597
Part III.	Disconnecting Means	70- 597
Part IV.	Wiring Methods	70- 599
Part V.	Grounding and Bonding	70- 599
Part VI.	Marking	70- 599
Part VII.	Connection to Other Sources	70- 599
695	Fire Pumps	70- 600

Chapter 7 Special Conditions

700	Emergency Systems	70- 605
Part I.	General	70- 605
Part II.	Circuit Wiring	70- 607

12(A)	PLFA Alternating-Current Power Source Limitations	70– 709	Informative Annex G: Supervisory Control and Data Acquisition (SCADA)	70– 833
	Informative Annex A: Product Safety Standards	70– 710	Informative Annex H: Administration and Enforcement	70– 834
	Informative Annex B: Application Information for Ampacity Calculation	70– 716	Informative Annex I: Recommended Tightening Torque Tables from UL Standard 486A-486B	70– 840
	Informative Annex C: Conduit, Tubing, and Cable Tray Fill Tables for Conductors and Fixture Wires of the Same Size	70– 729	Informative Annex J: ADA Standards for Accessible Design	70– 842
	Informative Annex D: Examples	70– 815	Index	70– 845
	Informative Annex E: Types of Construction	70– 829		
	Informative Annex F: Availability and Reliability for Critical Operations Power Systems; and Development and Implementation of Functional Performance Tests (FPTs) for Critical Operations Power Systems	70– 831		

NATIONAL ELECTRICAL CODE COMMITTEE

These lists represent the membership at the time the Committee was balloted on the final text of this edition. Since that time, changes in the membership may have occurred. A key to classifications is found at the back of this document.

Correlating Committee on National Electrical Code®

Michael J. Johnston, *Chair*

National Electrical Contractors Association, MD [IM]

Mark W. Earley, *Secretary (Nonvoting)*

National Fire Protection Association, MA

Sarah D. Caldwell, *Technical Committee Administrator (Nonvoting)*

National Fire Protection Association, MA

James E. Brunssen, Telcordia Technologies (Ericsson), NJ [UT]

Rep. Alliance for Telecommunications Industry Solutions

Kevin L. Dressman, U.S. Department of Energy, MD [U]

Palmer L. Hickman, Electrical Training Alliance, MD [L]

Rep. International Brotherhood of Electrical Workers

David L. Hittinger, Independent Electrical Contractors of Greater Cincinnati, OH [IM]

Rep. Independent Electrical Contractors, Inc.

Richard A. Holub, The DuPont Company, Inc., DE [U]

Rep. American Chemistry Council

John R. Kovacik, UL LLC, IL [RT]

Alan Manche, Schneider Electric, KY [M]

Roger D. McDaniel, Georgia Power Company, GA [UT]

Rep. Electric Light & Power Group/EEI

David A. Williams, Delta Charter Township, MI [E]

Rep. International Association of Electrical Inspectors

Alternates

Lawrence S. Ayer, Biz Com Electric, Inc., OH [IM]

(Alt. to David L. Hittinger)

Roland E. Deike, Jr., CenterPoint Energy, Inc., TX [UT]

(Alt. to Roger D. McDaniel)

James T. Dollard, Jr., IBEW Local Union 98, PA [L]

(Alt. to Palmer L. Hickman)

Ernest J. Gallo, Telcordia Technologies (Ericsson), NJ [UT]

(Alt. to James E. Brunssen)

Robert A. McCullough, Tuckerton, NJ [E]

(Alt. to David A. Williams)

Robert D. Osborne, UL LLC, NC [RT]

(Alt. to John R. Kovacik)

Christine T. Porter, Intertek Testing Services, WA [RT]

(Voting Alt.)

George A. Straniero, AFC Cable Systems, Inc., NJ [M]

(Voting Alt.)

Nonvoting

Timothy J. Pope, Canadian Standards Association, Canada [SE]

Rep. CSA/Canadian Electrical Code Committee

William R. Drake, Fairfield, CA [M]

(Member Emeritus)

Mark W. Earley, NFPA Staff Liaison

D. Harold Ware, Libra Electric Company, OK [IM]

(Member Emeritus)

Code-Making Panel No. 1

Articles 90, 100, 110, Chapter 9, Table 10, Annex A, Annex H, Annex I, and Annex J

Kenneth P. Boyce, *Chair*
UL LLC, IL [RT]

Louis A. Barrios, Shell Global Solutions, TX [U]
Rep. American Chemistry Council

Roland E. Deike, Jr., CenterPoint Energy, Inc., TX [UT]
Rep. Electric Light & Power Group/EEI

Ernest J. Gallo, Telcordia Technologies (Ericsson), NJ [U]
Rep. Alliance for Telecommunications Industry Solutions

Palmer L. Hickman, Electrical Training Alliance, MD [L]
Rep. International Brotherhood of Electrical Workers

David L. Hittinger, Independent Electrical Contractors of Greater Cincinnati, OH [IM]
Rep. Independent Electrical Contractors, Inc.

Donald R. Iverson, National Electrical Manufacturers Association, MI [M]
Rep. National Electrical Manufacturers Association

James F. Pierce, Intertek Testing Services, OR [RT]

Harry J. Sassaman, Forest Electric Corporation, NJ [IM]
Rep. National Electrical Contractors Association

Kent A. Sayler, P2S Inc., CA [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Mohinder P. Sood, City of Alexandria, VA [E]
Rep. International Association of Electrical Inspectors

Alternates

James E. Brunssen, Telcordia Technologies (Ericsson), NJ [U]
(Alt. to Ernest J. Gallo)

Mark Christian, Electrical Training Alliance, TN [L]
(Alt. to Palmer L. Hickman)

Jon Coulimore, JC Electric, Inc., WA [IM]
(Alt. to David L. Hittinger)

Timothy Garland, Keene State College, NH [U]
(Voting Alt.)

Larry Geyer, Quality Electric Inc., ID [IM]
(Alt. to Harry J. Sassaman)

Joseph Marquardt, ExxonMobil Production Company, TX [U]
(Alt. to Louis A. Barrios)

Roger D. McDaniel, Georgia Power Company, GA [UT]
(Alt. to Roland E. Deike, Jr.)

Kenneth L. McKinney, Jr., UL LLC, NC [RT]
(Alt. to Kenneth P. Boyce)

Donald R. Offerdahl, Intertek Testing Services, ND [RT]
(Alt. to James F. Pierce)

Michael C. Stone, National Electrical Manufacturers Association, CA [M]
(Alt. to Donald R. Iverson)

Frank E. Tyler, The DuPont Company, Inc., DE [U]
(Alt. to Kent A. Sayler)

Charles Valaer, City Of Glendale California, CA [E]
(Alt. to Mohinder P. Sood)

Nonvoting

Ark Tsisserev, AES Engineering, Canada [SE]
Rep. CSA/Canadian Electrical Code Committee

Code-Making Panel No. 2

Articles 210, 220, Annex D, Examples D1 through D6

Mark R. Hilbert, *Chair*MR Hilbert Electrical Inspections & Training, NH [E]
Rep. International Association of Electrical Inspectors

Mathther Abbassi, New York City Department Of Buildings, NY [E]

Charles L. Boynton, The DuPont Company, Inc., TX [U]
Rep. American Chemistry CouncilDaniel Buuck, National Association of Home Builders (NAHB), DC [U]
Rep. National Association of Home Builders

Steve Campolo, Leviton Manufacturing Company, Inc., NY [M]

Thomas A. Domitrovich, Eaton Corporation, MO [M]
Rep. National Electrical Manufacturers AssociationNehad El-Sherif, Saskatoon, SKCanada [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Thomas L. Harman, University of Houston-Clear Lake, TX [SE]

David W. Johnson, CenTex IEC, TX [IM]
Rep. Independent Electrical Contractors, Inc.

Alan Manche, Schneider Electric, KY [M]

John McCamish, NECA IBEW Electrical Training Center, OR [L]
Rep. International Brotherhood of Electrical WorkersChristopher J. Pavese, Duke Energy, KY [UT]
Rep. Electric Light & Power Group/EEI

Frederick P. Reyes, UL LLC, NY [RT]

Michael Weaver, M&W Electric, OR [IM]
Rep. National Electrical Contractors Association

Alternates

William B. Crist, Jr., IES Residential Inc., TX [IM]
(Alt. to David W. Johnson)Andrew Kriegman, Leviton Manufacturing Company, Inc., NY [M]
(Alt. to Steve Campolo)Brett Larson, Schneider Electric, IA [M]
(Alt. to Alan Manche)Cesar Lujan, National Association of Home Builders (NAHB), DC [U]
(Alt. to Daniel Buuck)Roger D. McDaniel, Georgia Power Company, GA [UT]
(Alt. to Christopher J. Pavese)Daniel J. Naughton, JATC of Greater Boston, MA [L]
(Alt. to John McCamish)Fred Neubauer, Neubauer Electric Inc., CA [IM]
(Alt. to Michael Weaver)Robert D. Osborne, UL LLC, NC [RT]
(Alt. to Frederick P. Reyes)Fernando E. Pacheco, Methanex Chile SA, TX [U]
(Alt. to Charles L. Boynton)Brian E. Rock, Hubbell Incorporated, CT [M]
(Alt. to Thomas A. Domitrovich)Joseph J. Wages, Jr., International Association of Electrical Inspectors, TX [E]
(Alt. to Mark R. Hilbert)

Nonvoting

Douglas A. Lee, U.S. Consumer Product Safety Commission, MD [C]
Rep. U.S. Consumer Product Safety CommissionAndrew M. Trotta, U.S. Consumer Product Safety Commission, MD [C]
Rep. U.S. Consumer Product Safety Commission

Code-Making Panel No. 3

Articles 300, 590, 720, 725, 727, 728, 760, and Chapter 9, Tables 11(A) and (B), and Tables 12(A) and (B)

Robert A. Jones, *Chair*

Independent Electrical Contractors, Inc., TX [IM]

Rep. Independent Electrical Contractors, Inc.

Richard S. Anderson, RTKL Associates Inc., VA [M]
Rep. Building Industry Consulting Services International**Douglas P. Bassett**, XFINITY Home, FL [IM]
Rep. Electronic Security Association**Larry G. Brewer**, Intertek Testing Services, NC [RT]**Steven D. Burlison**, Duke Energy, FL [UT]
Rep. Electric Light & Power Group/EEI**Paul J. Casparro**, Scranton Electricians JATC, PA [L]
Rep. International Brotherhood of Electrical Workers**Shane M. Clary**, Bay Alarm Company, CA [M]
Rep. Automatic Fire Alarm Association, Inc.**Raymond W. Horner**, Allied Tube & Conduit, IL [M]
Rep. National Electrical Manufacturers Association**Randolph J. Ivans**, UL LLC, NY [RT]**Chad M. Jones**, Cisco Systems, OH [M]**T. David Mills**, T. David Mills Associates, LLC, GA [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.**Steven J. Owen**, Steven J. Owen, Inc., AL [IM]
Rep. Associated Builders & Contractors**David A. Pace**, Olin Corporation, AL [U]
Rep. American Chemistry Council**Charles J. Palmieri**, Town of Norwell, MA [E]
Rep. International Association of Electrical Inspectors**John E. Sleights**, Travelers Insurance Company, CT [I]**George Allan Zimmerman**, CME Consulting, Inc., CA [SE]
Rep. Ethernet Alliance

Alternates

Adam D. Corbin, Corbin Electrical Services, Inc., NJ [IM]
(Alt. to Robert A. Jones)**Michael J. Farrell III**, Lucas County Building Regulation, MI [L]
(Alt. to Paul J. Casparro)**Joel Goergen**, Cisco Systems, Inc., CA [M]
(Alt. to Chad M. Jones)**Ward Judson**, Pentair/ERICO International Corporation, OH [M]
(Alt. to Richard S. Anderson)**Kyle Krueger**, National Electrical Contractors- Milwaukee Chapter, WI [IM]
(Voting Alt.)**John Lupacchino**, Gaylor Electric Incorporated, IN [IM]
(Alt. to Steven J. Owen)**Jack McNamara**, Bosch Security Systems, NY [M]
(Alt. to Shane M. Clary)**Timothy J. Mikloiche**, Town of West Hartford, CT [E]
(Alt. to Charles J. Palmieri)**Mark C. Ode**, UL LLC, AZ [RT]
(Alt. to Randolph J. Ivans)**Christopher J. Pavese**, Duke Energy, KY [UT]
(Alt. to Steven D. Burlison)**Dmitriy V. Plotnikov**, Intertek Testing Services, NJ [RT]
(Alt. to Larry G. Brewer)**Rick D. Sheets**, AT&T Digital Life, TX [IM]
(Alt. to Douglas P. Bassett)**George A. Straniero**, AFC Cable Systems, Inc., NJ [M]
(Alt. to Raymond W. Horner)**William C. Szeto**, McKinney, TX [U]
(Alt. to T. David Mills)**Rebecca S. Templet**, Shell Chemical, LA [U]
(Alt. to David A. Pace)

Nonvoting

Edward C. Lawry, Oregon, WI [E]
(Member Emeritus)

Code-Making Panel No. 4

Articles 690, 692, 694, 705

James J. Rogers, Chair

Towns of Oak Bluffs, Tisbury, West Tisbury, MA [E]
Rep. International Association of Electrical Inspectors

William F. Brooks, Brooks Engineering, CA [U]
Rep. Photovoltaic Industry Code Council

Bill Brown, Schneider Electric, TN [M]
Rep. National Electrical Manufacturers Association

Thomas E. Buchal, Intertek Testing Services, NY [RT]

James G. Cialdea, CE Power Engineered Services, LLC, MA [IM]
Rep. InterNational Electrical Testing Association

Timothy M. Croushore, FirstEnergy Technologies, PA [UT]
Rep. Electric Light & Power Group/EEI

Jason M. Fisher, Tesla Inc., VA [U]
Rep. Solar Energy Industries Association

Todd Fries, HellermannTyton, WI [M]

Mark D. Gibbs, URS|CH2M Oak Ridge LLC (UCOR), TN [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Rebekah Wharton Hren, IPPNC LLC, NC [U]
Rep. Solar Energy International

Lee M. Kraemer, First Solar, OH [M]
Rep. Large-Scale Solar Association

Matthew Paiss, San Jose Fire Department, CA [L]
Rep. International Association of Fire Fighters

Irozenell Pruitt, The DuPont Company, Inc., TX [U]
Rep. American Chemistry Council

Duke W. Schamel, Electrical Service Solutions, Inc., CA [IM]
Rep. Independent Electrical Contractors, Inc.

Ronald J. Toomer, Toomer Electrical Company Inc., LA [IM]
Rep. National Electrical Contractors Association

Wendell R. Whistler, IBEW 1547, OR [L]

Robert H. Wills, Intergrid, LLC, NH [U]
Rep. American Wind Energy Association

Timothy P. Zgonena, UL LLC, IL [RT]

Alternates

John S. Berdner, Solarcowboyz, CA [U]
(Alt. to William F. Brooks)

Ron Borowski, Eaton Corporation, WI [M]
(Alt. to Bill Brown)

Ward I. Bower, Solar Energy Industries Association, NM [U]
(Alt. to Jason M. Fisher)

Mark Gillespie, TMI Electric, OH [IM]
(Alt. to Duke W. Schamel)

Anthony Granato, Manchester Fire Rescue EMS, CT [L]
(Alt. to Matthew Paiss)

Howard Liu, Intertek Testing Services, NY [RT]
(Alt. to Thomas E. Buchal)

Brian Mehalic, Winston-Salem, NC [U]
(Alt. to Rebekah Wharton Hren)

Harold C. Ohde, IBEW 134/Electrical Joint Apprenticeship
Training & Trust, IL [L]
(Alt. to Wendell R. Whistler)

Isaac Opalinsky, Sunpower Corporation, MD [M]
(Alt. to Lee M. Kraemer)

Rhonda Parkhurst, City of Palo Alto, CA [E]
(Alt. to James J. Rogers)

Robert W. Preus, National Renewable Energy Lab, CO [U]
(Alt. to Robert H. Wills)

Kent Whitfield, Underwriters Laboratories, CA [RT]
(Alt. to Timothy P. Zgonena)

Leo Ziemann, Florida Power & Light (Nextera Energy), FL [UT]
(Alt. to Timothy M. Croushore)

Nonvoting

Stephen W. Douglas, QPS Evaluation Services Inc., Canada [SE]
Rep. CSA/Canadian Electrical Code Committee

Code-Making Panel No. 5

Articles 200, 250

Nathan Philips, *Chair*

Integrated Electronic Systems, OR [IM]

Rep. National Electrical Contractors Association

Paul W. Abernathy, Encore Wire Corporation, TX [M]
Rep. The Aluminum Association, Inc.

Joseph F. Andre, Steel Tube Institute, WA [M]
Rep. Steel Tube Institute of North America

Gary A. Beckstrand, Utah Electrical JATC, UT [L]
Rep. International Brotherhood of Electrical Workers

Trevor N. Bowmer, Telcordia (Ericsson), NJ [U]
Rep. Alliance for Telecommunications Industry Solutions

David Brender, Copper Development Association, Inc., NY [M]
Rep. Copper Development Association Inc.

Paul Dobrowsky, Innovative Technology Services, NY [U]
Rep. American Chemistry Council

David A. Gerstetter, UL LLC, IL [RT]

G. Scott Harding, F. B. Harding, Inc., MD [IM]
Rep. Independent Electrical Contractors, Inc.

Joseph Harding, Power Tool Institute, OH [M]

Daleep C. Mohla, DCM Electrical Consulting Services, Inc., TX [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Mike O'Meara, Arizona Public Service Company, AZ [UT]
Rep. Electric Light & Power Group/EEI

William A. Pancake, III, CAP Government, FL [E]
Rep. International Association of Electrical Inspectors

Christine T. Porter, Intertek Testing Services, WA [RT]

Nick Sasso, State of Wyoming, WY [E]

Gregory J. Steinman, Thomas & Betts Corporation, TN [M]
Rep. National Electrical Manufacturers Association

Alternates

Larry Albert, Stanley Black And Decker, MD [M]
(Alt. to Joseph Harding)

Derrick L. Atkins, Minneapolis Electrical JATC, MN [L]
(Alt. to Gary A. Beckstrand)

Kenneth S. Crawford, Chemours Company, WV [U]
(Alt. to Paul Dobrowsky)

Joseph P. DeGregoria, UL LLC, NY [RT]
(Alt. to David A. Gerstetter)

Raymond Dunnigan, Intertek, NY [RT]
(Alt. to Christine T. Porter)

Ernest J. Gallo, Telcordia Technologies (Ericsson), NJ [U]
(Voting Alt.)

Bobby J. Gray, Hoydar/Buck, Inc., WA [IM]
(Alt. to Nathan Philips)

Buster Grissett, Mississippi Power Company, MS [UT]
(Alt. to Mike O'Meara)

Raymond W. Horner, Allied Tube & Conduit, IL [M]
(Alt. to Joseph F. Andre)

Ronald Lai, Burndy LLC, NH [M]
(Alt. to Gregory J. Steinman)

Karin Manfredi, AFC Cable Systems/Atkore, MA [M]
(Alt. to Paul W. Abernathy)

Richard M. O'Brien, IAEI, NV [E]
(Alt. to William A. Pancake, III)

David J. Picatti, Picatti Bros. Inc., DBA Industrial Service & Electric, WA [IM]
(Alt. to G. Scott Harding)

Phil Simmons, Simmons Electrical Services, WA [M]
(Alt. to David Brender)

Nonvoting

Robert A. Nelson, Canadian Standards Association, Canada [RT]

Code-Making Panel No. 6

Articles 310, 311, 320, 322, 324, 326, 328, 330, 332, 334, 336, 337, 338, 340, 382, 394, 396, 398, 399, 400, 402,

Chapter 9, Tables 5 through 9, Annex B and Example D7

Susan Newman Searce, *Chair*

City of Humboldt, TN, TN [E]

Rep. International Association of Electrical Inspectors

Todd Crisman, IBEW Local 22 JATC, NE [L]

Rep. International Brotherhood of Electrical Workers

Joseph W. Cross, Eastman Chemical Company, TN [U]

Rep. American Chemistry Council

Timothy Earl, GBH International, MI [M]

Rep. The Vinyl Institute

Christel K. Hunter, Cerro Wire, NV [M]

Rep. The Aluminum Association, Inc.

Gerald W. Kent, Kent Electric & Plumbing Systems, TX [IM]

Rep. Independent Electrical Contractors, Inc.

Charles David Mercier, Southwire Company, GA [M]

Rep. National Electrical Manufacturers Association

Dennis A. Nielsen, Lawrence Berkeley National Laboratory, CA [U]

Rep. Institute of Electrical & Electronics Engineers, Inc.

Michael Thomas Porcaro, National Grid, MA [UT]

Rep. Electric Light & Power Group/EEI

Kenneth Riedl, Intertek Testing Services, NY [RT]

Rep. Intertek Testing Services

Susan L. Stene, UL LLC, CA [RT]

George A. Straniero, AFC Cable Systems, Inc., NJ [M]

Rep. Copper Development Association Inc.

Wesley L. Wheeler, National Electrical Contractors Association, MD [IM]

Rep. National Electrical Contractors Association

Alternates

David Carroll, Florida Power And Light, FL [UT]

(Alt. to Michael Thomas Porcaro)

Chris J. Fahrenthold, Facility Solutions Group, TX [IM]

(Alt. to Gerald W. Kent)

Samuel B. Friedman, General Cable Corporation, RI [M]

(Alt. to Charles David Mercier)

Herman J. Hall, Austin, TX [M]

(Alt. to Timothy Earl)

Samuel R. La Dart, City of Memphis, TN [L]

(Alt. to Todd Crisman)

Kelly Lamp, Idaho Chapter NECA, ID [IM]

(Alt. to Wesley L. Wheeler)

Borgia Noel, State of Wyoming Fire Marshal's Office, WY [E]

(Alt. to Susan Newman Searce)

Kevin T. Porter, Encore Wire Corporation, TX [M]

(Alt. to Christel K. Hunter)

Mario Xerri, UL LLC, NY [RT]

(Alt. to Susan L. Stene)

Joseph S. Zimnoch, The Okonite Company, NJ [M]

(Alt. to George A. Straniero)

Code-Making Panel No. 7

Articles 545, 547, 550, 551, 552, 553, 555, 604, 675, and Annex D, Examples D11 and D12

L. Keith Lofland, *Chair*

International Association of Electrical Inspectors (IAEI), TX [E]

Rep. International Association of Electrical Inspectors

Jorge L. Arocha, Florida Power & Light, FL [UT]
Rep. Edison Electric Institute**Joseph R. Chandler**, Independent Electrical Contractors-Dallas, TX [IM]

Rep. Independent Electrical Contractors, Inc.

Wade Elliott, Utility Services Group, Inc., WA [U]

Rep. National Association of RV Parks & Campgrounds

Robert J. Fick, Alliant Energy, WI [U]

Rep. American Society of Agricultural & Biological Engineers

Robert A. Garcia, Cavco Industries/Fleetwood Homes, Inc., AZ [M]**Bruce A. Hopkins**, Recreation Vehicle Industry Association, VA [M]**Ryan Hyer**, Testing Engineers International, UT [RT]**Thomas R. Lichtenstein**, UL LLC, IL [RT]**Doug Mulvaney**, Kampgrounds of America, Inc., MT [U]**Clifford Norton**, Bellingham Marine Utilities, FL [IM]**Richard A. Paredes**, IBEW Local 164 JATC, NJ [L]

Rep. International Brotherhood of Electrical Workers

Stephen G. Rood, Legrand North America, NY [M]

Rep. National Electrical Manufacturers Association

Dave Watson, Southwire, GA [M]

Rep. The Aluminum Association, Inc.

Wesley L. Wheeler, National Electrical Contractors Association, MD [IM]

Rep. National Electrical Contractors Association

Michael L. Zieman, RADCO, CA [M]

Rep. Manufactured Housing Institute

Alternates

Barry S. Bauman, Alliant Energy, WI [U]

(Alt. to Robert J. Fick)

William Bruce Bowman, Fox Systems, Inc., GA [IM]

(Alt. to Joseph R. Chandler)

Byron Carroll, Carrol Woods Inc., NC [U]

(Alt. to Wade Elliott)

Gerald D. Dix, Hampton Roads Joint Apprenticeship Training Committee, VA [L]

(Alt. to Richard A. Paredes)

Dean C. Hunter, Minnesota Department of Labor & Industry, MN [E]

(Alt. to L. Keith Lofland)

Jeffrey Kreidler, Kampgrounds of America Inc., MT [U]

(Alt. to Doug Mulvaney)

Mark C. Ode, UL LLC, AZ [RT]

(Alt. to Thomas R. Lichtenstein)

Kent Perkins, Recreation Vehicle Industry Association, VA [M]

(Alt. to Bruce A. Hopkins)

Paul J. Reis, AFC Cable Systems, Inc., MA [M]

(Alt. to Dave Watson)

Matthew J. Samojeden, Hubbell Incorporated, CT [M]

(Alt. to Stephen G. Rood)

Code-Making Panel No. 8

Articles 342, 344, 348, 350, 352, 353, 354, 355, 356, 358, 360, 362, 366, 368, 370, 372, 374, 376, 378, 380, 384, 386, 388, 390, 392, Chapter 9, Tables 1 through 4, Example D13, and Annex C

Larry D. Cogburn, *Chair*
Cogburn Bros., Inc., FL [IM]
Rep. National Electrical Contractors Association

Doug Adams, MP Husky LLC, SC [M]
Rep. Cable Bus Manufacturers Association

Richard J. Berman, UL LLC, IL [RT]

David M. Campbell, AFC Cable Systems, Inc., MA [M]
Rep. The Aluminum Association, Inc.

Kenneth W. Hengst, 4C2 Electrical Specialists, TX [IM]
Rep. Independent Electrical Contractors, Inc.

Pete Jackson, City of Bakersfield, California, CA [E]
Rep. International Association of Electrical Inspectors

David H. Kendall, Thomas & Betts Corporation, TN [M]
Rep. The Vinyl Institute

Richard E. Loyd, R & N Associates, AZ [M]
Rep. Steel Tube Institute of North America

Michael C. Martin, ExxonMobil Research & Engineering, TX [U]
Rep. American Chemistry Council

Paul W. Myers, Nutrien, OH [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Donald R. Offerdahl, Intertek Testing Services, ND [RT]

Rhett A. Roe, IBEW Local Union 26 JATC, MD [L]
Rep. International Brotherhood of Electrical Workers

Rodney J. West, Schneider Electric, OH [M]
Rep. National Electrical Manufacturers Association

Alternates

Jay Burris, Wheatland Tube (Div. of Zekelman Industries), OH [M]
(Alt. to Richard E. Loyd)

Joel (Joey) Crider, AEP, OH [UT]
(Voting Alt.)

Brian Deacy, Allied Tube Conduit Corporation, IL [M]
(Alt. to David H. Kendall)

David A. Gerstetter, UL LLC, IL [RT]
(Alt. to Richard J. Berman)

J. Grant Hammett, Colorado State Electrical Board, CO [E]
(Alt. to Pete Jackson)

Gary K. Johnson, Dow Corning Corporation, LA [U]
(Alt. to Michael C. Martin)

Stephen P. Poholski, Newkirk Electric Associates, Inc., MI [IM]
(Alt. to Larry D. Cogburn)

Dan Rodriguez, IBEW Local Union 332, CA [L]
(Alt. to Rhett A. Roe)

Frederic F. Small, Hubbell Incorporated, CT [M]
(Alt. to Rodney J. West)

Dan Suriyamongkol, Advanced Cable Bus, SC [M]
(Alt. to Doug Adams)

Raul L. Vasquez, Independent Electrical Contractors, TX [IM]
(Alt. to Kenneth W. Hengst)

Dave Watson, Southwire, GA [M]
(Alt. to David M. Campbell)

Nonvoting

Stephen W. Douglas, QPS Evaluation Services Inc., Canada [SE]
Rep. CSA/Canadian Electrical Code Committee

Code-Making Panel No. 9

Articles 312, 314, 404, 408, 450, 490

David G. Humphrey, *Chair*
County of Henrico, Virginia, VA [E]
Rep. International Association of Electrical Inspectors

Richard Anderson, Fluor Corporation, TX [U]
Rep. Associated Builders & Contractors

Rodney D. Belisle, NECA-IBEW Electrical Training Trust, OR [L]
Rep. International Brotherhood of Electrical Workers

Carmon A. Colvin, Bright Future Electric, LLC, AL [IM]
Rep. Independent Electrical Contractors, Inc.

Frederic P. Hartwell, Hartwell Electrical Services, Inc., MA [SE]

Kevin R. Miller, Intertek Testing Services, WA [RT]

Robert D. Osborne, UL LLC, NC [RT]

Bradford D. Rupp, Allied Moulded Products, Inc., OH [M]
Rep. National Electrical Manufacturers Association

Timothy Schultheis, T.S.B Inc., Schultheis Electric, PA [IM]
Rep. National Electrical Contractors Association

Paul B. Sullivan, DuPont, SC [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Darrell M. Sumbera, Centerpoint Energy, TX [UT]
Rep. Edison Electric Institute

Ralph H. Young, Eastman Chemical Company, TN [U]
Rep. American Chemistry Council

Alternates

Jeffrey A. Fecteau, Underwriters Laboratories LLC, AZ [RT]
(Alt. to Robert D. Osborne)

Ken Filips, Bergelectric, OR [IM]
(Alt. to Carmon A. Colvin)

Barry N. Hornberger, PECO Energy Company, PA [UT]
(Alt. to Darrell M. Sumbera)

Michael O'Connell, Joint Apprentice & Training Committee of
Greater Boston, MA [L]
(Alt. to Rodney D. Belisle)

Ronnie H. Ridgeway, Siemens Industry, Inc., TX [M]
(Alt. to Bradford D. Rupp)

Pat Griffith Rose, City of Greensboro, NC [E]
(Alt. to David G. Humphrey)

Michael Simister, Intertek Testing Services, TX [RT]
(Alt. to Kevin R. Miller)

Code-Making Panel No. 10

Articles 215, 225, 230, 240, 242

Julian R. Burns, Chair

Quality Power Solutions, Inc., NC [IM]
Rep. Independent Electrical Contractors, Inc.

Paul D. Barnhart, UL LLC, NC [RT]

Scott A. Blizard, American Electrical Testing Company, Inc., MA [IM]

Rep. InterNational Electrical Testing Association

James T. Dollard, Jr., IBEW Local Union 98, PA [L]

Rep. International Brotherhood of Electrical Workers

Ed Koepke, Nidec Motor Corporation, MO [M]

Kenneth J. Rempe, Siemens Industry Inc., GA [M]

Rep. National Electrical Manufacturers Association

Vincent J. Saporita, Eaton's Bussmann Business, MO [M]

Roy K. Sparks, III, Eli Lilly and Company, IN [U]
Rep. American Chemistry Council

Steven E. Townsend, General Motors Company, MI [U]

Rep. Institute of Electrical & Electronics Engineers, Inc.

Christopher R. Vance, National Grid, NY [UT]

Rep. Electric Light & Power Group/EEI

David A. Williams, Delta Charter Township, MI [E]

Rep. International Association of Electrical Inspectors

Alternates

Anthony Dawes, DTE Energy, MI [UT]

(Alt. to Christopher R. Vance)

James Dorsey, Douglas County Electrical Inspector, CO [E]

(Alt. to David A. Williams)

Kevin J. Lippert, Eaton Corporation, PA [M]

(Alt. to Vincent J. Saporita)

Richard E. Lofton, II, IBEW Local Union 280, OR [L]

(Alt. to James T. Dollard, Jr.)

Alan Manche, Schneider Electric, KY [M]

(Alt. to Kenneth J. Rempe)

David Morrissey, American Electrical Testing Company, Inc., MA [IM]

(Alt. to Scott A. Blizard)

Nathan Philips, Integrated Electronic Systems, OR [IM]
(Voting Alt.)

Steve A. Struble, Freeman's Electric Service, Inc., SD [IM]
(Alt. to Julian R. Burns)

Peter R. Walsh, Teaticket Technical Associates, LLC, MA [U]
(Alt. to Steven E. Townsend)

Danish Zia, UL LLC, NY [RT]
(Alt. to Paul D. Barnhart)

Code-Making Panel No. 11

Articles 409, 430, 440, 460, 470, and Annex D, Example D8

Dirk R. F. Mueller, *Chair*

UL LLC, Germany [RT]

Rep. UL LLC

Luis M. Bas, Intertek Testing Services, FL [RT]**John E. Cabaniss**, Eastman Chemical Company, TN [U]

Rep. American Chemistry Council

Terry D. Cole, Hamer Electric, Inc., WA [IM]

Rep. Independent Electrical Contractors, Inc.

Zivorad Cosic, ABB Inc., WI [M]**Robert G. Fahey**, City of Janesville, WI [E]

Rep. International Association of Electrical Inspectors

Paul E. Guidry, Fluor Enterprises, Inc., TX [U]

Rep. Associated Builders & Contractors

Stephen M. Jackson, Southern Company, GA [UT]

Rep. Electric Light & Power Group/EEI

Arthur S. Neubauer, Arseal Technologies, GA [U]

Rep. American Petroleum Institute

Jebediah J. Novak, Cedar Rapids Electrical JATC, IA [L]

Rep. International Brotherhood of Electrical Workers

Joe Schomaker, Eaton, MO [M]**Arthur J. Smith, III**, Waldemar S. Nelson & Company, Inc., LA [U]

Rep. Institute of Electrical & Electronics Engineers, Inc.

Keith Waters, Schneider Electric, KY [M]

Rep. National Electrical Manufacturers Association

Ron Widup, Shermco Industries, TX [IM]

Rep. InterNational Electrical Testing Association

Alternates

Seth J. Carlton, UL LLC, IL [RT]

(Alt. to Dirk R. F. Mueller)

Donald P. Deachin, DTE, MI [UT]

(Alt. to Stephen M. Jackson)

Eric Gesualdi, Shell Oil Company, TX [U]

(Alt. to Arthur S. Neubauer)

Charles A. Goetz, Siemens Industry, Inc., IL [M]

(Alt. to Keith Waters)

Darryl Hill, Wichita Electrical JATC/IBEW 271, KS [L]

(Alt. to Jebediah J. Novak)

Tim Hinson, Miller Electric Company, FL [IM]

(Voting Alt.)

Chester Kelly, Dupont Chestnut Run Plaza, DE [U]

(Alt. to John E. Cabaniss)

Tim LaLonde, Haskin Electric, Inc., WA [IM]

(Alt. to Terry D. Cole)

Charles Littlefield, Goochland County, VA [E]

(Alt. to Robert G. Fahey)

Vincent J. Saporita, Eaton's Bussmann Business, MO [M]

(Alt. to Joe Schomaker)

Steven E. Townsend, General Motors Company, MI [U]

(Alt. to Arthur J. Smith, III)

Bobby A. Walton, Intertek, TX [RT]

(Alt. to Luis M. Bas)

Code-Making Panel No. 12

Articles 610, 620, 625, 626, 630, 640, 645, 646, 647, 650, 660, 665, 668, 669, 670, 685 and Annex D, Examples D9 and D10

Scott Cline, *Chair*

McMurtrey Electric, Inc., CA [IM]

Rep. National Electrical Contractors Association

Joseph M. Bablo, UL LLC, IL [RT]

Frank Anthony Belio, International Union of Elevator Constructors, CA [L]

Jeffrey W. Blain, Schindler Elevator Corporation, NJ [M]
Rep. National Elevator Industry Inc.Philip Clark, City of Southfield, MI [E]
Rep. International Association of Electrical InspectorsKarl M. Cunningham, Alcoa, Corporation, PA [M]
Rep. The Aluminum Association, Inc.

Joel Goergen, Cisco Systems, Inc., CA [M]

Jody B. Greenwood, Navy Crane Center, VA [U]

Jeffrey L. Holmes, IBEW Local Union 1 JATC, MO [L]
Rep. International Brotherhood of Electrical WorkersRobert E. Johnson, ITE Safety, MA [U]
Rep. Information Technology Industry Council

Mark S. Joiner, Office State Fire Marshal, LA [E]

Stanley Kaufman, CableSafe, Inc./OFS, GA [M]
Rep. Plastics Industry Association (Plastics)Todd R. Konieczny, Intertek Testing Services, MA [RT]
Rep. Intertek Testing ServicesTodd F. Lottmann, Eaton's Bussmann Business, PA [M]
Rep. National Electrical Manufacturers AssociationKarl Reighard, Delmarva Power and Light, MD [UT]
Rep. Edison Electric InstituteEdward E. Rodriguez, Walker Engineering, Inc., TX [IM]
Rep. Independent Electrical Contractors, Inc.James E. Tarchinski, General Motors Company, MI [U]
Rep. SAE Hybrid/EV Technical Standards Committee

Robert C. Turner, Inductotherm Corporation, PA [M]

Alternates

Rocco DeLuca, Jr., City And County Of Broomfield, CO [E]
(Alt. to Philip Clark)Jacob Haney, General Cable Corporation, IN [M]
(Alt. to Karl M. Cunningham)John D. (Doug) Henderson, ThyssenKrupp Elevator Manufacturing Inc., TN [M]
(Alt. to Jeffrey W. Blain)John R. Kovacik, UL LLC, IL [RT]
(Alt. to Joseph M. Bablo)Richard (Tony) O'Brien, Cisco Systems, Inc., CA [M]
(Alt. to Joel Goergen)Mike O'Meara, Arizona Public Service Company, AZ [UT]
(Alt. to Karl Reighard)Joseph F. Prisco, IBM Corporation, MN [U]
(Alt. to Robert E. Johnson)Peter Sedor, Intertek, MA [RT]
(Alt. to Todd R. Konieczny)Richard R. Shawbell, Jr., Florida East Coast Electrical JATC, FL [L]
(Alt. to Jeffrey L. Holmes)David B. Stump, Independent Electrical Contractors, TX [IM]
(Alt. to Edward E. Rodriguez)Emad Tabatabaei, Inductotherm Corporation, NJ [M]
(Alt. to Robert C. Turner)Frank Tse, Leviton Manufacturing Company, Inc., NY [M]
(Alt. to Todd F. Lottmann)

Nonvoting

Andre R. Cartal, Yardley, PA [E]
(Member Emeritus)

Code-Making Panel No. 13

Articles 445, 455, 480, 695, 700, 701, 702, 708, 750, Annex F and Annex G

Linda J. Little, *Chair*

IBEW Local 1 Electricians JATC, MO [L]

Martin D. Adams, Adams Electric, Inc., CO [IM]
Rep. National Electrical Contractors Association

Steve Baldwin, Intertek, CA [RT]
Rep. Intertek Testing Services

Greg J. Ball, Tesla, CA [M]

Krista McDonald Biason, HGA Architects and Engineers, MN [U]
Rep. American Society for Healthcare Engineering

Daniel J. Caron, Bard, Rao + Athanas Consulting Engineers, LLC, MA [SE]

Richard D. Currin, Jr., North Carolina State University, NC [U]
Rep. American Society of Agricultural & Biological Engineers

Neil A. Czarnecki, Reliance Controls Corporation, WI [M]
Rep. National Electrical Manufacturers Association

Steven F. Froemming, City of Franklin, WI [E]
Rep. International Association of Electrical Inspectors

Robert E. Jordan, Alabama Power Company, AL [UT]
Rep. Electric Light & Power Group/EEI

John R. Kovacik, UL LLC, IL [RT]

Greg Marchand, Briggs & Stratton, WI [M]
Rep. Portable Generator Manufacturers' Association

Daniel R. Neeser, Eaton's Bussmann Division, MO [M]

Shawn Paulsen, CSA Group, Canada [RT]

Arnoldo L. Rodriguez, LyondellBasell Industries, TX [U]
Rep. American Chemistry Council

Michael L. Savage, Sr., Marion County Building Safety, FL [E]

Mario C. Spina, Verizon Wireless, OH [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Kendall M. Waterman, Draka Cableteq, MA [M]
Rep. Copper Development Association Inc.

James R. White, Shermco Industries, Inc., TX [IM]
Rep. InterNational Electrical Testing Association

Timothy P. Windey, Cummins Power Generation, MN [M]

Alternates

Lawrence S. Ayer, Biz Com Electric, Inc., OH [IM]
(Voting Alt.)

Barry S. Bauman, Alliant Energy, WI [U]
(Alt. to Richard D. Currin, Jr.)

Glenn Brown, C/JL Engineering, PA [U]
(Alt. to Krista McDonald Biason)

William P. Cantor, TPI Corporation, PA [U]
(Alt. to Mario C. Spina)

James S. Conrad, RSCC Wire & Cable, CT [M]
(Alt. to Kendall M. Waterman)

Timothy Crnko, Eaton's Bussmann Business, MO [M]
(Alt. to Daniel R. Neeser)

James T. Dollard, Jr., IBEW Local Union 98, PA [L]
(Alt. to Linda J. Little)

Laurie B. Florence, UL LLC, IL [RT]
(Alt. to John R. Kovacik)

Travis Foster, Shell Oil Company, TX [U]
(Alt. to Arnoldo L. Rodriguez)

Richard Garbark, BGE, MD [UT]
(Alt. to Robert E. Jordan)

Jan Gromadzki, Tesla, CA [M]
(Alt. to Greg J. Ball)

Jeff Jonas, Generac Power Systems, Inc., WI [M]
(Voting Alt.)

Chad Kennedy, Schneider Electric, SC [M]
(Alt. to Neil A. Czarnecki)

Raymond Richard Prucha, Bard, Rao + Athanas Consulting Engineers, LLC, NY [SE]
(Alt. to Daniel J. Caron)

Daniel Schlepp, Wacker Neuson, WI [M]
(Alt. to Greg Marchand)

Rich Scroggins, Cummins Power Generation, MN [M]
(Alt. to Timothy P. Windey)

Richard Tice, VEC, Inc., OH [IM]
(Alt. to Martin D. Adams)

Anton Tomasini, City Of Rochester Hills, MI [E]
(Alt. to Steven F. Froemming)

Michael Wilson, CSA Group, Canada [RT]
(Alt. to Shawn Paulsen)

Code-Making Panel No. 14

Articles 500, 501, 502, 503, 504, 505, 506, 510, 511, 513, 514, 515, 516

Michael W. Smith, Chair

Schaeffer Electric Company, MO [IM]
Rep. National Electrical Contractors Association

Donald W. Ankele, UL LLC, IL [RT]

Steven J. Blais, Appleton Group, IL [M]

Rep. National Electrical Manufacturers Association

Corey Cahill, U.S. Coast Guard, DC [E]

Mark A. Chrysler, City of San Diego, CA [E]

Rep. International Association of Electrical Inspectors

William T. Fiske, Intertek Testing Services, NY [RT]

Mark Goodman, Mark Goodman Electrical Consulting, CA [U]

Rep. American Petroleum Institute

William G. Lawrence, Jr., FM Global, MA [I]

L. Evans Massey, Baldor Electric Company, SC [M]

Rep. Instrumentation, Systems, & Automation Society

William E. McBride, CONAM Construction Company, AK [U]

Rep. Institute of Electrical & Electronics Engineers, Inc.

Jeremy Neagle, U.S. Bureau of Alcohol, Tobacco, Firearms & Explosives, MD [U]

Thomas L. Pottschmidt, Indianapolis Power & Light, IN [UT]

Rep. Edison Electric Institute

Lowell Reith, Interstates Construction Services, Inc., KS [IM]

Rep. Independent Electrical Contractors, Inc.

John L. Simmons, Florida East Coast JATC, FL [L]

Rep. International Brotherhood of Electrical Workers

Fred K. Walker, U.S. Department Of The Air Force, FL [E]

David B. Wechsler, Consultant, TX [U]

Rep. American Chemistry Council

Mark C. Wirfs, R & W Engineering, Inc., OR [U]

Rep. Grain Elevator and Processing Society

Alternates

Mihail Bantic, Intertek, TX [RT]

(Alt. to William T. Fiske)

Dave Burns, Shell P&T: Innovation/R&D, TX [U]

(Alt. to Mark Goodman)

Cory Cole, Hamer Electric, Inc., WA [IM]

(Alt. to Lowell Reith)

Thomas E. Dunne, Long Island Joint Apprenticeship & Training Committee, NY [L]

(Alt. to John L. Simmons)

Andrew Hernandez, AstraZeneca Pharmaceuticals, DE [U]

(Alt. to William E. McBride)

Richard A. Holub, The DuPont Company, Inc., DE [U]

(Alt. to David B. Wechsler)

Paul T. Kelly, UL LLC, IL [RT]

(Alt. to Donald W. Ankele)

Haywood Kines, Prince William County Building Development, VA [E]

(Alt. to Mark A. Chrysler)

Edmund R. Leubner, Eaton's Crouse-Hinds Business, NY [M]

(Alt. to Steven J. Blais)

Eddie Ramirez, FM Global, MA [I]

(Alt. to William G. Lawrence, Jr.)

Ted H. Schnaare, Rosemount Incorporated, MN [M]

(Alt. to L. Evans Massey)

Nonvoting

Michael E. Aaron, Wiss Janney Elstner Associates, Inc., IL [SE]

Rep. TC on Airport Facilities

Timothy J. Pope, Canadian Standards Association, Canada [RT]

Code-Making Panel No. 15

Articles 517, 518, 520, 522, 525, 530, 540

Lawrence E. Todd, *Chair*
Intertek Testing Services, KY [RT]

Chad E. Beebe, ASHE - AHA, WA [U]

David A. Dagenais, Partners/Wentworth-Douglass Hospital, NH [U]
Rep. NFPA Health Care Section

Matthew B. Dozier, IDesign Services, TN [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Joe L. DuPriest, City of St. Cloud, FL [E]
Rep. International Association of Electrical Inspectors

Kenneth J. Gilbert, Florida Power & Light Company, FL [UT]
Rep. Electric Light & Power Group/EEL

Pamela Gwynn, UL LLC, NC [RT]
Rep. UL LLC

Mitchell K. Hefter, Signify, TX [IM]
Rep. Illuminating Engineering Society of North America

Kim Jones, Funtastic Shows, OR [U]
Rep. Outdoor Amusement Business Association, Inc.

Edwin S. Kramer, Radio City Music Hall, NY [L]
Rep. International Alliance of Theatrical Stage Employees

Gary J. Krupa, U.S. Department of Veterans Affairs, NE [U]

Kevin T. Porter, Encore Wire Corporation, TX [M]
Rep. The Aluminum Association, Inc.

Brian E. Rock, Hubbell Incorporated, CT [M]
Rep. National Electrical Manufacturers Association

James C. Seabury III, Enterprise Electric, LLC, TN [IM]
Rep. Independent Electrical Contractors, Inc.

Bruce D. Shelly, Shelly Electric Company, Inc., PA [IM]
Rep. National Electrical Contractors Association

Michael D. Skinner, CBS Studio Center, CA [U]
Rep. Alliance of Motion Picture and Television Producers

Steven R. Terry, Electronic Theatre Controls Inc., NY [M]
Rep. U.S. Institute for Theatre Technology, Inc.

Alternates

Michael A. Anthony, Standards Michigan, MI [U]
(Alt. to Matthew B. Dozier)

Gary A. Beckstrand, Utah Electrical JATC, UT [L]
(Voting Alt.)

David M. Campbell, AFC Cable Systems, Inc., MA [M]
(Alt. to Kevin T. Porter)

Carmon A. Colvin, Bright Future Electric, LLC, AL [IM]
(Alt. to James C. Seabury III)

Connor Wright Frazier, HGA Architects And Engineers, MN [U]
(Alt. to Chad E. Beebe)

Samuel B. Friedman, General Cable Corporation, RI [M]
(Alt. to Brian E. Rock)

Edward Joseph, Underwriters Laboratories Inc., NY [RT]
(Alt. to Pamela Gwynn)

Jay Y. Kogoma, Intertek Testing Services, CA [RT]
(Alt. to Lawrence E. Todd)

Frank Novitzki, U.S. Department of Veterans Affairs, VA [U]
(Alt. to Gary J. Krupa)

Don Rabel, Mid-West Electric Company, TX [IM]
(Alt. to Bruce D. Shelly)

Douglas Rheinheimer, Paramount Pictures, CA [U]
(Alt. to Michael D. Skinner)

Alan M. Rowe, International Alliance of Theatrical Stage Employees, CA [L]
(Alt. to Edwin S. Kramer)

Clinton Bret Stoddard, City of Rexburg, ID [E]
(Alt. to Joe L. DuPriest)

Walter N. Vernon, IV, Mazzetti, CA [SE]
(Voting Alt.)

R. Duane Wilson, George C. Izenour Associates, Inc., NM [IM]
(Alt. to Mitchell K. Hefter)

Code-Making Panel No. 16

Articles 770, 800, 805, 810, 820, 830, 840

Thomas E. Moore, *Chair*
City of Beachwood, OH [E]

Rep. International Association of Electrical Inspectors

George Bish, Amazon/Ring Protect Inc., NC [IM]
Rep. Satellite Broadcasting & Communications Association

James E. Brunssen, Telcordia Technologies (Ericsson), NJ [U]
Rep. Alliance for Telecommunications Industry Solutions

Terry C. Coleman, Electrical Training Alliance, TN [L]
Rep. International Brotherhood of Electrical Workers

Robert Davies, Davies Electric Company, CA [IM]
Rep. National Electrical Contractors Association

Fred C. Dawson, Chemours, Canada [U]
Rep. American Chemistry Council

Gerald Lee Dorna, Belden Wire & Cable Co., IN [M]
Rep. Insulated Cable Engineers Association, Inc.

Robert W. Jensen, dbi-Telecommunication Infrastructure Design, TX [M]
Rep. Building Industry Consulting Services International

Steven C. Johnson, Johnson Telecom, LLC, TX [UT]
Rep. Society of Cable Telecommunications Engineers (SCTE)

William J. McCoy, Telco Sales, Inc., TX [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Michael F. Murphy, Intertek Testing Services, MA [RT]

Thomas J. Parrish, Telgian Corporation, MI [M]
Rep. Automatic Fire Alarm Association, Inc.

Roy Pollack, Comcast Xfinity Home, FL [UT]
Rep. Electronic Security Association

Luigi G. Prezioso, M. C. Dean, Inc., VA [IM]
Rep. Independent Electrical Contractors, Inc.

Rodger Reiswig, Johnson Controls, FL [M]
Rep. National Electrical Manufacturers Association

Masood Shariff, Commscope, NJ [M]
Rep. Telecommunications Industry Association

Anthony Tassone, UL LLC, NY [RT]
Rep. UL LLC

Leo Zieman, Florida Power & Light (Nextera Energy), FL [UT]
Rep. Electric Light & Power Group/EEI

Alternates

Rendell K. Bourg, National Fire Protection Company Inc., HI [M]
(Alt. to Thomas J. Parrish)

Trevor N. Bowmer, Telcordia (Ericsson), NJ [U]
(Alt. to James E. Brunssen)

Larry Chan, City of New Orleans, LA [E]
(Alt. to Thomas E. Moore)

Timothy D. Cooke, Times Fiber Communications, Inc., VA [UT]
(Alt. to Steven C. Johnson)

Randolph J. Ivans, UL LLC, NY [RT]
(Alt. to Anthony Tassone)

John A. Kacperski, P2S Engineering, Inc., CA [M]
(Alt. to Robert W. Jensen)

Stanley Kaufman, CableSafe, Inc./OFS, GA [M]
(Alt. to Gerald Lee Dorna)

Eric Lawrence, Berk-Tek, A Nexans Company, PA [M]
(Alt. to Masood Shariff)

Diana M. Lettkeman, Dish Network Service, LLC, CO [IM]
(Alt. to George Bish)

Christopher Rawson, International Brotherhood of Electrical Workers- Technical Institute (IBEW), IL [L]
(Alt. to Terry C. Coleman)

David B. Schrembeck, DBS Communications, Inc., OH [IM]
(Alt. to Luigi G. Prezioso)

Carl R. Wetterhan, General Cable Industries, Inc., KY [M]
(Alt. to Rodger Reiswig)

Code-Making Panel No. 17

Articles 422, 424, 426, 427, 680, 682

Donald R. Cook, *Chair*

Shelby County Department of Development Services, AL [E]

Rep. International Association of Electrical Inspectors

Thomas V. Blewitt, UL LLC, NY [RT]

Jerry Lee Daniel, Texas Department of Licensing Regulation, TX [E]

E. P. Hamilton, III, E. P. Hamilton & Associates, Inc., TX [M]
Rep. Association of Pool & Spa Professionals

Emmanuel (Lee) DeWayne Jones, Georgia Power Company, GA [UT]

Rep. Electric Light & Power Group/EEI

Brian Myers, IBEW Local Union 98, PA [L]

Rep. International Brotherhood of Electrical Workers

Timothy R. O'Brien, Chula Vista Electric, CA [IM]

Rep. National Electrical Contractors Association

Dennis Michael Querry, Trinity River Authority, TX [IM]

Rep. Independent Electrical Contractors, Inc.

Chester L. Sandberg, C L Sandberg & Associates, LLC, CA [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.Kenneth M. Shell, nVent Thermal Management, CA [M]
Rep. Copper Development Association Inc.Kam Fai Siu, Intertek Testing Services, Hong Kong [RT]
Rep. Intertek Testing ServicesPeter C. Swim, Whirlpool Corporation, MI [M]
Rep. Air-Conditioning, Heating, & Refrigeration InstituteMarcelo E. Valdes, GE Energy Industrial Solutions, NC [M]
Rep. National Electrical Manufacturers Association

Matt B. Williams, Association of Home Appliance Manufacturers (AHAM), DC [M]

Rep. Association of Home Appliance Manufacturers

Alternates

Paul W. Abernathy, Encore Wire Corporation, TX [M]
(Alt. to Kenneth M. Shell)Ryan Andrew, Alaska Joint Electrical Apprenticeship and Training Trust, AK [L]
(Alt. to Brian Myers)Bernie Donnie Bell, Gulf Power Company, FL [UT]
(Alt. to Emmanuel (Lee) DeWayne Jones)Masud Chowdhury, Association of Home Appliance Manufacturers (AHAM), VA [M]
(Alt. to Matt B. Williams)Chris Faucette, State of North Carolina, NC [E]
(Alt. to Donald R. Cook)Stephen R. Kuscsik, Underwriters Laboratories Inc., IL [RT]
(Alt. to Thomas V. Blewitt)Armando M. Lozano, MSF Electric, Inc., TX [IM]
(Alt. to Dennis Michael Querry)Stephen Macey, Watkins Manufacturing Corporation, CA [M]
(Alt. to E. P. Hamilton, III)Bernard Poton, Intertek, TX [RT]
(Alt. to Kam Fai Siu)Larry Reichle, Texas Department Of Licensing Regulation, TX [E]
(Alt. to Jerry Lee Daniel)Svetlana Ulemek, Hubbel/Burndy LLC, NH [M]
(Alt. to Marcelo E. Valdes)Thomas H. Wood, Cecil B. Wood, Inc., IL [IM]
(Alt. to Timothy R. O'Brien)

Nonvoting

Andrew M. Trotta, U.S. Consumer Product Safety Commission, MD [C]
Rep. U.S. Consumer Product Safety CommissionDouglas A. Lee, U.S. Consumer Product Safety Commission, MD [C]
Rep. U.S. Consumer Product Safety Commission

Code-Making Panel No. 18

Articles 393, 406, 410, 411, 600, 605

Bobby J. Gray, Chair

Hoydar/Buck, Inc., WA [IM]

Rep. National Electrical Contractors Association

Ron D. Alley, Northern New Mexico IEC, NM [IM]
Rep. Independent Electrical Contractors, Inc.

Frederick L. Carpenter, Acuity Brands Lighting, GA [M]
Rep. National Electrical Manufacturers Association

Kurt J. Clemente, Clark Nexsen, Inc., VA [U]
Rep. Institute of Electrical & Electronics Engineers, Inc.

Paul Costello, NECA and IBEW Local 90 JATC, CT [L]
Rep. International Brotherhood of Electrical Workers

Hakim Hasan, Intertek, GA [RT]

Jack E. Jamison, Jr., Miller Engineering, Inc., WV [E]
Rep. International Association of Electrical Inspectors

Charles S. Kurten, UL LLC, NY [RT]

William Ross McCordle, American Electric Power, OK [UT]
Rep. Electric Light & Power Group/EEI

Michael S. O'Boyle, Philips Lightolier, MA [M]
Rep. American Lighting Association

Wesley J. Wilkens, Persona, Inc., SD [M]
Rep. International Sign Association

Randall K. Wright, RKW Consulting, PA [SE]

Alternates

Donald Berlin, Intermatic Inc., IL [M]
(Alt. to Michael S. O'Boyle)

Juan M. Caamaño, UL LLC, NY [RT]
(Alt. to Charles S. Kurten)

Mark Coshal, IES Commercial of San Antonio, TX [IM]
(Alt. to Ron D. Alley)

Gabriel A. Griffin, Clear Sign and Design Inc., CA [M]
(Alt. to Wesley J. Wilkens)

Richard Hollander, City of Tucson, AZ [E]
(Alt. to Jack E. Jamison, Jr.)

Robert Setaro, Intertek, GA [RT]
(Alt. to Hakim Hasan)

Frank Tse, Leviton Manufacturing Company, Inc., NY [M]
(Alt. to Frederick L. Carpenter)

Daniel Van Sickle, III, Electrical Training Alliance of Jacksonville, FL [L]
(Alt. to Paul Costello)

Paul Yesbeck, ACU Sign Corporation, FL [IM]
(Alt. to Bobby J. Gray)

Committee Scope: This Committee shall have primary responsibility for documents on minimizing the risk of electricity as a source of electric shock and as a potential ignition source of fires and explosions. It shall also be responsible for text to minimize the propagation of fire and explosions due to electrical installations.

NFPA Electrical Engineering Division Technical Staff

Gordon S. Frost, Division Manager

Mark W. Earley, Chief Electrical Engineer

Sarah D. Caldwell, Technical Committee Administrator

Kimberly H. Cervantes, Senior Technical Content Editor

Barry Chase, Senior Engineer

Mark Cloutier, Senior Electrical Engineer

Christopher Coache, Senior Electrical Engineer

Erik Hohengasser, Technical Lead, Electrical

Richard J. Roux, Senior Electrical Specialist

Jeffrey S. Sargent, Principal Electrical Specialist

NFPA 70

National Electrical Code

2020 Edition

IMPORTANT NOTE: This NFPA document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notices and Disclaimers Concerning NFPA Standards.” They can also be viewed at www.nfpa.org/disclaimers or obtained on request from NFPA.

UPDATES, ALERTS, AND FUTURE EDITIONS: New editions of NFPA codes, standards, recommended practices, and guides (i.e., NFPA Standards) are released on scheduled revision cycles. This edition may be superseded by a later one, or it may be amended outside of its scheduled revision cycle through the issuance of Tentative Interim Amendments (TIAs). An official NFPA Standard at any point in time consists of the current edition of the document, together with all TIAs and Errata in effect. To verify that this document is the current edition or to determine if it has been amended by TIAs or Errata, please consult the National Fire Codes® Subscription Service or the “List of NFPA Codes & Standards” at www.nfpa.org/docinfo. In addition to TIAs and Errata, the document information pages also include the option to sign up for alerts for individual documents and to be involved in the development of the next edition.

ARTICLE 90

Introduction

90.1 Purpose.

(A) Practical Safeguarding. The purpose of this *Code* is the practical safeguarding of persons and property from hazards arising from the use of electricity. This *Code* is not intended as a design specification or an instruction manual for untrained persons.

(B) Adequacy. This *Code* contains provisions that are considered necessary for safety. Compliance therewith and proper maintenance result in an installation that is essentially free from hazard but not necessarily efficient, convenient, or adequate for good service or future expansion of electrical use.

Informational Note: Hazards often occur because of overloading of wiring systems by methods or usage not in conformity with this *Code*. This occurs because initial wiring did not provide for increases in the use of electricity. An initial adequate installation and reasonable provisions for system changes provide for future increases in the use of electricity.

(C) Relation to Other International Standards. The requirements in this *Code* address the fundamental principles of protection for safety contained in Section 131 of International Electrotechnical Commission Standard 60364-1, *Electrical Installations of Buildings*.

Informational Note: IEC 60364-1, Section 131, contains fundamental principles of protection for safety that encompass protection against electric shock, protection against thermal effects, protection against overcurrent, protection against fault currents, and protection against overvoltage. All of these potential hazards are addressed by the requirements in this *Code*.

90.2 Scope.

(A) Covered. This *Code* covers the installation and removal of electrical conductors, equipment, and raceways; signaling and communications conductors, equipment, and raceways; and optical fiber cables for the following:

- (1) Public and private premises, including buildings, structures, mobile homes, recreational vehicles, and floating buildings
- (2) Yards, lots, parking lots, carnivals, and industrial substations
- (3) Installations of conductors and equipment that connect to the supply of electricity
- (4) Installations used by the electric utility, such as office buildings, warehouses, garages, machine shops, and recreational buildings, that are not an integral part of a generating plant, substation, or control center
- (5) Installations supplying shore power to ships and watercraft in marinas and boatyards, including monitoring of leakage current
- (6) Installations used to export electric power from vehicles to premises wiring or for bidirectional current flow

(B) Not Covered. This *Code* does not cover the following:

- (1) Installations in ships, watercraft other than floating buildings, railway rolling stock, aircraft, or automotive vehicles other than mobile homes and recreational vehicles

Informational Note: Although the scope of this *Code* indicates that the *Code* does not cover installations in ships, portions of this *Code* are incorporated by reference into Title 46, Code of Federal Regulations, Parts 110–113.

- (2) Installations underground in mines and self-propelled mobile surface mining machinery and its attendant electrical trailing cable
- (3) Installations of railways for generation, transformation, transmission, energy storage, or distribution of power used exclusively for operation of rolling stock or installations used exclusively for signaling and communications purposes
- (4) Installations of communications equipment under the exclusive control of communications utilities located outdoors or in building spaces used exclusively for such installations

- (5) Installations under the exclusive control of an electric utility where such installations
- Consist of service drops or service laterals, and associated metering, or
 - Are on property owned or leased by the electric utility for the purpose of communications, metering, generation, control, transformation, transmission, energy storage, or distribution of electric energy, or
 - Are located in legally established easements or rights-of-way, or
 - Are located by other written agreements either designated by or recognized by public service commissions, utility commissions, or other regulatory agencies having jurisdiction for such installations. These written agreements shall be limited to installations for the purpose of communications, metering, generation, control, transformation, transmission, energy storage, or distribution of electric energy where legally established easements or rights-of-way cannot be obtained. These installations shall be limited to federal lands, Native American reservations through the U.S. Department of the Interior Bureau of Indian Affairs, military bases, lands controlled by port authorities and state agencies and departments, and lands owned by railroads.

Informational Note to (4) and (5): Examples of utilities may include those entities that are typically designated or recognized by governmental law or regulation by public service/utility commissions and that install, operate, and maintain electric supply (such as generation, transmission, or distribution systems) or communications systems (such as telephone, CATV, Internet, satellite, or data services). Utilities may be subject to compliance with codes and standards covering their regulated activities as adopted under governmental law or regulation. Additional information can be found through consultation with the appropriate governmental bodies, such as state regulatory commissions, the Federal Energy Regulatory Commission, and the Federal Communications Commission.

(C) Special Permission. The authority having jurisdiction for enforcing this *Code* may grant exception for the installation of conductors and equipment that are not under the exclusive control of the electric utilities and are used to connect the electric utility supply system to the service conductors of the premises served, provided such installations are outside a building or structure, or terminate inside at a readily accessible location nearest the point of entrance of the service conductors.

90.3 Code Arrangement. This *Code* is divided into the introduction and nine chapters, as shown in Figure 90.3. Chapters 1, 2, 3, and 4 apply generally. Chapters 5, 6, and 7 apply to special occupancies, special equipment, or other special conditions and may supplement or modify the requirements in Chapters 1 through 7.

Chapter 8 covers communications systems and is not subject to the requirements of Chapters 1 through 7 except where the requirements are specifically referenced in Chapter 8.

Chapter 9 consists of tables that are applicable as referenced.

Informative annexes are not part of the requirements of this *Code* but are included for informational purposes only.

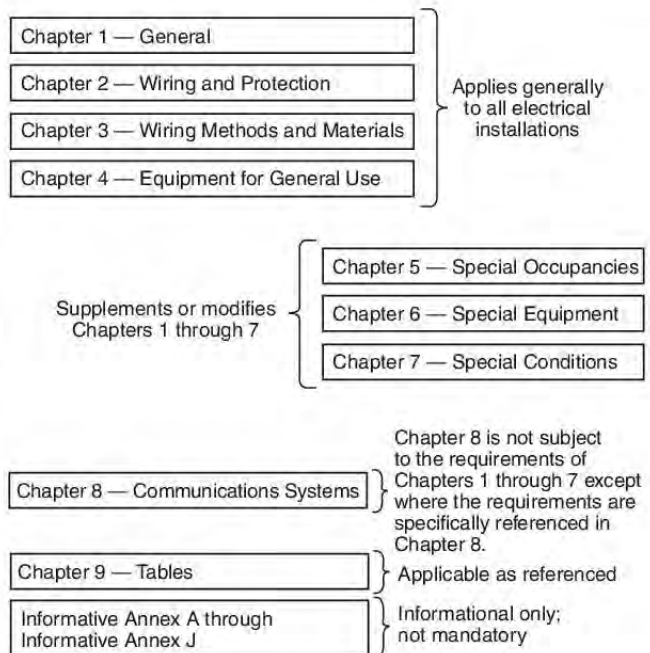


FIGURE 90.3 Code Arrangement.

90.4 Enforcement. This *Code* is intended to be suitable for mandatory application by governmental bodies that exercise legal jurisdiction over electrical installations, including signaling and communications systems, and for use by insurance inspectors. The authority having jurisdiction for enforcement of the *Code* has the responsibility for making interpretations of the rules, for deciding on the approval of equipment and materials, and for granting the special permission contemplated in a number of the rules.

By special permission, the authority having jurisdiction may waive specific requirements in this *Code* or permit alternative methods where it is assured that equivalent objectives can be achieved by establishing and maintaining effective safety.

This *Code* may require new products, constructions, or materials that may not yet be available at the time the *Code* is adopted. In such event, the authority having jurisdiction may permit the use of the products, constructions, or materials that comply with the most recent previous edition of this *Code* adopted by the jurisdiction.

90.5 Mandatory Rules, Permissive Rules, and Explanatory Material.

(A) Mandatory Rules. Mandatory rules of this *Code* are those that identify actions that are specifically required or prohibited and are characterized by the use of the terms *shall* or *shall not*.

(B) Permissive Rules. Permissive rules of this *Code* are those that identify actions that are allowed but not required, are normally used to describe options or alternative methods, and are characterized by the use of the terms *shall be permitted* or *shall not be required*.

(C) Explanatory Material. Explanatory material, such as references to other standards, references to related sections of this *Code*, or information related to a *Code* rule, is included in this *Code* in the form of informational notes. Such notes are informational only and are not enforceable as requirements of this *Code*.

Brackets containing section references to another NFPA document are for informational purposes only and are provided as a guide to indicate the source of the extracted text. These bracketed references immediately follow the extracted text.

Informational Note: The format and language used in this *Code* follows guidelines established by NFPA and published in the *NEC Style Manual*. Copies of this manual can be obtained from NFPA.

(D) Informative Annexes. Nonmandatory information relative to the use of the *NEC* is provided in informative annexes. Informative annexes are not part of the enforceable requirements of the *NEC*, but are included for information purposes only.

90.6 Formal Interpretations. To promote uniformity of interpretation and application of this *Code*, formal interpretation procedures have been established and are found in the NFPA Regulations Governing Committee Projects.

90.7 Examination of Equipment for Safety. For specific items of equipment and materials referred to in this *Code*, examinations for safety made under standard conditions provide a basis for approval where the record is made generally available through promulgation by organizations properly equipped and qualified for experimental testing, inspections of the run of goods at factories, and service-value determination through field inspections. This avoids the necessity for repetition of examinations by different examiners, frequently with inadequate facilities for such work, and the confusion that would result from conflicting reports on the suitability of devices and materials examined for a given purpose.

It is the intent of this *Code* that factory-installed internal wiring or the construction of equipment need not be inspected at the time of installation of the equipment, except to detect alterations or damage, if the equipment has been listed by a qualified electrical testing laboratory that is recognized as having the facilities described in the preceding paragraph and that requires suitability for installation in accordance with this *Code*. Suitability shall be determined by application of requirements that are compatible with this *Code*.

Informational Note No. 1: See requirements in 110.3.

Informational Note No. 2: *Listed* is defined in Article 100.

Informational Note No. 3: Informative Annex A contains a list of product safety standards that are compatible with this *Code*.

90.8 Wiring Planning.

(A) Future Expansion and Convenience. Plans and specifications that provide ample space in raceways, spare raceways, and

additional spaces allow for future increases in electric power and communications circuits. Distribution centers located in readily accessible locations provide convenience and safety of operation.

(B) Number of Circuits in Enclosures. It is elsewhere provided in this *Code* that the number of circuits confined in a single enclosure be varyingly restricted. Limiting the number of circuits in a single enclosure minimizes the effects from a short circuit or ground fault.

90.9 Units of Measurement.

(A) Measurement System of Preference. For the purpose of this *Code*, metric units of measurement are in accordance with the modernized metric system known as the International System of Units (SI).

(B) Dual System of Units. SI units shall appear first, and inch-pound units shall immediately follow in parentheses. Conversion from inch-pound units to SI units shall be based on hard conversion except as provided in 90.9(C).

(C) Permitted Uses of Soft Conversion. The cases given in 90.9(C)(1) through (C)(4) shall not be required to use hard conversion and shall be permitted to use soft conversion.

(1) Trade Sizes. Where the actual measured size of a product is not the same as the nominal size, trade size designators shall be used rather than dimensions. Trade practices shall be followed in all cases.

(2) Extracted Material. Where material is extracted from another standard, the context of the original material shall not be compromised or violated. Any editing of the extracted text shall be confined to making the style consistent with that of the *NEC*.

(3) Industry Practice. Where industry practice is to express units in inch-pound units, the inclusion of SI units shall not be required.

(4) Safety. Where a negative impact on safety would result, soft conversion shall be used.

(D) Compliance. Conversion from inch-pound units to SI units shall be permitted to be an approximate conversion. Compliance with the numbers shown in either the SI system or the inch-pound system shall constitute compliance with this *Code*.

Informational Note No. 1: Hard conversion is considered a change in dimensions or properties of an item into new sizes that might or might not be interchangeable with the sizes used in the original measurement. Soft conversion is considered a direct mathematical conversion and involves a change in the description of an existing measurement but not in the actual dimension.

Informational Note No. 2: SI conversions are based on IEEE/ASTM SI 10-1997, *Standard for the Use of the International System of Units (SI): The Modern Metric System*.

Chapter 1 General

ARTICLE 100

Definitions

Scope. This article contains only those definitions essential to the application of this *Code*. It is not intended to include commonly defined general terms or commonly defined technical terms from related codes and standards. In general, only those terms that are used in two or more articles are defined in Article 100. Definitions are also found in XXX.2 sections of other articles.

Part I of this article contains definitions intended to apply wherever the terms are used throughout this *Code*. Part II contains definitions applicable to installations and equipment operating at over 1000 volts, nominal. Part III contains definitions applicable to Hazardous (Classified) Locations.

Part I. General

Accessible (as applied to equipment). Capable of being reached for operation, renewal, and inspection. (CMP-1)

Accessible (as applied to wiring methods). Capable of being removed or exposed without damaging the building structure or finish or not permanently closed in by the structure or finish of the building. (CMP-1)

Accessible, Readily (Readily Accessible). Capable of being reached quickly for operation, renewal, or inspections without requiring those to whom ready access is requisite to take actions such as to use tools (other than keys), to climb over or under, to remove obstacles, or to resort to portable ladders, and so forth. (CMP-1)

Informational Note: Use of keys is a common practice under controlled or supervised conditions and a common alternative to the ready access requirements under such supervised conditions as provided elsewhere in the NEC.

Adjustable Speed Drive. Power conversion equipment that provides a means of adjusting the speed of an electric motor. (CMP-11)

Informational Note: A variable frequency drive is one type of electronic adjustable speed drive that controls the rotational speed of an ac electric motor by controlling the frequency and voltage of the electrical power supplied to the motor.

Adjustable Speed Drive System. A combination of an adjustable speed drive, its associated motor(s), and auxiliary equipment. (CMP-11)

Ampacity. The maximum current, in amperes, that a conductor can carry continuously under the conditions of use without exceeding its temperature rating. (CMP-6)

Appliance. Utilization equipment, generally other than industrial, that is normally built in standardized sizes or types and is installed or connected as a unit to perform one or more functions such as clothes washing, air-conditioning, food mixing, deep frying, and so forth. (CMP-17)

Approved. Acceptable to the authority having jurisdiction. (CMP-1)

Arc-Fault Circuit Interrupter (AFCI). A device intended to provide protection from the effects of arc faults by recognizing characteristics unique to arcing and by functioning to de-energize the circuit when an arc fault is detected. (CMP-2)

Askarel. A generic term for a group of nonflammable synthetic chlorinated hydrocarbons used as electrical insulating media. (CMP-9)

Informational Note: Askarels of various compositional types are used. Under arcing conditions, the gases produced, while consisting predominantly of noncombustible hydrogen chloride, can include varying amounts of combustible gases, depending on the askarel type.

Attachment Fitting. A device that, by insertion into a locking support and mounting receptacle, establishes a connection between the conductors of the attached utilization equipment and the branch-circuit conductors connected to the locking support and mounting receptacle. (CMP-18)

Informational Note: An attachment fitting is different from an attachment plug because no cord is associated with the fitting. An attachment fitting in combination with a locking support and mounting receptacle secures the associated utilization equipment in place and supports its weight.

Attachment Plug (Plug Cap) (Plug). A device that, by insertion in a receptacle, establishes a connection between the conductors of the attached flexible cord and the conductors connected permanently to the receptacle. (CMP-18)

Authority Having Jurisdiction (AHJ). An organization, office, or individual responsible for enforcing the requirements of a code or standard, or for approving equipment, materials, an installation, or a procedure. (CMP-1)

Informational Note: The phrase "authority having jurisdiction," or its acronym AHJ, is used in NFPA documents in a broad manner, since jurisdictions and approval agencies vary, as do their responsibilities. Where public safety is primary, the authority having jurisdiction may be a federal, state, local, or other regional department or individual such as a fire chief; fire marshal; chief of a fire prevention bureau; labor department, or health department; building official; electrical inspector; or others having statutory authority. For insurance purposes, an insurance inspection department, rating bureau, or other insurance company representative may be the authority having jurisdiction. In many circumstances, the property owner or his or her designated agent assumes the role of the authority having jurisdiction; at government installations, the commanding officer or departmental official may be the authority having jurisdiction.

Automatic. Performing a function without the necessity of human intervention. (CMP-1)

Bathroom. An area including a sink (basin) with one or more of the following: a toilet, a urinal, a tub, a shower, a bidet, or similar plumbing fixtures. (CMP-2)

Battery System. Interconnected battery subsystems consisting of one or more storage batteries and battery chargers, and can

include inverters, converters, and associated electrical equipment. (CMP-13)

Bonded (Bonding). Connected to establish electrical continuity and conductivity. (CMP-5)

Bonding Conductor or Jumper. A reliable conductor to ensure the required electrical conductivity between metal parts required to be electrically connected. (CMP-5)

Bonding Jumper, Equipment. The connection between two or more portions of the equipment grounding conductor. (CMP-5)

Bonding Jumper, Main. The connection between the grounded circuit conductor and the equipment grounding conductor, or the supply-side bonding jumper, or both, at the service. (CMP-5)

Bonding Jumper, Supply-Side. A conductor installed on the supply side of a service or within a service equipment enclosure(s), or for a separately derived system, that ensures the required electrical conductivity between metal parts required to be electrically connected. (CMP-5)

Bonding Jumper, System. The connection between the grounded circuit conductor and the supply-side bonding jumper, or the equipment grounding conductor, or both, at a separately derived system. (CMP-5)

Branch Circuit. The circuit conductors between the final overcurrent device protecting the circuit and the outlet(s). (CMP-2)

Branch Circuit, Appliance. A branch circuit that supplies energy to one or more outlets to which appliances are to be connected and that has no permanently connected luminaires that are not a part of an appliance. (CMP-2)

Branch Circuit, General-Purpose. A branch circuit that supplies two or more receptacles or outlets for lighting and appliances. (CMP-2)

Branch Circuit, Individual. A branch circuit that supplies only one utilization equipment. (CMP-2)

Branch Circuit, Multiwire. A branch circuit that consists of two or more ungrounded conductors that have a voltage between them, and a grounded conductor that has equal voltage between it and each ungrounded conductor of the circuit and that is connected to the neutral or grounded conductor of the system. (CMP-2)

Building. A structure that stands alone or that is separated from adjoining structures by fire walls. (CMP-1)

Cabinet. An enclosure that is designed for either surface mounting or flush mounting and is provided with a frame, mat, or trim in which a swinging door or doors are or can be hung. (CMP-9)

Cable, Coaxial. A cylindrical assembly composed of a conductor centered inside a metallic tube or shield, separated by a dielectric material, and usually covered by an insulating jacket. (CMP-16)

Cable, Optical Fiber. A factory assembly or field assembly of one or more optical fibers having an overall covering. (CMP-16)

Informational Note: A field-assembled optical fiber cable is an assembly of one or more optical fibers within a jacket. The jacket, without optical fibers, is installed in a manner similar to conduit or raceway. Once the jacket is installed, the optical fibers are inserted into the jacket, completing the cable assembly.

Cable, Optical Fiber, Composite. A cable containing optical fibers and current-carrying electrical conductors. (CMP-16)

Cable, Optical Fiber, Conductive. A factory assembly of one or more optical fibers having an overall covering and containing non-current-carrying conductive member(s) such as metallic strength member(s), metallic vapor barrier(s), metallic armor, or metallic sheath. (CMP-16)

Cable, Optical Fiber, Nonconductive. A factory assembly of one or more optical fibers having an overall covering and containing no electrically conductive materials. (CMP-16)

Cable Routing Assembly. A single channel or connected multiple channels, as well as associated fittings, forming a structural system that is used to support and route communications wires and cables, optical fiber cables, data cables associated with information technology and communications equipment, Class 2, Class 3, and Type PLTC cables, and power-limited fire alarm cables in plenum, riser, and general-purpose applications. (CMP-16)

Charge Controller. Equipment that controls dc voltage or dc current, or both, and that is used to charge a battery or other energy storage device. (CMP-13)

Circuit Breaker. A device designed to open and close a circuit by nonautomatic means and to open the circuit automatically on a predetermined overcurrent without damage to itself when properly applied within its rating. (CMP-10)

Informational Note: The automatic opening means can be integral, direct acting with the circuit breaker, or remote from the circuit breaker.

Adjustable (as applied to circuit breakers). A qualifying term indicating that the circuit breaker can be set to trip at various values of current, time, or both, within a predetermined range.

Instantaneous Trip (as applied to circuit breakers). A qualifying term indicating that no delay is purposely introduced in the tripping action of the circuit breaker.

Inverse Time (as applied to circuit breakers). A qualifying term indicating that there is purposely introduced a delay in the tripping action of the circuit breaker, which delay decreases as the magnitude of the current increases.

Nonadjustable (as applied to circuit breakers). A qualifying term indicating that the circuit breaker does not have any adjustment to alter the value of the current at which it will trip or the time required for its operation.

Setting (of circuit breakers). The value of current, time, or both, at which an adjustable circuit breaker is set to trip.

Circuit Integrity (CI) Cable. Cable(s) used for remote-control, signaling, or power-limited systems that supply critical circuits to ensure survivability for continued circuit operation for a specified time under fire conditions. (CMP-3)

Class 1 Circuit. The portion of the wiring system between the load side of the overcurrent device or power-limited supply and the connected equipment. (CMP-3)

Informational Note: See 725.41 for voltage and power limitations of Class 1 circuits.

Class 2 Circuit. The portion of the wiring system between the load side of a Class 2 power source and the connected equipment. Due to its power limitations, a Class 2 circuit considers safety from a fire initiation standpoint and provides acceptable protection from electric shock. (CMP-3)

Class 3 Circuit. The portion of the wiring system between the load side of a Class 3 power source and the connected equipment. Due to its power limitations, a Class 3 circuit considers safety from a fire initiation standpoint. Since higher levels of voltage and current than for Class 2 are permitted, additional safeguards are specified to provide protection from an electric shock hazard that could be encountered. (CMP-3)

Clothes Closet. A nonhabitable room or space intended primarily for storage of garments and apparel. (CMP-1)

Communications Equipment. The electronic equipment that performs the telecommunications operations for the transmission of audio, video, and data, and includes power equipment (e.g., dc converters, inverters, and batteries), technical support equipment (e.g., computers), and conductors dedicated solely to the operation of the equipment. (CMP-16)

Informational Note: As the telecommunications network transitions to a more data-centric network, computers, routers, servers, and their powering equipment, are becoming essential to the transmission of audio, video, and data and are finding increasing application in communications equipment installations.

Concealed. Rendered inaccessible by the structure or finish of the building. (CMP-1)

Informational Note: Wires in concealed raceways are considered concealed, even though they may become accessible by withdrawing them.

Conductor, Bare. A conductor having no covering or electrical insulation whatsoever. (CMP-6)

Conductor, Covered. A conductor encased within material of composition or thickness that is not recognized by this *Code* as electrical insulation. (CMP-6)

Conductor, Insulated. A conductor encased within material of composition and thickness that is recognized by this *Code* as electrical insulation. (CMP-6)

Conduit Body. A separate portion of a conduit or tubing system that provides access through a removable cover(s) to the interior of the system at a junction of two or more sections of the system or at a terminal point of the system.

Boxes such as FS and FD or larger cast or sheet metal boxes are not classified as conduit bodies. (CMP-9)

Connector, Pressure (Solderless). A device that establishes a connection between two or more conductors or between one or more conductors and a terminal by means of mechanical pressure and without the use of solder. (CMP-1)

Continuous Load. A load where the maximum current is expected to continue for 3 hours or more. (CMP-2)

Control Circuit. The circuit of a control apparatus or system that carries the electric signals directing the performance of the controller but does not carry the main power current. (CMP-11)

Controller. A device or group of devices that serves to govern, in some predetermined manner, the electric power delivered to the apparatus to which it is connected. (CMP-1)

Cooking Unit, Counter-Mounted. A cooking appliance designed for mounting in or on a counter and consisting of one or more heating elements, internal wiring, and built-in or mountable controls. (CMP-2)

Coordination, Selective (Selective Coordination). Localization of an overcurrent condition to restrict outages to the circuit or equipment affected, accomplished by the selection and installation of overcurrent protective devices and their ratings or settings for the full range of available overcurrents, from overload to the available fault current, and for the full range of overcurrent protective device opening times associated with those overcurrents. (CMP-10)

Copper-Clad Aluminum Conductors. Conductors drawn from a copper-clad aluminum rod, with the copper metallurgically bonded to an aluminum core, where the copper forms a minimum of 10 percent of the cross-sectional area of a solid conductor or each strand of a stranded conductor. (CMP-6)

Cutout Box. An enclosure designed for surface mounting that has swinging doors or covers secured directly to and telescoping with the walls of the enclosure. (CMP-9)

DC-to-DC Converter. A device that can provide an output dc voltage and current at a higher or lower value than the input dc voltage and current. (CMP-4)

Dead Front. Without live parts exposed to a person on the operating side of the equipment. (CMP-9)

Demand Factor. The ratio of the maximum demand of a system, or part of a system, to the total connected load of a system or the part of the system under consideration. (CMP-2)

Device. A unit of an electrical system, other than a conductor, that carries or controls electric energy as its principal function. (CMP-1)

Disconnecting Means. A device, or group of devices, or other means by which the conductors of a circuit can be disconnected from their source of supply. (CMP-1)

Dormitory Unit. A building or a space in a building in which group sleeping accommodations are provided for more than 16 persons who are not members of the same family in one room, or a series of closely associated rooms, under joint occupancy and single management, with or without meals, but without individual cooking facilities. (CMP 2)

Duty, Continuous. Operation at a substantially constant load for an indefinitely long time. (CMP-1)

Duty, Intermittent. Operation for alternate intervals of (1) load and no load; or (2) load and rest; or (3) load, no load, and rest. (CMP-1)

Duty, Periodic. Intermittent operation in which the load conditions are regularly recurrent. (CMP-1)

Duty, Short-Time. Operation at a substantially constant load for a short and definite, specified time. (CMP-1)

Duty, Varying. Operation at loads, and for intervals of time, both of which may be subject to wide variation. (CMP-1)

Dwelling, One-Family. A building that consists solely of one dwelling unit. (CMP-1)

Dwelling, Two-Family. A building that consists solely of two dwelling units. (CMP-1)

Dwelling, Multifamily. A building that contains three or more dwelling units. (CMP-1)

Dwelling Unit. A single unit, providing complete and independent living facilities for one or more persons, including permanent provisions for living, sleeping, cooking, and sanitation. (CMP-2)

Effective Ground-Fault Current Path. An intentionally constructed, low-impedance electrically conductive path designed and intended to carry current under ground-fault conditions from the point of a ground fault on a wiring system to the electrical supply source and that facilitates the operation of the overcurrent protective device or ground-fault detectors. (CMP-5)

Electric Power Production and Distribution Network. Power production, distribution, and utilization equipment and facilities, such as electric utility systems that are connected to premises wiring and are external to and not controlled by an interactive system. (CMP-13)

Electric Sign. A fixed, stationary, or portable self-contained, electrically operated and/or electrically illuminated utilization equipment with words or symbols designed to convey information or attract attention. (CMP-18)

Electric Vehicle (EV). An automotive-type vehicle for on-road use, such as passenger automobiles, buses, trucks, vans, neighborhood electric vehicles, electric motorcycles, and the like, primarily powered by an electric motor that draws current from a rechargeable storage battery, fuel cell, photovoltaic array, or other source of electric current. Plug-in hybrid electric vehicles (PHEV) are electric vehicles having a second source of motive power. Off-road, self-propelled electric mobile equipment, such as industrial trucks, hoists, lifts, transports, golf carts, airline ground support equipment, tractors, boats, and the like, are not considered electric vehicles. (CMP-12)

Electrical Circuit Protective System A system consisting of components and materials intended for installation as protection for specific electrical wiring systems with respect to the disruption of electrical circuit integrity upon exterior fire exposure. (CMP-16)

Electrical Datum Plane. A specified distance above a water level above which electrical equipment can be installed and electrical connections can be made. (CMP-7)

Electric-Discharge Lighting. Systems of illumination utilizing fluorescent lamps, high-intensity discharge (HID) lamps, or neon tubing. (CMP-18)

Electronically Actuated Fuse. An overcurrent protective device that generally consists of a control module that provides current-sensing, electronically derived time-current characteristics, energy to initiate tripping, and an interrupting module that interrupts current when an overcurrent occurs. Such fuses may or may not operate in a current-limiting fashion, depending on the type of control selected. (CMP-10)

Enclosed. Surrounded by a case, housing, fence, or wall(s) that prevents persons from accidentally contacting energized parts. (CMP-1)

Enclosure. The case or housing of apparatus, or the fence or walls surrounding an installation to prevent personnel from accidentally contacting energized parts or to protect the equipment from physical damage. (CMP-1)

Informational Note: See Table 110.28 for examples of enclosure types.

Energized. Electrically connected to, or is, a source of voltage. (CMP-1)

Equipment. A general term, including fittings, devices, appliances, luminaires, apparatus, machinery, and the like used as a part of, or in connection with, an electrical installation. (CMP-1)

Equipotential Plane. Accessible conductive parts bonded together to reduce voltage gradients in a designated area. (CMP-17)

Exposed (as applied to live parts). Capable of being inadvertently touched or approached nearer than a safe distance by a person. (CMP-1)

Informational Note: This term applies to parts that are not suitably guarded, isolated, or insulated.

Exposed (as applied to wiring methods). On or attached to the surface or behind panels designed to allow access. (CMP-1)

Externally Operable. Capable of being operated without exposing the operator to contact with live parts. (CMP-1)

Fault Current. The current delivered at a point on the system during a short-circuit condition. (CMP-10)

Fault Current, Available (Available Fault Current). The largest amount of current capable of being delivered at a point on the system during a short-circuit condition. (CMP-10)

Informational Note: A short-circuit can occur during abnormal conditions such as a fault between circuit conductors or a ground fault. See Informational Note Figure 100.1.


Feeder. All circuit conductors between the service equipment, the source of a separately derived system, or other power supply source and the final branch-circuit overcurrent device. (CMP-10)

Festoon Lighting. A string of outdoor lights that is suspended between two points. (CMP-18)

Field Evaluation Body (FEB). An organization or part of an organization that performs field evaluations of electrical or other equipment. [790, 2018] (CMP-1)

Informational Note: NFPA 790-2018, *Standard for Competency of Third-Party Field Evaluation Bodies*, provides guidelines for establishing the qualification and competency of a body performing field evaluations of electrical products and assemblies with electrical components.

Field Labeled (as applied to evaluated products). Equipment or materials to which has been attached a label, symbol, or other identifying mark of an FEB indicating the equipment or materials were evaluated and found to comply with requirements as described in an accompanying field evaluation report. [790, 2018] (CMP-1)

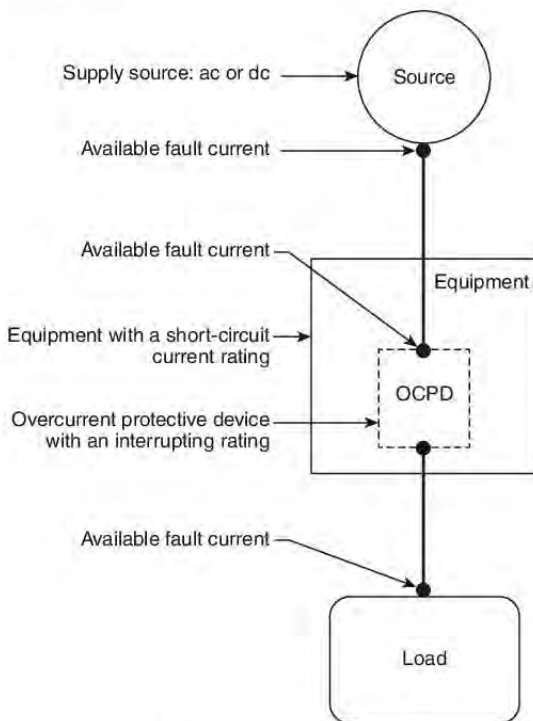

Informational Note Figure 100.1 Available Fault Current.

Fitting. An accessory such as a locknut, bushing, or other part of a wiring system that is intended primarily to perform a mechanical rather than an electrical function. (CMP-1)

Free Air (as applied to conductors). Open or ventilated environment that allows for heat dissipation and air flow around an installed conductor. (CMP-6)

Fuel Cell. An electrochemical system that consumes fuel to produce an electric current. In such cells, the main chemical reaction used for producing electric power is not combustion. However, there may be sources of combustion used within the overall cell system, such as reformers/fuel processors. (CMP-4)

Fuel Cell System. The complete aggregate of equipment used to convert chemical fuel into usable electricity and typically consisting of a reformer, stack, power inverter, and auxiliary equipment. (CMP-4)

Garage. A building or portion of a building in which one or more self-propelled vehicles can be kept for use, sale, storage, rental, repair, exhibition, or demonstration purposes. (CMP-1)

Informational Note: For commercial garages, repair and storage, see Article 511.

Generating Capacity, Inverter. The sum of parallel-connected inverter maximum continuous output power at 40°C in watts or kilowatts. (CMP-4)

Ground. The earth. (CMP-5)

Ground Fault. An unintentional, electrically conductive connection between an ungrounded conductor of an electrical circuit and the normally non-current-carrying conductors, metallic enclosures, metallic raceways, metallic equipment, or earth. (CMP-5)

Grounded (Grounding). Connected (connecting) to ground or to a conductive body that extends the ground connection. (CMP-5)

Grounded, Solidly. Connected to ground without inserting any resistor or impedance device. (CMP-5)

Grounded Conductor. A system or circuit conductor that is intentionally grounded. (CMP-5)

Informational Note: Although an equipment grounding conductor is grounded, it is not considered a grounded conductor.

Ground-Fault Circuit Interrupter (GFCI). A device intended for the protection of personnel that functions to de-energize a circuit or portion thereof within an established period of time when a ground-fault current exceeds the values established for a Class A device. (CMP-2)

Informational Note: Class A ground-fault circuit interrupters trip when the ground-fault current is 6 mA or higher and do not trip when the ground-fault current is less than 4 mA. For further information, see UL 943, *Standard for Ground-Fault Circuit Interrupters*.

Ground-Fault Current Path. An electrically conductive path from the point of a ground fault on a wiring system through normally non-current-carrying conductors, grounded conductors, equipment, or the earth to the electrical supply source. (CMP-5)

Informational Note: Examples of ground-fault current paths are any combination of equipment grounding conductors, metallic raceways, metallic cable sheaths, electrical equipment, and any other electrically conductive material such as metal, water, and gas piping; steel framing members; stucco mesh; metal ducting; reinforcing steel; shields of communications cables; grounded conductors; and the earth itself.

Ground-Fault Protection of Equipment. A system intended to provide protection of equipment from damaging line-to-ground fault currents by operating to cause a disconnecting means to open all ungrounded conductors of the faulted circuit. This protection is provided at current levels less than those required to protect conductors from damage through the operation of a supply circuit overcurrent device. (CMP-5)

Grounding Conductor, Equipment (EGC). A conductive path(s) that is part of an effective ground-fault current path and connects normally non-current-carrying metal parts of equipment together and to the system grounded conductor or to the grounding electrode conductor, or both. (CMP-5)

Informational Note No. 1: It is recognized that the equipment grounding conductor also performs bonding.

Informational Note No. 2: See 250.118 for a list of acceptable equipment grounding conductors.

Grounding Electrode. A conducting object through which a direct connection to earth is established. (CMP-5)

Grounding Electrode Conductor. A conductor used to connect the system grounded conductor or the equipment to a grounding electrode or to a point on the grounding electrode system. (CMP-5)

Guarded. Covered, shielded, fenced, enclosed, or otherwise protected by means of suitable covers, casings, barriers, rails, screens, mats, or platforms to remove the likelihood of

approach or contact by persons or objects to a point of danger. (CMP-1)

Guest Room. An accommodation combining living, sleeping, sanitary, and storage facilities within a compartment. (CMP-2)

Guest Suite. An accommodation with two or more contiguous rooms comprising a compartment, with or without doors between such rooms, that provides living, sleeping, sanitary, and storage facilities. (CMP-2)

Habitable Room. A room in a building for living, sleeping, eating, or cooking, but excluding bathrooms, toilet rooms, closets, hallways, storage or utility spaces, and similar areas. (CMP-2)

Handhole Enclosure. An enclosure for use in underground systems, provided with an open or closed bottom, and sized to allow personnel to reach into, but not enter, for the purpose of installing, operating, or maintaining equipment or wiring or both. (CMP-9)

Hermetic Refrigerant Motor-Compressor. A combination consisting of a compressor and motor, both of which are enclosed in the same housing, with no external shaft or shaft seals, with the motor operating in the refrigerant. (CMP-11)

Hoistway. Any shaftway, hatchway, well hole, or other vertical opening or space in which an elevator or dumbwaiter is designed to operate. (CMP-12)

Hybrid System. A system comprised of multiple power sources. These power sources could include photovoltaic, wind, microhydro generators, engine-driven generators, and others, but do not include electric power production and distribution network systems. Energy storage systems such as batteries, flywheels, or superconducting magnetic storage equipment do not constitute a power source for the purpose of this definition. The energy regenerated by an overhauling (descending) elevator does not constitute a power source for the purpose of this definition. (CMP-4)

Identified (as applied to equipment). Recognizable as suitable for the specific purpose, function, use, environment, application, and so forth, where described in a particular *Code* requirement. (CMP-1)

Informational Note: Some examples of ways to determine suitability of equipment for a specific purpose, environment, or application include investigations by a qualified testing laboratory (listing and labeling), an inspection agency, or other organizations concerned with product evaluation.

In Sight From (Within Sight From, Within Sight). Where this *Code* specifies that one equipment shall be “in sight from,” “within sight from,” or “within sight of,” and so forth, another equipment, the specified equipment is to be visible and not more than 15 m (50 ft) distant from the other. (CMP-1)

Industrial Control Panel. An assembly of two or more components consisting of one of the following: (1) power circuit components only, such as motor controllers, overload relays, fused disconnect switches, and circuit breakers; (2) control circuit components only, such as push buttons, pilot lights, selector switches, timers, switches, and control relays; (3) a combination of power and control circuit components. These components, with associated wiring and terminals, are mounted on, or contained within, an enclosure or mounted on a subpanel.

The industrial control panel does not include the controlled equipment. (CMP-11)

Information Technology Equipment (ITE). Equipment and systems rated 1000 volts or less, normally found in offices or other business establishments and similar environments classified as ordinary locations, that are used for creation and manipulation of data, voice, video, and similar signals that are not communications equipment as defined in Part I of Article 100 and do not process communications circuits as defined in 805.2. (CMP-12)

Informational Note: For information on listing requirements for both information technology equipment and communications equipment, see UL 60950-1-2014, *Information Technology Equipment — Safety — Part I: General Requirements* or UL 62368-1-2014, *Audio/Video Information and Communication Technology Equipment Part I: Safety Requirements*.

Information Technology Equipment Room. A room within the information technology equipment area that contains the information technology equipment. [75:3.3.14] (CMP-12)

Innerduct. A nonmetallic raceway placed within a larger raceway. (CMP-16)

Interactive Inverter. An inverter intended for use in parallel with power source(s) such as an electric utility to supply common loads and capable of delivering power to the utility. (CMP-13)

Interactive System. An electric power production system that is operating in parallel with and capable of delivering energy to an electric primary source supply system. (CMP-4)

Interrupting Rating. The highest current at rated voltage that a device is identified to interrupt under standard test conditions. (CMP-10)

Informational Note: Equipment intended to interrupt current at other than fault levels may have its interrupting rating implied in other ratings, such as horsepower or locked rotor current.

Intersystem Bonding Termination. A device that provides a means for connecting intersystem bonding conductors for communications systems to the grounding electrode system. (CMP-16)

Inverter. Equipment that changes dc to ac. (CMP-4)

Inverter Input Circuit. Conductors connected to the dc input of an inverter. (CMP-13)

Inverter Output Circuit. Conductors connected to the ac output of an inverter. (CMP-13)

Inverter, Multimode. Equipment having the capabilities of both the interactive inverter and the stand-alone inverter. (CMP-4)

Island Mode. The operational mode for stand-alone power production equipment or an isolated microgrid, or for a multimode inverter or an interconnected microgrid that is disconnected from an electric power production and distribution network or other primary power source. (CMP-4)

Informational Note: Isolated microgrids are distinguished from interconnected microgrids, which are addressed in Article 705.

Isolated (as applied to location). Not readily accessible to persons unless special means for access are used. (CMP-1)

Kitchen. An area with a sink and permanent provisions for food preparation and cooking. (CMP-2)

Labeled. Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner. (CMP-1)

Informational Note: If a listed product is of such a size, shape, material, or surface texture that it is not possible to apply legibly the complete label to the product, the complete label may appear on the smallest unit container in which the product is packaged.

Laundry Area. An area containing or designed to contain a laundry tray, clothes washer, or clothes dryer. (CMP-2)

Lighting Outlet. An outlet intended for the direct connection of a lampholder or luminaire. (CMP-18)

Lighting Track (Track Lighting). A manufactured assembly designed to support and energize luminaires that are capable of being readily repositioned on the track. Its length can be altered by the addition or subtraction of sections of track. (CMP-18)

Listed. Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production of listed equipment or materials or periodic evaluation of services, and whose listing states that either the equipment, material, or service meets appropriate designated standards or has been tested and found suitable for a specified purpose. (CMP-1)

Informational Note: The means for identifying listed equipment may vary for each organization concerned with product evaluation, some of which do not recognize equipment as listed unless it is also labeled. Use of the system employed by the listing organization allows the authority having jurisdiction to identify a listed product.

Live Parts. Energized conductive components. (CMP-1)

Location, Damp. Locations protected from weather and not subject to saturation with water or other liquids but subject to moderate degrees of moisture. (CMP-1)

Informational Note: Examples of such locations include partially protected locations under canopies, marquees, roofed open porches, and like locations, and interior locations subject to moderate degrees of moisture, such as some basements, some barns, and some cold-storage warehouses.

Location, Dry. A location not normally subject to dampness or wetness. A location classified as dry may be temporarily subject to dampness or wetness, as in the case of a building under construction. (CMP-1)

Location, Wet. Installations underground or in concrete slabs or masonry in direct contact with the earth; in locations subject to saturation with water or other liquids, such as vehicle washing areas; and in unprotected locations exposed to weather. (CMP-1)

Luminaire. A complete lighting unit consisting of a light source such as a lamp or lamps, together with the parts

designed to position the light source and connect it to the power supply. It may also include parts to protect the light source or the ballast or to distribute the light. A lampholder itself is not a luminaire. (CMP-18)

Messenger or Messenger Wire. A wire that is run along with or integral with a cable or conductor to provide mechanical support for the cable or conductor. (CMP-6)

Motor Control Center. An assembly of one or more enclosed sections having a common power bus and principally containing motor control units. (CMP-11)

Multioilet Assembly. A type of surface, flush, or freestanding raceway designed to hold conductors and receptacles, assembled in the field or at the factory. (CMP-18)

Neutral Conductor. The conductor connected to the neutral point of a system that is intended to carry current under normal conditions. (CMP-5)

Neutral Point. The common point on a wye-connection in a polyphase system or midpoint on a single-phase, 3-wire system, or midpoint of a single-phase portion of a 3-phase delta system, or a midpoint of a 3-wire, direct-current system. (CMP-5)

Informational Note: At the neutral point of the system, the vectorial sum of the nominal voltages from all other phases within the system that utilize the neutral, with respect to the neutral point, is zero potential.

Nonautomatic. Requiring human intervention to perform a function. (CMP-1)

Nonlinear Load. A load where the wave shape of the steady-state current does not follow the wave shape of the applied voltage. (CMP-1)

Informational Note: Electronic equipment, electronic/electric-discharge lighting, adjustable-speed drive systems, and similar equipment may be nonlinear loads.

Outlet. A point on the wiring system at which current is taken to supply utilization equipment. (CMP-1)

Outline Lighting. An arrangement of incandescent lamps, electric-discharge lighting, or other electrically powered light sources to outline or call attention to certain features such as the shape of a building or the decoration of a window. (CMP-18)

Overcurrent. Any current in excess of the rated current of equipment or the ampacity of a conductor. It may result from overload, short circuit, or ground fault. (CMP-10)

Informational Note: A current in excess of rating may be accommodated by certain equipment and conductors for a given set of conditions. Therefore, the rules for overcurrent protection are specific for particular situations.

Overcurrent Protective Device, Branch-Circuit. A device capable of providing protection for service, feeder, and branch circuits and equipment over the full range of overcurrents between its rated current and its interrupting rating. Such devices are provided with interrupting ratings appropriate for the intended use but no less than 5000 amperes. (CMP-10)

Overcurrent Protective Device, Supplementary. A device intended to provide limited overcurrent protection for specific applications and utilization equipment such as luminaires and appliances. This limited protection is in addition to the protec-

tion provided in the required branch circuit by the branch-circuit overcurrent protective device. (CMP-10)

Overload. Operation of equipment in excess of normal, full-load rating, or of a conductor in excess of its ampacity that, when it persists for a sufficient length of time, would cause damage or dangerous overheating. A fault, such as a short circuit or ground fault, is not an overload. (CMP-10)

Panelboard. A single panel or group of panel units designed for assembly in the form of a single panel, including buses and automatic overcurrent devices, and equipped with or without switches for the control of light, heat, or power circuits; designed to be placed in a cabinet or cutout box placed in or against a wall, partition, or other support; and accessible only from the front. (CMP-9)

Photovoltaic (PV) System. The total components, circuits, and equipment up to and including the PV system disconnecting means that, in combination, convert solar energy into electric energy. (CMP-4)

Pier. A structure extending over the water and supported on a fixed foundation (fixed pier), or on flotation (floating pier), that provides access to the water. [303:3.3.17] (CMP-7)

Pier, Fixed. Pier constructed on a permanent, fixed foundation, such as on piles, that permanently establishes the elevation of the structure deck with respect to land. [303:3.3.17.2] (CMP-7)

Pier, Floating. Pier designed with inherent flotation capability that allows the structure to float on the water surface and rise and fall with water level changes. [303:3.3.17.3] (CMP-7)

Plenum. A compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system. (CMP-3)

Power Outlet. An enclosed assembly that may include receptacles, circuit breakers, fuseholders, fused switches, buses, and watt-hour meter mounting means; intended to supply and control power to mobile homes, recreational vehicles, park trailers, or boats or to serve as a means for distributing power required to operate mobile or temporarily installed equipment. (CMP-7)

Power Production Equipment. Electrical generating equipment supplied by any source other than a utility service, up to the source system disconnecting means. (CMP-4)

Informational Note: Examples of power production equipment include such items as generators, solar photovoltaic systems, and fuel cell systems.

Power-Limited Tray Cable (PLTC). A factory assembly of two or more insulated conductors rated at 300 volts, with or without associated bare or insulated equipment grounding conductors, under a nonmetallic jacket. (CMP-3)

Premises Wiring (System). Interior and exterior wiring, including power, lighting, control, and signal circuit wiring together with all their associated hardware, fittings, and wiring devices, both permanently and temporarily installed. This includes (a) wiring from the service point or power source to the outlets or (b) wiring from and including the power source to the outlets where there is no service point.

Such wiring does not include wiring internal to appliances, luminaires, motors, controllers, motor control centers, and similar equipment. (CMP-1)

Informational Note: Power sources include, but are not limited to, interconnected or stand-alone batteries, solar photovoltaic systems, other distributed generation systems, or generators.

Prime Mover. The machine that supplies the mechanical horsepower to a generator. (CMP-13)

Qualified Person. One who has skills and knowledge related to the construction and operation of the electrical equipment and installations and has received safety training to recognize and avoid the hazards involved. (CMP-1)

Informational Note: Refer to *NFPA 70E-2018, Standard for Electrical Safety in the Workplace*, for electrical safety training requirements.

Raceway. An enclosed channel designed expressly for holding wires, cables, or busbars, with additional functions as permitted in this *Code*. (CMP-8)

Informational Note: A raceway is identified within specific article definitions.

Raceway, Communications. An enclosed channel of nonmetallic materials designed expressly for holding communications wires and cables; optical fiber cables; data cables associated with information technology and communications equipment; Class 2, Class 3, and Type PLTC cables; and power-limited fire alarm cables in plenum, riser, and general-purpose applications. (CMP-16)

Rainproof. Constructed, protected, or treated so as to prevent rain from interfering with the successful operation of the apparatus under specified test conditions. (CMP-1)

Raintight. Constructed or protected so that exposure to a beating rain will not result in the entrance of water under specified test conditions. (CMP-1)

Receptacle. A contact device installed at the outlet for the connection of an attachment plug, or for the direct connection of electrical utilization equipment designed to mate with the corresponding contact device. A single receptacle is a single contact device with no other contact device on the same yoke or strap. A multiple receptacle is two or more contact devices on the same yoke or strap. (CMP-18)

Informational Note: A duplex receptacle is an example of a multiple receptacle that has two receptacles on the same yoke or strap.

Receptacle Outlet. An outlet where one or more receptacles are installed. (CMP-18)

Reconditioned. Electromechanical systems, equipment, apparatus, or components that are restored to operating conditions. This process differs from normal servicing of equipment that remains within a facility, or replacement of listed equipment on a one-to-one basis. (CMP-10)

Informational Note: The term *reconditioned* is frequently referred to as *rebuilt*, *refurbished*, or *remanufactured*.

Remote-Control Circuit. Any electrical circuit that controls any other circuit through a relay or an equivalent device. (CMP-3)

Retrofit Kit. A general term for a complete subassembly of parts and devices for field conversion of utilization equipment. (CMP-18)

Sealable Equipment. Equipment enclosed in a case or cabinet that is provided with a means of sealing or locking so that live parts cannot be made accessible without opening the enclosure. (CMP-1)

Informational Note: The equipment may or may not be operable without opening the enclosure.

Separately Derived System. An electrical source, other than a service, having no direct connection(s) to circuit conductors of any other electrical source other than those established by grounding and bonding connections. (CMP-5)

Service. The conductors and equipment connecting the serving utility to the wiring system of the premises served. (CMP-10)

Service Cable. Service conductors made up in the form of a cable. (CMP-10)

Service Conductors. The conductors from the service point to the service disconnecting means. (CMP-10)

Service Conductors, Overhead. The overhead conductors between the service point and the first point of connection to the service-entrance conductors at the building or other structure. (CMP-10)

Service Conductors, Underground. The underground conductors between the service point and the first point of connection to the service-entrance conductors in a terminal box, meter, or other enclosure, inside or outside the building wall. (CMP-10)

Informational Note: Where there is no terminal box, meter, or other enclosure, the point of connection is considered to be the point of entrance of the service conductors into the building.

Service Drop. The overhead conductors between the serving utility and the service point. (CMP-10)

Service-Entrance Conductors, Overhead System. The service conductors between the terminals of the service equipment and a point usually outside the building, clear of building walls, where joined by tap or splice to the service drop or overhead service conductors. (CMP-10)

Service-Entrance Conductors, Underground System. The service conductors between the terminals of the service equipment and the point of connection to the service lateral or underground service conductors. (CMP-10)

Informational Note: Where service equipment is located outside the building walls, there may be no service-entrance conductors or they may be entirely outside the building.

Service Equipment. The necessary equipment, consisting of a circuit breaker(s) or switch(es) and fuse(s) and their accessories, connected to the serving utility and intended to constitute the main control and disconnect of the serving utility. (CMP-10)

Service Lateral. The underground conductors between the utility electric supply system and the service point. (CMP-10)

Service Point. The point of connection between the facilities of the serving utility and the premises wiring. (CMP-10)

Informational Note: The service point can be described as the point of demarcation between where the serving utility ends and the premises wiring begins. The serving utility generally specifies the location of the service point based on the conditions of service.

Short-Circuit Current Rating. The prospective symmetrical fault current at a nominal voltage to which an apparatus or system is able to be connected without sustaining damage exceeding defined acceptance criteria. (CMP-10)

Show Window. Any window, including windows above doors, used or designed to be used for the display of goods or advertising material, whether it is fully or partly enclosed or entirely open at the rear and whether or not it has a platform raised higher than the street floor level. (CMP-2)

Signaling Circuit. Any electrical circuit that energizes signaling equipment. (CMP-3)

Single-Pole Separable Connector. A device that is installed at the ends of portable, flexible, single-conductor cable that is used to establish connection or disconnection between two cables or one cable and a single-pole, panel-mounted separable connector. (CMP-18)

Special Permission. The written consent of the authority having jurisdiction. (CMP-1)

Stand-Alone System. A system that is capable of supplying power independent of an electric power production and distribution network. (CMP-4)

Structure. That which is built or constructed, other than equipment. (CMP-1)

Surge Arrester. A protective device for limiting surge voltages by discharging or bypassing surge current; it also prevents continued flow of follow current while remaining capable of repeating these functions. (CMP-10)

Surge-Protective Device (SPD). A protective device for limiting transient voltages by diverting or limiting surge current; it also prevents continued flow of follow current while remaining capable of repeating these functions and is designated as follows:

Type 1: Permanently connected SPDs intended for installation between the secondary of the service transformer and the line side of the service disconnect overcurrent device.

Type 2: Permanently connected SPDs intended for installation on the load side of the service disconnect overcurrent device, including SPDs located at the branch panel.

Type 3: Point of utilization SPDs.

Type 4: Component SPDs, including discrete components, as well as assemblies. (CMP-10)

Informational Note: For further information on Type 1, Type 2, Type 3, and Type 4 SPDs, see UL 1449, *Standard for Surge Protective Devices*.

Switch, Bypass Isolation. A manual, nonautomatic, or automatic operated device used in conjunction with a transfer switch to provide a means of directly connecting load conductors to a power source and of disconnecting the transfer switch. (CMP-13)

Switch, General-Use. A switch intended for use in general distribution and branch circuits. It is rated in amperes, and it is

capable of interrupting its rated current at its rated voltage. (CMP-9)

Switch, General-Use Snap. A form of general-use switch constructed so that it can be installed in device boxes or on box covers, or otherwise used in conjunction with wiring systems recognized by this *Code*. (CMP-9)

Switch, Isolating. A switch intended for isolating an electrical circuit from the source of power. It has no interrupting rating, and it is intended to be operated only after the circuit has been opened by some other means. (CMP-9)

Switch, Motor-Circuit. A switch rated in horsepower that is capable of interrupting the maximum operating overload current of a motor of the same horsepower rating as the switch at the rated voltage. (CMP-11)

Switch, Transfer. An automatic or nonautomatic device for transferring one or more load conductor connections from one power source to another. (CMP-13)

Switchboard. A large single panel, frame, or assembly of panels on which are mounted on the face, back, or both, switches, overcurrent and other protective devices, buses, and usually instruments. These assemblies are generally accessible from the rear as well as from the front and are not intended to be installed in cabinets. (CMP-9)

Switchgear. An assembly completely enclosed on all sides and top with sheet metal (except for ventilating openings and inspection windows) and containing primary power circuit switching, interrupting devices, or both, with buses and connections. The assembly may include control and auxiliary devices. Access to the interior of the enclosure is provided by doors, removable covers, or both. (CMP-9)

Informational Note: All switchgear subject to *NEC* requirements is metal enclosed. Switchgear rated below 1000 V or less may be identified as “low-voltage power circuit breaker switchgear.” Switchgear rated over 1000 V may be identified as “metal-enclosed switchgear” or “metal-clad switchgear.” Switchgear is available in non-arc-resistant or arc-resistant constructions.

Thermal Protector (as applied to motors). A protective device for assembly as an integral part of a motor or motor-compressor that, when properly applied, protects the motor against dangerous overheating due to overload and failure to start. (CMP-11)

Informational Note: The thermal protector may consist of one or more sensing elements integral with the motor or motor-compressor and an external control device.

Thermally Protected (as applied to motors). A motor or motor-compressor that is provided with a thermal protector. (CMP-11)

Ungrounded. Not connected to ground or to a conductive body that extends the ground connection. (CMP-5)

Uninterruptible Power Supply. A power supply used to provide alternating current power to a load for some period of time in the event of a power failure. (CMP-13)

Informational Note: In addition, it may provide a more constant voltage and frequency supply to the load, reducing the effects of voltage and frequency variations.

Utilization Equipment. Equipment that utilizes electric energy for electronic, electromechanical, chemical, heating, lighting, or similar purposes. (CMP-1)

Voltage (of a circuit). The greatest root-mean-square (rms) (effective) difference of potential between any two conductors of the circuit concerned. (CMP-1)

Informational Note: Some systems, such as 3-phase 4-wire, single-phase 3-wire, and 3-wire direct current, may have various circuits of various voltages.

Voltage, Nominal. A nominal value assigned to a circuit or system for the purpose of conveniently designating its voltage class (e.g., 120/240 volts, 480Y/277 volts, 600 volts). (CMP-1)

Informational Note No. 1: The actual voltage at which a circuit operates can vary from the nominal within a range that permits satisfactory operation of equipment.

Informational Note No. 2: See ANSI C84.1-2011, *Voltage Ratings for Electric Power Systems and Equipment* (60 Hz).

Informational Note No. 3: Certain battery units may be considered to be rated at nominal 48 volts dc, but may have a charging float voltage up to 58 volts. In dc applications, 60 volts is used to cover the entire range of float voltages.

Voltage to Ground. For grounded circuits, the voltage between the given conductor and that point or conductor of the circuit that is grounded; for ungrounded circuits, the greatest voltage between the given conductor and any other conductor of the circuit. (CMP-1)

Watertight. Constructed so that moisture will not enter the enclosure under specified test conditions. (CMP-1)

Weatherproof. Constructed or protected so that exposure to the weather will not interfere with successful operation. (CMP-1)

Informational Note: Rainproof, raintight, or watertight equipment can fulfill the requirements for weatherproof where varying weather conditions other than wetness, such as snow, ice, dust, or temperature extremes, are not a factor.

Part II. Over 1000 Volts, Nominal

Electronically Actuated Fuse. An overcurrent protective device that generally consists of a control module that provides current sensing, electronically derived time-current characteristics, energy to initiate tripping, and an interrupting module that interrupts current when an overcurrent occurs. Electronically actuated fuses may or may not operate in a current-limiting fashion, depending on the type of control selected. (CMP-10)

Fuse. An overcurrent protective device with a circuit-opening fusible part that is heated and severed by the passage of overcurrent through it. (CMP-10)

Informational Note: A fuse comprises all the parts that form a unit capable of performing the prescribed functions. It may or may not be the complete device necessary to connect it into an electrical circuit.

Controlled Vented Power Fuse. A fuse with provision for controlling discharge circuit interruption such that no solid material may be exhausted into the surrounding atmosphere.

Informational Note: The fuse is designed so that discharged gases will not ignite or damage insulation in the path of the

discharge or propagate a flashover to or between grounded members or conduction members in the path of the discharge where the distance between the vent and such insulation or conduction members conforms to manufacturer's recommendations.

Expulsion Fuse Unit (Expulsion Fuse). A vented fuse unit in which the expulsion effect of gases produced by the arc and lining of the fuseholder, either alone or aided by a spring, extinguishes the arc.

Nonvented Power Fuse. A fuse without intentional provision for the escape of arc gases, liquids, or solid particles to the atmosphere during circuit interruption.

Power Fuse Unit. A vented, nonvented, or controlled vented fuse unit in which the arc is extinguished by being drawn through solid material, granular material, or liquid, either alone or aided by a spring.

Vented Power Fuse. A fuse with provision for the escape of arc gases, liquids, or solid particles to the surrounding atmosphere during circuit interruption.

Multiple Fuse. An assembly of two or more single-pole fuses. (CMP-10)

Substation. An assemblage of equipment (e.g., switches, interrupting devices, circuit breakers, buses, and transformers) through which electric energy is passed for the purpose of distribution, switching, or modifying its characteristics. (CMP-9)

Switching Device. A device designed to close, open, or both, one or more electrical circuits. (CMP-1)

Circuit Breaker. A switching device capable of making, carrying, and interrupting currents under normal circuit conditions, and also of making, carrying for a specified time, and interrupting currents under specified abnormal circuit conditions, such as those of short circuit.

Cutout. An assembly of a fuse support with either a fuseholder, fuse carrier, or disconnecting blade. The fuseholder or fuse carrier may include a conducting element (fuse link) or may act as the disconnecting blade by the inclusion of a nonfusible member.

Disconnecting Means. A device, group of devices, or other means whereby the conductors of a circuit can be disconnected from their source of supply.

Disconnecting (or Isolating) Switch (Disconnecter, Isolator). A mechanical switching device used for isolating a circuit or equipment from a source of power.

Interrupter Switch. A switch capable of making, carrying, and interrupting specified currents.

Oil Cutout (Oil-Filled Cutout). A cutout in which all or part of the fuse support and its fuse link or disconnecting blade is mounted in oil with complete immersion of the contacts and the fusible portion of the conducting element (fuse link) so that arc interruption by severing of the fuse link or by opening of the contacts will occur under oil.

Oil Switch. A switch having contacts that operate under oil (or askarel or other suitable liquid).

Regulator Bypass Switch. A specific device or combination of devices designed to bypass a regulator.

Part III. Hazardous (Classified) Locations (CMP-14).

Aircraft Painting Hangar. An aircraft hangar constructed for the express purpose of spray/coating/dipping applications and provided with dedicated ventilation supply and exhaust.

Associated Apparatus. Apparatus in which the circuits are not necessarily intrinsically safe themselves but that affects the energy in the intrinsically safe circuits and is relied on to maintain intrinsic safety. Such apparatus is one of the following:

- (1) Electrical apparatus that has an alternative type of protection for use in the appropriate hazardous (classified) location
- (2) Electrical apparatus not so protected that shall not be used within a hazardous (classified) location

Informational Note No. 1: Associated apparatus has identified intrinsically safe connections for intrinsically safe apparatus and also may have connections for nonintrinsically safe apparatus.

Informational Note No. 2: An example of associated apparatus is an intrinsic safety barrier, which is a network designed to limit the energy (voltage and current) available to the protected circuit in the hazardous (classified) location, under specified fault conditions.

Associated Nonincendive Field Wiring Apparatus. Apparatus in which the circuits are not necessarily nonincendive themselves but that affect the energy in nonincendive field wiring circuits and are relied upon to maintain nonincendive energy levels. Such apparatus are one of the following:

- (1) Electrical apparatus that has an alternative type of protection for use in the appropriate hazardous (classified) location
- (2) Electrical apparatus not so protected that shall not be used in a hazardous (classified) location

Informational Note: Associated nonincendive field wiring apparatus has designated associated nonincendive field wiring apparatus connections for nonincendive field wiring apparatus and may also have connections for other electrical apparatus.

Combustible Dust. Dust particles that are 500 microns or smaller (i.e., material passing a U.S. No. 35 Standard Sieve as defined in ASTM E11-2015, *Standard Specification for Woven Wire Test Sieve Cloth and Test Sieves*), and present a fire or explosion hazard when dispersed and ignited in air.

Informational Note: See ASTM E1226-2012a, *Standard Test Method for Explosibility of Dust Clouds*, or ISO 6184-1, *Explosion protection systems — Part 1: Determination of explosion indices of combustible dusts in air*, for procedures for determining the explosibility of dusts.

Combustible Gas Detection System. A protection technique utilizing stationary gas detectors in industrial establishments.

Control Drawing. A drawing or other document provided by the manufacturer of the intrinsically safe or associated apparatus, or of the nonincendive field wiring apparatus or associated nonincendive field wiring apparatus, that details the allowed interconnections between the intrinsically safe and associated apparatus or between the nonincendive field wiring apparatus or associated nonincendive field wiring apparatus.

Cord Connector. A fitting intended to terminate a cord to a box or similar device and reduce the strain at points of termination and may include an explosionproof, a dust-ignitionproof, or a flameproof seal.

Different Intrinsically Safe Circuits. Intrinsically safe circuits in which the possible interconnections have not been evaluated and identified as intrinsically safe.

Dust-Ignitionproof. Equipment enclosed in a manner that excludes dusts and does not permit arcs, sparks, or heat otherwise generated or liberated inside of the enclosure to cause ignition of exterior accumulations or atmospheric suspensions of a specified dust on or in the vicinity of the enclosure.

Informational Note No. 1: For further information on dust-ignitionproof enclosures, see ANSI/UL 1203-2015, *Explosion-Proof and Dust-Ignition-Proof Electrical Equipment for Hazardous (Classified) Locations*.

Informational Note No. 2: Dust-ignitionproof enclosures are sometimes additionally marked Type 9 per NEMA 250-2014, *Enclosures for Electrical Equipment*.

Dusttight. Enclosures constructed so that dust will not enter under specified test conditions.

Informational Note No. 1: For further information, see ANSI/UL 121201-2017, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2 and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Informational Note No. 2: Enclosure Types 3, 3X, 3S, 3SX, 4, 4X, 5, 6, 6P, 12, 12K, and 13, per NEMA 250-2014, *Enclosures for Electrical Equipment* and ANSI/UL 50E-2015, *Enclosures for Electrical Equipment, Environmental Considerations*, are considered dust-tight.

Electrical Resistance Trace Heating “60079-30-1”. Type of protection for the purpose of producing heat on the principle of electrical resistance and typically composed of one or more metallic conductors and/or an electrically conductive material, suitably electrically insulated and protected.

Informational Note: See ANSI/UL 60079-30-1-2017, *Explosive Atmospheres — Part 30-1: Electrical Resistance Trace Heating — General and Testing Requirements*.

Encapsulation “m”. Type of protection where electrical parts that could ignite an explosive atmosphere by either sparking or heating are enclosed in a compound in such a way that this explosive atmosphere cannot be ignited.

Informational Note: See ANSI/UL 60079-18-2015, *Explosive atmospheres — Part 18: Equipment protection by encapsulation “m”*.

Explosionproof Equipment. Equipment enclosed in a case that is capable of withstanding an explosion of a specified gas or vapor that may occur within it and of preventing the ignition of a specified gas or vapor surrounding the enclosure by sparks, flashes, or explosion of the gas or vapor within, and that operates at such an external temperature that a surrounding flammable atmosphere will not be ignited thereby. (CMP-14)

Informational Note No. 1: For further information, see ANSI/UL 1203-2015, *Explosion-Proof and Dust-Ignition-Proof Electrical Equipment for Use in Hazardous (Classified) Locations*.

Informational Note No. 2: Explosionproof enclosures are sometimes additionally marked Type 7 per NEMA 250-2014, *Enclosures for Electrical Equipment*.

Flameproof “d”. Type of protection where the enclosure will withstand an internal explosion of a flammable mixture that has penetrated into the interior, without suffering damage and without causing ignition, through any joints or structural openings in the enclosure of an external explosive gas atmosphere

consisting of one or more of the gases or vapors for which it is designed.

Informational Note: See ANSI/UL 60079-1-2015, *Explosive Atmospheres — Part 1: Equipment Protection by Flameproof Enclosures “d”*.

Hermetically Sealed. Equipment sealed against the entrance of an external atmosphere where the seal is made by fusion, for example, soldering, brazing, welding, or the fusion of glass to metal.

Informational Note: For further information, see ANSI/ISA-12.12.01-2013, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Increased Safety “e”. Type of protection applied to electrical equipment that does not produce arcs or sparks in normal service and under specified abnormal conditions, in which additional measures are applied so as to give increased security against the possibility of excessive temperatures and of the occurrence of arcs and sparks.

Informational Note: See ANSI/UL 60079-7-2017, *Explosive Atmospheres — Part 7: Equipment Protection by Increased Safety “e”*.

Inherently Safe Optical Radiation “op is”. Type of protection to minimize the risk of ignition in explosive atmospheres from optical radiation where visible or infrared radiation is incapable of producing sufficient energy under normal or specified fault conditions to ignite a specific explosive atmosphere.

Informational Note: See ANSI/UL 60079-28-2017, *Explosive Atmospheres — Part 28: Protection of Equipment and Transmission Systems Using Optical Radiation*.

Intrinsic Safety “i”. Type of protection where any spark or thermal effect is incapable of causing ignition of a mixture of flammable or combustible material in air under prescribed test conditions.

Informational Note: See UL 913-2015, *Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, and III, Division 1 Hazardous (Classified) Locations*; and ANSI/UL 60079-11-2013, *Explosive Atmospheres — Part 11: Equipment protection by intrinsic safety “i”*.

Intrinsically Safe Apparatus. Apparatus in which all the circuits are intrinsically safe.

Intrinsically Safe Circuit. A circuit in which any spark or thermal effect is incapable of causing ignition of a mixture of flammable or combustible material in air under prescribed test conditions.

Informational Note: Test conditions are described in ANSI/UL 913-2013, *Standard for Safety, Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, and III, Division 1, Hazardous (Classified) Locations*.

Intrinsically Safe System. An assembly of interconnected intrinsically safe apparatus, associated apparatus, and interconnecting cables, in that those parts of the system that may be used in hazardous (classified) locations are intrinsically safe circuits.

Informational Note: An intrinsically safe system may include more than one intrinsically safe circuit.

Limited Finishing Workstation. An apparatus that is capable of confining the vapors, mists, residues, dusts, or deposits that are generated by a spray application process but does not meet the

requirements of a spray booth or spray room, as herein defined. [33:3.3.18.1]

Informational Note: See Section 14.3 of NFPA 33, *Standard for Spray Application Using Flammable or Combustible Materials*, for limited finishing workstations.

Liquid Immersion “o”. Type of protection where electrical equipment is immersed in a protective liquid in such a way that an explosive atmosphere that may be above the liquid or outside the enclosure cannot be ignited.

Informational Note: See ANSI/UL 60079-6-2016, *Explosive Atmospheres — Part 6: Equipment protection by liquid immersion “o”*.

Major Repair Garage. A building or portions of a building where major repairs, such as engine overhauls, painting, body and fender work, and repairs that require draining of the motor vehicle fuel tank are performed on motor vehicles, including associated floor space used for offices, parking, or showrooms. [30A:3.3.12.1]

Membrane Enclosure. A temporary enclosure used for the spraying of workpieces that cannot be moved into a spray booth where open spraying is not practical due to the proximity to other operations, finish quality, or concerns such as the collection of overspray.

Informational Note: See Chapter 18 of NFPA 33-2016, *Standard for Spray Application Using Flammable or Combustible Materials*, for information on the construction and use of membrane enclosures.

Minor Repair Garage. A building or portions of a building used for lubrication, inspection, and minor automotive maintenance work, such as engine tune-ups, replacement of parts, fluid changes (e.g., oil, antifreeze, transmission fluid, brake fluid, air-conditioning refrigerants), brake system repairs, tire rotation, and similar routine maintenance work, including associated floor space used for offices, parking, or showrooms. [30A:3.3.12.2]

Mobile Equipment. Equipment with electrical components suitable to be moved only with mechanical aids or is provided with wheels for movement by person(s) or powered devices.

Motor Fuel Dispensing Facility. That portion of a property where motor fuels are stored and dispensed from fixed equipment into the fuel tanks of motor vehicles or marine craft or into approved containers, including all equipment used in connection therewith. [30A:3.3.11]

Informational Note: Refer to Articles 510 and 511 with respect to electrical wiring and equipment for other areas used as lubrication rooms, service rooms, repair rooms, offices, salesrooms, compressor rooms, and similar locations.

Nonincendive Circuit. A circuit, other than field wiring, in which any arc or thermal effect produced under intended operating conditions of the equipment, is not capable, under specified test conditions, of igniting the flammable gas-air, vapor-air, or dust-air mixture.

Informational Note: Conditions are described in ANSI/ISA-12.12.01-2013, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Nonincendive Component. A component having contacts for making or breaking an incendive circuit and the contacting mechanism is constructed so that the component is incapable of igniting the specified flammable gas-air or vapor-air

mixture. The housing of a nonincendive component is not intended to exclude the flammable atmosphere or contain an explosion.

Informational Note: For further information, see ANSI/ISA-12.12.01-2013, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Nonincendive Equipment. Equipment having electrical/electronic circuitry that is incapable, under normal operating conditions, of causing ignition of a specified flammable gas-air, vapor-air, or dust-air mixture due to arcing or thermal means.

Informational Note: For further information, see ANSI/ISA-12.12.01-2013, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Nonincendive Field Wiring. Wiring that enters or leaves an equipment enclosure and, under normal operating conditions of the equipment, is not capable, due to arcing or thermal effects, of igniting the flammable gas-air, vapor-air, or dust-air mixture. Normal operation includes opening, shorting, or grounding the field wiring.

Nonincendive Field Wiring Apparatus. Apparatus intended to be connected to nonincendive field wiring.

Informational Note: For further information, see ANSI/ISA-12.12.01-2013, *Nonincendive Electrical Equipment for Use in Class I and II, Division 2, and Class III, Divisions 1 and 2 Hazardous (Classified) Locations*.

Oil Immersion. Electrical equipment immersed in a protective liquid in such a way that an explosive atmosphere that may be above the liquid or outside the enclosure cannot be ignited.

Optical Radiation. Electromagnetic radiation at wavelengths in vacuum between the region of transition to X-rays and the region of transition to radio waves, that is approximately between 1 nm and 1000 μm .

Informational Note: For additional information on types of protection that can be applied to minimize the risk of ignition in explosive atmospheres from optical radiation in the wavelength range from 380 nm to 10 μm , see ANSI/UL 60079-28-2017, *Explosive Atmospheres — Part 28: Protection of Equipment and Transmission Systems Using Optical Radiation*.

Optical System With Interlock “op sh”. Type of protection to minimize the risk of ignition in explosive atmospheres from optical radiation where visible or infrared radiation is confined inside optical fiber or other transmission medium with interlock cut-off provided to reliably reduce the unconfined beam strength to safe levels within a specified time in case the confinement fails and the radiation becomes unconfined.

Informational Note: See ANSI/UL 60079-28-2017, *Explosive Atmospheres — Part 28: Protection of Equipment and Transmission Systems Using Optical Radiation*.

Outdoor Spray Area. A spray area that is outside the confines of a building or that has a canopy or roof that does not limit the dissipation of the heat of a fire or dispersion of flammable vapors and does not restrict fire-fighting access and control. For the purpose of this standard, an outdoor spray area can be treated as an unenclosed spray area. [33:3.3.2.3.1]

Portable Equipment. Equipment with electrical components suitable to be moved by a single person without mechanical aids.

Powder Filling “q”. Type of protection where electrical parts capable of igniting an explosive atmosphere are fixed in position and completely surrounded by filling material (glass or quartz powder) to prevent the ignition of an external explosive atmosphere.

Informational Note: See ANSI/UL 60079-5-2016, *Explosive Atmospheres — Part 5: Equipment protection by powder filling “q”*.

Pressurized. The process of supplying an enclosure with a protective gas with or without continuous flow, at sufficient pressure to prevent the entrance of combustible dust or ignitable fibers/flyings.

Pressurized Enclosure “p”. Type of protection for electrical equipment that uses the technique of guarding against the ingress of the external atmosphere, which may be explosive, into an enclosure by maintaining a protective gas therein at a pressure above that of the external atmosphere.

Informational Note: See ANSI/UL 60079-2-2017, *Explosive Atmospheres — Part 2: Equipment protection by pressurized enclosures “p”*.

Process Seal. A seal between electrical systems and flammable or combustible process fluids where a failure could allow the migration of process fluids into the premises’ wiring system.

Protected Optical Fiber Cable. Optical fiber cable protected from releasing optical radiation into the atmosphere during normal operating conditions and foreseeable malfunctions by additional armoring, conduit, cable tray, or raceway.

Informational Note: See ANSI/UL 60079-28-2017, *Explosive Atmospheres — Part 28: Protection of Equipment and Transmission Systems Using Optical Radiation*.

Protected Optical Radiation “op pr”. Type of protection to minimize the risk of ignition in explosive atmospheres from optical radiation where visible or infrared radiation is confined inside optical fiber or other transmission medium under normal constructions or constructions with additional mechanical protection based on the assumption that there is no escape of radiation from the confinement.

Informational Note: See ANSI/UL 60079-28-2017, *Explosive Atmospheres — Part 28: Protection of Equipment and Transmission Systems Using Optical Radiation*.

Protection by Enclosure “t”. Type of protection for explosive dust atmospheres where electrical equipment is provided with an enclosure providing dust ingress protection and a means to limit surface temperatures.

Informational Note: For additional information, see ANSI/UL 60079-31-2015, *Explosive Atmospheres — Part 31: Equipment Dust Ignition Protection by Enclosure “t”*.

Purged and Pressurized. The process of (1) purging, supplying an enclosure with a protective gas at a sufficient flow and positive pressure to reduce the concentration of any flammable gas or vapor initially present to an acceptable level; and (2) pressurization, supplying an enclosure with a protective gas with or without continuous flow at sufficient pressure to prevent the entrance of a flammable gas or vapor, a combustible dust, or an ignitable fiber.

Informational Note: For further information, see ANSI/NFPA 496-2013, *Purged and Pressurized Enclosures for Electrical Equipment*.

Simple Apparatus. An electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5 volts, 100 mA,

and 25 mW, or a passive component that does not dissipate more than 1.3 watts and is compatible with the intrinsic safety of the circuit in which it is used.

Informational Note No. 1: The following apparatus are examples of simple apparatus:

- (1) Passive components; for example, switches, instrument connectors, plugs and sockets, junction boxes, resistance temperature devices, and simple semiconductor devices such as LEDs
- (2) Sources of stored energy consisting of single components in simple circuits with well-defined parameters; for example, capacitors or inductors, whose values are considered when determining the overall safety of the system
- (3) Sources of generated energy; for example, thermocouples and photocells, that do not generate more than 1.5 volts, 100 mA, and 25 mW

Informational Note No. 2: For further information, refer to ANSI/UL 913-2013, *Intrinsically Safe Apparatus and Associated Apparatus for Use in Class I, II, III, Division 1, Hazardous (Classified) Locations*; and ANSI/UL 60079-11-2013, *Explosive Atmospheres — Part 11: Equipment Protection by Intrinsic Safety “i”*.

Spray Area. Any fully enclosed, partly enclosed, or unenclosed area in which dangerous quantities of flammable or combustible vapors, mists, residues, dusts, or deposits are present due to the operation of spray processes, including (1) any area in the direct path of a spray application process; (2) the interior of a spray booth, spray room, or limited finishing workstation, as herein defined; (3) the interior of any exhaust plenum, eliminator section, or scrubber section; (4) the interior of any exhaust duct or exhaust stack leading from a spray application process; (5) the interior of any air recirculation path up to and including recirculation particulate filters; (6) any solvent concentrator (pollution abatement) unit or solvent recovery (distillation) unit; and (7) the inside of a membrane enclosure. The following are not part of the spray area: (1) fresh air make-up units; (2) air supply ducts and air supply plenums; (3) recirculation air supply ducts downstream of recirculation particulate filters; and (4) exhaust ducts from solvent concentrator (pollution abatement) units. [33:3.3.2.3]

Informational Note: Unenclosed spray areas are locations outside of buildings or are localized operations within a larger room or space. Such are normally provided with some local vapor extraction/ventilation system. In automated operations, the area limits are the maximum area in the direct path of spray operations. In manual operations, the area limits are the maximum area of spray when aimed at 90 degrees to the application surface.

Spray Booth. A power-ventilated enclosure for a spray application operation or process that confines and limits the escape of the material being sprayed, including vapors, mists, dusts, and residues that are produced by the spraying operation and conducts or directs these materials to an exhaust system. [33:3.3.15]

Informational Note: A spray booth is an enclosure or insert within a larger room used for spray/coating/dipping applications. A spray booth can be fully enclosed or have open front or face and can include separate conveyor entrance and exit. The spray booth is provided with a dedicated ventilation exhaust with supply air from the larger room or from a dedicated air supply.

Spray Room. A power-ventilated fully enclosed room used exclusively for open spraying of flammable or combustible materials. [33:3.3.16]

Type of Protection “n”. Type of protection where electrical equipment, in normal operation, is not capable of igniting a surrounding explosive gas atmosphere and a fault capable of causing ignition is not likely to occur.

Informational Note: See ANSI/UL 60079-15-2013, *Explosive Atmospheres — Part 15: Equipment Protection by Type of Protection “n”*.

Unclassified Locations. Locations determined to be neither Class I, Division 1; Class I, Division 2; Zone 0; Zone 1; Zone 2; Class II, Division 1; Class II, Division 2; Class III, Division 1; Class III, Division 2; Zone 20; Zone 21; Zone 22; nor any combination thereof.

Unenclosed Spray Area. Any spray area that is not confined by a limited finishing workstation, spray booth, or spray room, as herein defined. [33:3.3.2.3.2]

Ventilated. Provided with a means to permit circulation of air sufficient to remove an excess of heat, fumes, or vapors.

Volatile Flammable Liquid. A flammable liquid having a flash point below 38°C (100°F), or a flammable liquid whose temperature is above its flash point, or a Class II combustible liquid that has a vapor pressure not exceeding 276 kPa (40 psia) at 38°C (100°F) and whose temperature is above its flash point.

ARTICLE 110

Requirements for Electrical Installations

Part I. General

110.1 Scope. This article covers general requirements for the examination and approval, installation and use, access to and spaces about electrical conductors and equipment; enclosures intended for personnel entry; and tunnel installations.

Informational Note: See Informative Annex J for information regarding ADA accessibility design.

110.2 Approval. The conductors and equipment required or permitted by this *Code* shall be acceptable only if approved.

Informational Note: See 90.7, Examination of Equipment for Safety, and 110.3, Examination, Identification, Installation, and Use of Equipment. See definitions of *Approved*, *Identified*, *Labeled*, and *Listed*.

110.3 Examination, Identification, Installation, Use, and Listing (Product Certification) of Equipment.

(A) Examination. In judging equipment, considerations such as the following shall be evaluated:

- (1) Suitability for installation and use in conformity with this *Code*

Informational Note No. 1: Equipment may be new, reconditioned, refurbished, or remanufactured.

Informational Note No. 2: Suitability of equipment use may be identified by a description marked on or provided with a product to identify the suitability of the product for a specific purpose, environment, or application. Special conditions of use

or other limitations and other pertinent information may be marked on the equipment, included in the product instructions, or included in the appropriate listing and labeling information. Suitability of equipment may be evidenced by listing or labeling.

- (2) Mechanical strength and durability, including, for parts designed to enclose and protect other equipment, the adequacy of the protection thus provided
- (3) Wire-bending and connection space
- (4) Electrical insulation
- (5) Heating effects under normal conditions of use and also under abnormal conditions likely to arise in service
- (6) Arcing effects
- (7) Classification by type, size, voltage, current capacity, and specific use
- (8) Other factors that contribute to the practical safeguarding of persons using or likely to come in contact with the equipment

(B) Installation and Use. Equipment that is listed, labeled, or both shall be installed and used in accordance with any instructions included in the listing or labeling.

(C) Listing. Product testing, evaluation, and listing (product certification) shall be performed by recognized qualified electrical testing laboratories and shall be in accordance with applicable product standards recognized as achieving equivalent and effective safety for equipment installed to comply with this *Code*.

Informational Note: The Occupational Safety and Health Administration (OSHA) recognizes qualified electrical testing laboratories that perform evaluations, testing, and certification of certain products to ensure that they meet the requirements of both the construction and general industry OSHA electrical standards. If the listing (product certification) is done under a qualified electrical testing laboratory program, this listing mark signifies that the tested and certified product complies with the requirements of one or more appropriate product safety test standards.

110.4 Voltages. Throughout this *Code*, the voltage considered shall be that at which the circuit operates. The voltage rating of electrical equipment shall not be less than the nominal voltage of a circuit to which it is connected.

110.5 Conductors. Conductors used to carry current shall be of copper, aluminum, or copper-clad aluminum unless otherwise provided in this *Code*. Where the conductor material is not specified, the sizes given in this *Code* shall apply to copper conductors. Where other materials are used, the size shall be changed accordingly.

110.6 Conductor Sizes. Conductor sizes are expressed in American Wire Gage (AWG) or in circular mils.

110.7 Wiring Integrity. Completed wiring installations shall be free from short circuits, ground faults, or any connections to ground other than as required or permitted elsewhere in this *Code*.

110.8 Wiring Methods. Only wiring methods recognized as suitable are included in this *Code*. The recognized methods of wiring shall be permitted to be installed in any type of building or occupancy, except as otherwise provided in this *Code*.

110.9 Interrupting Rating. Equipment intended to interrupt current at fault levels shall have an interrupting rating at nominal circuit voltage at least equal to the current that is available at the line terminals of the equipment.

Equipment intended to interrupt current at other than fault levels shall have an interrupting rating at nominal circuit voltage at least equal to the current that must be interrupted.

110.10 Circuit Impedance, Short-Circuit Current Ratings, and Other Characteristics. The overcurrent protective devices, the total impedance, the equipment short-circuit current ratings, and other characteristics of the circuit to be protected shall be selected and coordinated to permit the circuit protective devices used to clear a fault to do so without extensive damage to the electrical equipment of the circuit. This fault shall be assumed to be either between two or more of the circuit conductors or between any circuit conductor and the equipment grounding conductor(s) permitted in 250.118. Listed equipment applied in accordance with their listing shall be considered to meet the requirements of this section.

110.11 Deteriorating Agents. Unless identified for use in the operating environment, no conductors or equipment shall be located in damp or wet locations; where exposed to gases, fumes, vapors, liquids, or other agents that have a deteriorating effect on the conductors or equipment; or where exposed to excessive temperatures.

Informational Note No. 1: See 300.6 for protection against corrosion.

Informational Note No. 2: Some cleaning and lubricating compounds can cause severe deterioration of many plastic materials used for insulating and structural applications in equipment.

Equipment not identified for outdoor use and equipment identified only for indoor use, such as “dry locations,” “indoor use only,” “damp locations,” or enclosure Types 1, 2, 5, 12, 12K, and/or 13, shall be protected against damage from the weather during construction.

Informational Note No. 3: See Table 110.28 for appropriate enclosure-type designations.

Informational Note No. 4: Minimum flood provisions are provided in NFPA 5000-2015 *Building Construction and Safety Code*, the *International Building Code (IBC)*, and the *International Residential Code for One- and Two-Family Dwellings (IRC)*.

110.12 Mechanical Execution of Work. Electrical equipment shall be installed in a neat and workmanlike manner.

Informational Note: Accepted industry practices are described in ANSI/NECA 1-2015, *Standard for Good Workmanship in Electrical Construction*, and other ANSI-approved installation standards.

(A) Unused Openings. Unused openings, other than those intended for the operation of equipment, those intended for mounting purposes, or those permitted as part of the design for listed equipment, shall be closed to afford protection substantially equivalent to the wall of the equipment. Where metallic plugs or plates are used with nonmetallic enclosures, they shall be recessed at least 6 mm ($\frac{1}{4}$ in.) from the outer surface of the enclosure.

(B) Integrity of Electrical Equipment and Connections. Internal parts of electrical equipment, including busbars, wiring terminals, insulators, and other surfaces, shall not be damaged or contaminated by foreign materials such as paint, plaster, cleaners, abrasives, or corrosive residues. There shall be no damaged parts that may adversely affect safe operation or mechanical strength of the equipment such as parts that are broken; bent; cut; or deteriorated by corrosion, chemical action, or overheating.

(C) Cables and Conductors. Cables and conductors installed exposed on the surfaces of ceilings and sidewalls shall be supported by the building structure in such a manner that the cables and conductors will not be damaged by normal building use. Such cables and conductors shall be secured by hardware including straps, staples, cable ties, hangers, or similar fittings designed and installed so as not to damage the cable. The installation shall also conform with 300.4 and 300.11. Nonmetallic cable ties and other nonmetallic cable accessories used to secure and support cables in other spaces used for environmental air (plenums) shall be listed as having low smoke and heat release properties.

Informational Note No. 1: Accepted industry practices are described in ANSI/NECA/FOA 301-2009, *Standard for Installing and Testing Fiber Optic Cables*, and other ANSI-approved installation standards.

Informational Note No. 2: See 4.3.11.2.6.5 and 4.3.11.5.5.6 of NFPA 90A-2018, *Standard for the Installation of Air-Conditioning and Ventilating Systems*, for discrete combustible components installed in accordance with 300.22(C).

Informational Note No. 3: Paint, plaster, cleaners, abrasives, corrosive residues, or other contaminants may result in an undetermined alteration of optical fiber cable properties.

110.13 Mounting and Cooling of Equipment.

(A) Mounting. Electrical equipment shall be firmly secured to the surface on which it is mounted. Wooden plugs driven into holes in masonry, concrete, plaster, or similar materials shall not be used.

(B) Cooling. Electrical equipment that depends on the natural circulation of air and convection principles for cooling of exposed surfaces shall be installed so that room airflow over such surfaces is not prevented by walls or by adjacent installed equipment. For equipment designed for floor mounting, clearance between top surfaces and adjacent surfaces shall be provided to dissipate rising warm air.

Electrical equipment provided with ventilating openings shall be installed so that walls or other obstructions do not prevent the free circulation of air through the equipment.

110.14 Electrical Connections. Because of different characteristics of dissimilar metals, devices such as pressure terminal or pressure splicing connectors and soldering lugs shall be identified for the material of the conductor and shall be properly installed and used. Conductors of dissimilar metals shall not be intermixed in a terminal or splicing connector where physical contact occurs between dissimilar conductors (such as copper and aluminum or aluminum and copper-clad aluminum), unless the device is identified for the purpose and conditions of use. Materials such as solder, fluxes, inhibitors, and compounds, where employed, shall be suitable for the use and shall be of a type that will not adversely affect the conductors, installation, or equipment.

Connectors and terminals for conductors more finely stranded than Class B and Class C stranding as shown in Chapter 9, Table 10, shall be identified for the specific conductor class or classes.