


WAGON TYPE	COMMODITY
FKA (with cable modules)	Cable Drums

Load Positioning:

Only authorised cable modules displaying special compatibility plates can be loaded.

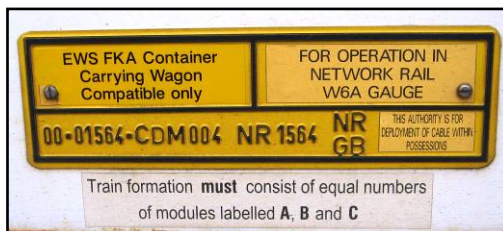

The cable module is a 40 ft unit weighing 8.5 tonnes secured by 4 spigots.



Special packing plates are provided on the spigots and in the centre of the module. The module carries up to two cables drums secured on spindles. Each cable drum can weigh up to 8 t. Spindles are retained by locking pins.

Cable drums shall be loaded centrally on the spindle with spindle spacers used as required. There are small, medium and large spacers available.



Spacers and cable drums are locked in position by the lifting brackets.

The maximum diameter drum is 2800 mm with a max width of 1750 mm.
FKA wagons have two platforms which can carry one module each over spigot positions 3 and 11



Stanchions: N/A

Bolsters: N/A

Dunnage: Spacers are used to secure different sized cable drums on the spindle. Spare spacers should be stored in the coach provided with the train.

Unsecured Loads: Not permitted.

Securing Equipment: 2 throw over straps to be positioned over the drum. These can be crossed over if required.

Special tommy bars are provided on the module.
Cable ends shall be secured by cable end anchor points.



Voids: N/A

Doors/Sides: Special steps are provided for access on and off the module.

Special Equipment: Spindle spacers
Power jumper need to be correctly coupled between modules on wagon platforms and between individual wagons.

Competency Level: LE SV

Safety:

Safety chains shall be placed across access area's when not in use.
These modules are only permitted to deploy cable whilst working under T3 Possession.
Wear P.P.E. at all times.