



BSI Standards Publication

Space engineering — Thermal design handbook

Part 11: Electrical Heating

National foreword

This Published Document is the UK implementation of CEN/CLC/TR 17603-31-11:2021.

The UK participation in its preparation was entrusted to Technical Committee ACE/68, Space systems and operations.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

This publication is not to be regarded as a British Standard.

© The British Standards Institution 2021
Published by BSI Standards Limited 2021

ISBN 978 0 539 16985 0

ICS 49.140

Compliance with a Published Document cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 August 2021.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

August 2021

ICS 49.140

English version

Space engineering - Thermal design handbook - Part 11: Electrical Heating

Ingénierie spatiale - Manuel de conception thermique -
Partie 11 : Chauffage électrique

Raumfahrttechnik - Handbuch für thermisches Design -
Teil 11: Elektrisches Heizen

This Technical Report was approved by CEN on 21 June 2021. It has been drawn up by the Technical Committee CEN/CLC/JTC 5.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



**CEN-CENELEC Management Centre:
Rue de la Science 23, B-1040 Brussels**

Table of contents

European Foreword.....	6
1 Scope.....	7
2 References	8
3 Terms, definitions and symbols	9
3.1 Terms and definitions	9
3.2 Symbols.....	9
4 Electrical heating.....	11
4.1 General.....	11
4.1.1 Conductive element	11
4.1.2 Electrical terminations	11
4.1.3 Electrical insulation	12
4.1.4 Outgassing.....	13
4.2 Space applications.....	14
4.2.1 Viking spacecraft.....	14
4.2.2 Fltsatcom spacecraft	14
4.2.3 OTS	14
4.2.4 SPOT	15
4.2.5 Miscellaneous utilization	15
4.3 Power requirement estimation	15
4.3.1 Simplification assumptions	16
4.3.2 Conduction losses.....	16
4.3.3 Radiation losses.....	16
4.3.4 Process heat requirements	16
4.3.5 Operating heat requirements.....	16
4.3.6 Warm-up heat requirements.....	17
4.4 Regulation of electrical heaters.....	17
4.4.1 Temperature sensor.....	18
4.4.2 Temperature controller	18
4.5 Existing systems.....	19

4.5.1	Minco Products Inc.....	19
4.5.2	Isopad Limited.....	28
5	Electrical cooling.....	35
5.1	General.....	35
5.1.1	Description.....	35
5.1.2	Advantages of use	35
5.1.3	Physical phenomena.....	35
5.1.4	Multi-stage thermoelectric devices	36
5.1.5	Heat dissipation	37
5.1.6	Performance characteristics.....	38
5.2	Theory	39
5.2.1	Seebeck effect	39
5.2.2	Peltier effect.....	40
5.2.3	Thomson effect	40
5.2.4	Joule effect	40
5.2.5	Fourier effect.....	40
5.3	Space applications.....	40
5.3.1	Electro-optics applications.....	41
5.3.2	Fluid refrigeration	41
5.3.3	Cooling of electronic equipment	42
5.4	Existing systems.....	42
5.4.2	Marlow Industries, Inc.	42
5.4.3	Melcor	45
	Bibliography.....	49

Figures

Figure 4-1: Temperature range of thermofoil heaters depending on insulation. From MINCO (1989a) [6]. a) Kapton/FEP, b) Kapton/FEP Al backing, c) Nomex, d) Silicone Rubber, e) Mica, f) Kapton/WA, g) Polyimide Glass, h) Polyester, i) Scrim.	13
Figure 4-2: Outgassing in a vacuum environment. Weight loss versus time. Temperature 473 K, pressure 4×10^{-4} Pa, preconditioning 50 % RH. From MINCO (1973) [5]. — : Cross-linked polyalkane; — : Silicone rubber, MIL-W-16878/7; — : MIL-W-81044/1; — : Kapton, Type HF.	14
Figure 4-3: On/Off control. Temperature versus Time. From MINCO (1989a) [6].	18
Figure 4-4: Simple proportional control. Temperature versus Time. From MINCO (1989a) [6].	19
Figure 4-5: Pattern of MINCO Standard. Thermofoil heaters. From MINCO (1989a) [6].	22

Figure 4-6: Pattern of MINCO Mica. Thermofoil heaters. Dimensions in mm. From MINCO (1989a) [6].....	22
Figure 4-7: Pattern of MINCO. Heater Kit HK913. From MINCO (1989a) [6].....	22
Figure 4-8: Clamping attachment of a MINCO Mica. Thermofoil heater. From MINCO (1989a) [6].....	24
Figure 4-9: Standard ISOPAD products. (a) ISOTAPE, (b) ISOTRACE and (c) UNITRACE. From ISOPAD (1990) [2].	33
Figure 5-1: Schematic of a thermoelectric cooling element. From Scott (1974) [10].	36
Figure 5-2: Schematic of a typical thermoelectric module assembly. Elements electrically in series and thermally in parallel. From Scott (1974) [10].....	36
Figure 5-3: Maximum temperature difference versus number of stages in a module. From MARLOW (1988) [3].....	37
Figure 5-4: Temperature distribution through a thermoelectric cooling unit. From Scott (1974) [10].....	38
Figure 5-5: Temperature difference across a typical thermoelectric cooling unit versus heat pumped. From Scott (1974) [10].....	39
Figure 5-6: Spacecraft thermal control using thermoelectric devices (TEDs). From Chapter & Johnsen (1973) [1].	41
Figure 5-7: MELCOR Thermoelectric Heat Pump Module configurations. From MELCOR (1987) [4]	47

Tables

Table 4-1: Characteristics of MINCO Thermofoil Heaters. From MINCO (1989a) [6].....	20
Table 4-2: MINCO Standard Thermofoil Heaters. Kapton, silicone rubber and Nomex insulations. From MINCO (1989a) [6]	21
Table 4-3: MINCO Standard Thermofoil Heaters. Mica Insulation. From MINCO (1989a) [6].....	21
Table 4-4: Area and Electrical Resistance of the Heaters Contained in Minco Heater Kit HK913. From MINCO (1989a) [6]	23
Table 4-5: Characteristics of Adhesives Recommended by MINCO. From MINCO (1989c) [8].....	25
Table 4-6: Specifications of MINCO Thermofoil Heaters. From MINCO (1989a) [6].....	27
Table 4-7: Characteristics of MINCO Lead wires Mounted in Kapton, Nomex and Silicone Rubber Heaters. From MINCO (1989a) [6]	28
Table 4-8: Characteristics of MINCO Lead wires mounted in Mica Heaters. From MINCO (1989a) [6].....	28
Table 4-9: Specifications of ISOPAD electrical heaters. From ISOPAD (1990).....	30
Table 5-1: Performance characteristics and dimensions of MARLOW Standard Thermoelectric Coolers. From MARLOW (1988) [3].	44
Table 5-2: MELCOR Thermoelectric Heat Pump Module Specifications. FC Series. From MELCOR (1987) [4]	46
Table 5-3: MELCOR Thermoelectric Heat Pump Module Specifications. CP Series. From MELCOR (1987) [4]	47

Table 5-4: MELCOR Wire Standards. From MELCOR (1987) [4]	48
--	----

European Foreword

This document (CEN/CLC/TR 17603-31-11:2021) has been prepared by Technical Committee CEN/CLC/JTC 5 “Space”, the secretariat of which is held by DIN.

It is highlighted that this technical report does not contain any requirement but only collection of data or descriptions and guidelines about how to organize and perform the work in support of EN 16603-31.

This Technical report (TR 17603-31-11:2021) originates from ECSS-E-HB-31-01 Part 11A .

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

This document has been developed to cover specifically space systems and has therefore precedence over any TR covering the same scope but with a wider domain of applicability (e.g.: aerospace).

1

Scope

In this Part 11, the use of electrical heaters and electrical coolers in spacecraft systems are described.

Electrical thermal control is an efficient and reliable method for attaining and maintaining temperatures. Solid state systems provide for flexibility in control of thermal regulation, they are resistant to shock and vibration and can operate in extreme physical conditions such as high and zero gravity levels. They are also easy to integrate into spacecraft subsystems.

The Thermal design handbook is published in 16 Parts

TR 17603-31-01	Thermal design handbook – Part 1: View factors
TR 17603-31-02	Thermal design handbook – Part 2: Holes, Grooves and Cavities
TR 17603-31-03	Thermal design handbook – Part 3: Spacecraft Surface Temperature
TR 17603-31-04	Thermal design handbook – Part 4: Conductive Heat Transfer
TR 17603-31-05	Thermal design handbook – Part 5: Structural Materials: Metallic and Composite
TR 17603-31-06	Thermal design handbook – Part 6: Thermal Control Surfaces
TR 17603-31-07	Thermal design handbook – Part 7: Insulations
TR 17603-31-08	Thermal design handbook – Part 8: Heat Pipes
TR 17603-31-09	Thermal design handbook – Part 9: Radiators
TR 17603-31-10	Thermal design handbook – Part 10: Phase – Change Capacitors
TR 17603-31-11	Thermal design handbook – Part 11: Electrical Heating
TR 17603-31-12	Thermal design handbook – Part 12: Louvers
TR 17603-31-13	Thermal design handbook – Part 13: Fluid Loops
TR 17603-31-14	Thermal design handbook – Part 14: Cryogenic Cooling
TR 17603-31-15	Thermal design handbook – Part 15: Existing Satellites
TR 17603-31-16	Thermal design handbook – Part 16: Thermal Protection System

2 References

EN Reference	Reference in text	Title
EN 16601-00-01	ECSS-S-ST-00-01	ECSS System - Glossary of terms
EN 16603-31-15	ECSS-E-HB-31-01 Part 15	Thermal design handbook – Part 15: Existing Satellites

All other references made to publications in this Part are listed, alphabetically, in the **Bibliography**.

Terms, definitions and symbols

3.1 Terms and definitions

For the purpose of this Standard, the terms and definitions given in ECSS-S-ST-00-01 apply.

3.2 Symbols

A	cross sectional area, [m ²]
I	electric current, [A]
L	length of conductive path, [m]
Q	heat transfer rate, [W]
Q_F	fourier effect heat flow, [W]
Q_I	joule heat flow, [W]
Q_P	peltier effect heat flow, [W]
Q_{cd}	conduction loss, [W]
Q_o	operating heat, [W]
Q_p	process heat transfer rate, [W]
Q_r	radiation loss, [W]
Q_{sl}	steady state loss, [W]
Q_w	warm-up power, [W]
R	electrical resistance, [Ω]
T_a	ambient temperature, [K]
T_f	final temperature, [K]
T_i	initial temperature, [K]

T_s	heat sink temperature, [K]
V	voltage, [V]
W	power, [W]
a	neat seebeck coefficient for two dissimilar materials, [W.K ⁻¹ .A ⁻¹]
c_p	specific heat, [J.kg ⁻¹ .K ⁻¹]
h	latent heat of fusion or vaporization, [J.kg ⁻¹]
k	thermal conductivity, [W.m ⁻¹ .K ⁻¹]
m	mass of material in each process load, [kg]
q_T	thomson effect heat flow per unit of conductor length, [W.m ⁻¹]
t	cycle time for each load, [s]
tw	desired warm-up time, [s]
ΔT	difference of temperature between two junctions formed by dissimilar materials, [K]
ΔV_s	seebeck effect open circuit potential difference, [V]
ε	emissivity of heat sink material
σ	Stefan-Boltzmann constant = 5,6697 x 10 ⁻⁸ W.m ⁻² .K ⁻⁴
τ	Thomson coefficient, [W.K ⁻¹ .A ⁻¹]

Subscripts

c	cool
h	hot
max	maximum

4

Electrical heating

4.1 General

Reliable long-term performance of most spacecraft components takes place at a specified temperature range. The attainment of some temperature range requires, in many instances, the generation of heat within the spacecraft. This involves simply turning up an electrical, chemical or nuclear heater.

When a local uniform heat source or a profiled heating area is needed, electrical heaters can provide it efficiently due to their versatility. Some applications are reported later in this clause.

Electrical heaters are based on Ohm's and Joule's laws.

Ohm's law states that the steady electric current, I , flowing through an electrical conductor is proportional to the constant voltage, V , and to the reciprocal of the electrical resistance of the conductor, R :

$$I = V/R$$

According to Joule's law, the heat released per unit time, Q , by an electrical current, I , is equal to the square of the electrical current, multiplied by the electrical resistance, R :

$$Q = I^2 R$$

Three parts can be distinguished in an electrical heater:

4.1.1 Conductive element

Made up by a metal alloy with specific properties depending on the use:

- High-strength alloys to carry mechanical stress.
- Non-magnetic materials.
- High temperature-coefficient alloys for self-regulated heaters.

4.1.2 Electrical terminations

Depending on the objectives and operating conditions of the heater, the most widely used options are:

Welded leadwire

Crimped leadwire

High-temperature wire

UL-approved wire

Solder pads

Pins and connectors
Plated through-holes
Integral flex-circuits
Flat foil leads

4.1.3 Electrical insulation

4.1.3.1 Kapton/FEP insulation

For temperature requirements less than 473 K, heaters constructed of Kapton film and FEP Teflon have been qualified (NASA S-311-79) and flight tested for space. The Kapton film used generally is $0,05 \times 10^{-3}$ m thick, with a thermal conductivity of 163 W.m^{-1} . It is used either onboard spacecraft or for simulation purposes in ground experiments. It has good flexibility and light weight; it is chemical and radiation resistant (to 10^6 rads) and present low outgassing. See Taylor (1984) [11].

Two types of Kapton laminated heater elements are manufactured:

- Coiled wire is used for resistances up to $620 \times 10^4 \Omega/\text{m}^2$. It withstands severe flexing with repeated installations and removals, because flexing does not bend the wire as it does to a printed circuit.
- Printed circuit Kapton/FEP heater is an etched nickel alloy foil with a clear amber polyimide insulation. It can be quite complex, with cutouts, void areas, and unusual shapes. Varied watt densities within the same element can be obtained by controlling the pattern.

It is the right choice for flat surfaces because heat is more efficiently transferred and, also, the foil heater can be reproduced with great precision by photographic techniques. This kind of heaters has been widely used in space applications.

Higher watt densities and greater reliability can be obtained with an aluminium foil backing: it spreads heat and eliminates hot spots due to voids in mounting adhesives.

4.1.3.2 Other insulations

Electrical heaters working in hard conditions, like temperatures over 473 K, are sheathed in metal. Alumina insulation is used to encase a spiral-wound or a straight wire resistance element within the sheath. Moisture is removed and the enclosure is helium leak tested. Electrical connections are made through a glass-to-metal seal header.

There are other kinds of foil heaters, with different insulations, but their usefulness in space applications is limited. Nevertheless, they are mentioned here:

- Nomex heaters are used as a low cost alternative to Kapton. It is radiation resistant to 106 rads, but it is not suitable for vacuum.
- Silicone rubber is a fiberglass reinforced elastomer, it may be vulcanized to heat sinks and it is resistant to many chemicals but it is not suitable for vacuum or radiation. It is used for commercial and industrial applications because of its low cost and high temperature rating compared to Kapton.
- Mica heaters are rigid, so they should be factory formed and are clamped to heat sinks with rigid backing plates, or else their layers will separate during warm-up. They can be

used in vacuum after burn in. They can withstand temperatures up to 866 K, and high watt densities, up to $1705 \times 10^3 \text{ W.m}^{-1}$.

- Kapton/WA is a clear amber polyimide film with acrylic adhesive. It is chemical and radiation resistant, with low outgassing, low cost and high resistance densities. The only problem is its narrow temperature range that limits applications over 423 K.
- Polyimide glass (Fiberglass reinforced polyimide) heaters have reduced flexibility but they have a temperature range up to 513 K and a potential for high watt densities.
- Optical grade polyester heaters have an 82 % light transmission and could be mounted in windows, lenses or between LCD and backlight, in cockpit displays and handheld terminals, in order to prevent condensation and permit cold weather operation.
- Polyester is a low cost solution for economic fabrication of large heaters.
- Scrim is an open weave fiberglass cloth for lamination inside composite structures.

Temperature range for some insulations, compared to Kapton/FEP, are represented in Figure 4-1.

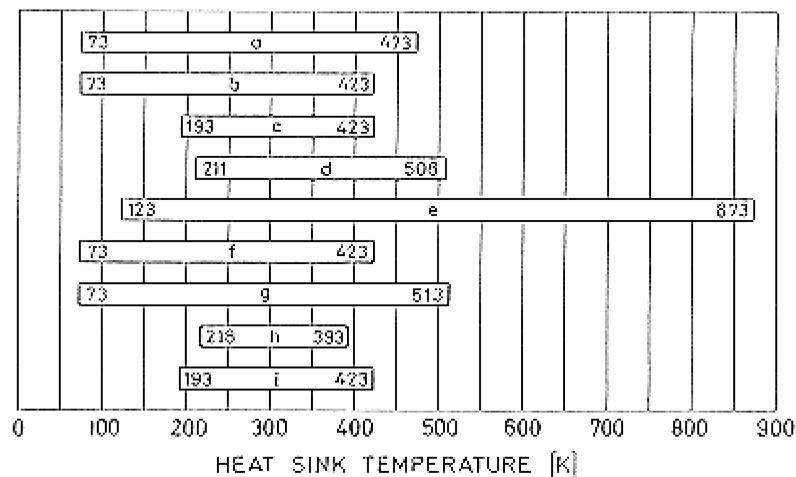


Figure 4-1: Temperature range of thermofoil heaters depending on insulation.
From MINCO (1989a) [6]. a) Kapton/FEP, b) Kapton/FEP Al backing, c) Nomex, d) Silicone Rubber, e) Mica, f) Kapton/WA, g) Polyimide Glass, h) Polyester, i) Scrim.

4.1.4 Outgassing

Outgassing in a vacuum environment, in terms of weight loss versus time is an important property in space applications, see Figure 4-2. Essentially the outgassing products are water, carbon monoxide and carbon dioxide. Loss weight in Kapton/FEP is very low, about 1 %, and it occurs during the first few hours of test.

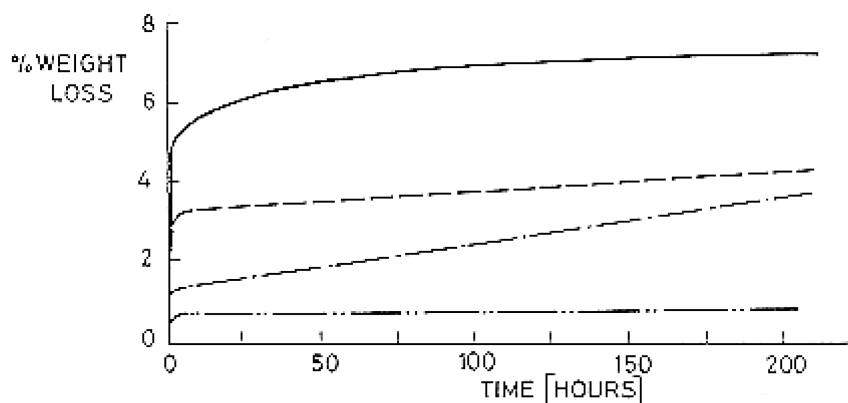


Figure 4-2: Outgassing in a vacuum environment. Weight loss versus time.
 Temperature 473 K, pressure 4×10^{-4} Pa, preconditioning 50 % RH. From MINCO (1973) [5]. — : Cross-linked polyalkane; - - : Silicone rubber, MIL-W-16878/7; - . - : MIL-W-81044/1; . . . : Kapton, Type HF.

4.2 Space applications

Electrical heaters have had a widespread gamut of uses. Some of them are mentioned in this clause.

4.2.1 Viking spacecraft

Thermostatically controlled electric heaters were used in the lander body to:

- Maintain the propulsion systems over hydrazine freezing point (275 K) and, at the same time, maintain the cavity around the lander body at a relatively low temperature to prevent overheating of the lander internal equipment during the pre-separation checkout operation.

- Accurate temperature control in critical parts of the biology and gas chromatograph/mass spectrometer experiments.
- Pyrolyze Martian soil samples.
- Heat external meteorology instruments and semi-external but insulated cameras.

From Tracey, Morey and Gorman (1978) [12].

4.2.2 Fltsatcom spacecraft

This satellite is essentially a constant power dissipation spacecraft, therefore this dissipation is produced by the electronic units within the spacecraft and sufficient heaters are provided to substitute for each component which might be turned off and maintain temperatures above established minimum levels.

From Reeves (1979) [9].

4.2.3 OTS

Electrical heaters are used as battery heaters, in the Traveling Wave Tube Amplifier as compensation heaters, and in the hydrazine tank, lines and valves, in order to prevent hydrazine from freezing.

See [ECSS-E-HB-31-01 Part 15, clause 5](#).