PD IEC TR 62998-2:2020

BSI Standards Publication

Safety of machinery

Part 2: Examples of application

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

National foreword

This Published Document is the UK implementation of IEC TR 62998-2:2020.

The UK participation in its preparation was entrusted to Technical Committee MCE/3, Safeguarding of machinery.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2020
Published by BSI Standards Limited 2020

ISBN 978 0 539 04835 3

ICS 13.110; 21.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 April 2020.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

IEC TR 62998-2

Edition 1.0 2020-04

TECHNICAL REPORT

colour inside

Safety of machinery – Part 2: Examples of application

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 13.110; 21.020

ISBN 978-2-8322-7975-5

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 7
2 Normative references 7
3 Terms, definitions and abbreviated terms 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 8
4 Applications for mobile robots 8
4.1 General 8
4.2 SRSS on mail transport mobile robot 9
4.2.1 Intended use 9
4.2.2 SRSS performance class determination 10
4.2.3 SRS limits of use and SRSS function 10
4.2.4 Safety-related requirements 11
4.2.5 Object classes and physical properties 12
4.2.6 Sensing zones 13
4.2.7 Dependability under environmental influences 15
4.2.8 Safety-related information 16
4.2.9 Verification and validation 17
4.2.10 Information for use of the SRSS 18
4.3 SRSS on cleaning mobile robot 19
4.3.1 Intended use 19
4.3.2 SRSS performance class determination 20
4.3.3 SRS limits of use and SRSS function 20
4.3.4 Safety-related requirements 21
4.3.5 Object classes and physical properties 22
4.3.6 Sensing zones 23
4.3.7 Dependability under environmental influences 24
4.3.8 Safety-related information 24
4.3.9 Verification and validation 25
4.3.10 Information for use of the SRSS 26
5 Application for container handling equipment for harbour logistics 27
5.1 General 27
5.2 SRSS for CHE 28
5.2.1 Intended use 28
5.2.2 SRS limits of use and SRSS function 29
5.2.3 SRSS performance class determination 30
5.2.4 Safety-related requirements 31
5.2.5 Object classes and physical properties 31
5.2.6 Sensing zones 32
5.2.7 Dependability under environmental influences 34
5.2.8 Safety-related information 34
5.2.9 SRSS performance class after fusion 34
5.2.10 Verification and validation 34
5.2.11 Information for use of the SRSS 35
Bibliography 37

AVA Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

Figure 1 – Outdoor scene 8
Figure 2 – Mobile robot with 2 distinctive safety-related zones 10
Figure 3 – Combination of three SRSs into an SRSS and SRSS functions 11
Figure 4 – Mounting positions and sensing zones of the SRS and safety-related zones of SRSS 14
Figure 5 – Mounting positions and sensing zones of the SRS and safety-related zones of SRSS 14
Figure 6 – Examples of measurement data for evaluation of coverage interval 17
Figure 7 – Test setup 18
Figure 8 – CHE application 28
Figure 9 – Operation areas of CHE 29
Figure 10 – SRSS structure and safety-related functions 30
Figure 11 – Safety-related zones of SRSS 32
Figure 12 – Mounting positions and sensing zones of the SRS, and safety-related zones of the SRSS 33

Table 1 – Safety-related requirements 12
Table 2 – Example of confidence information for SRS 17
Table 3 – Information for use of the SRSS 19
Table 4 – Safety-related requirements 22
Table 5 – Information for use of the SRSS 27
Table 6 – Safety-related requirements 31
Table 7 – Environmental limits of SRSS 34
Table 8 – Information for use of the SRSS 36

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SAFETY OF MACHINERY –

Part 2: Examples of application

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 62998-2, which is a Technical Report, has been prepared by IEC technical committee TC 44: Safety of machinery – Electrotechnical aspects.

The text of this Technical Report is based on the following documents:

Enquiry draft	Report on voting
44/849/DTR	44/865A/RVDTR

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

Documents
Document Sharing Hub

This document is to be used in conjunction with IEC TS 62998-1:2019.

A list of all parts in the IEC 62998 series, published under the general title *Safety of machinery*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

reconfirmed,

withdrawn,

replaced by a revised edition, or

amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

INTRODUCTION

Safety-related sensors are applied to machinery presenting a risk of personal injury. They provide protection by causing the machine to revert to a safe condition before a person can be placed in a hazardous situation.

IEC TS 62998-1:2019 is intended for use by safety-related sensor manufacturers and integrators of safety-related sensors for the design of safety-related sensor systems used for the protection of persons.

This document gives guidance for manufacturers and integrators on the application of IEC TS 62998-1:2019.

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

SAFETY OF MACHINERY –

Part 2: Examples of application

1 Scope

This document establishes guidance for the application of IEC TS 62998-1:2019.

It provides examples of:

– application for which SRS/SRSS are relevant,
– use of SRS/SRSS information from an application point of view,
– fusion of SRS into SRSS for given applications, and
– appropriate information for use for given applications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC TS 62998-1:2019, *Safety of machinery – Safety-related sensors used for protection of persons*

3 Terms, definitions and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1 Terms and definitions

3.1.1
mobile robot
robot able to travel under its own control

[SOURCE: ISO 8373:2012, 2.13, modified – The note has been omitted.]

3.1.2
robot
actuated mechanism programmable in two or more axes with a degree of autonomy, moving within its environment, to perform intended tasks

[SOURCE: ISO 8373:2012, 2.6, modified – Notes 1 and 2 have been omitted.]

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

3.2 Abbreviated terms

CHE container-handling equipment

ALARP as low as reasonably practical

LiDAR light detection and ranging

MOR meteorological optical range

TOF time of flight

SLAM Simultaneous Localization and Mapping

SRS safety-related sensor

SRSS safety-related sensor system

SCS safety-related control system

4 Applications for mobile robots

4.1 General

This example covers the integration and installation phase using fusion of three SRSs into an SRSS in accordance with Clause 6 of IEC TS 62998-1:2019 to improve sensing zones and safety-related zones in accordance with requirements for the intended use. The intended uses are 2 different mobile robot types, in accordance with ISO 13482:2014, that operate autonomously in a public area with limited access. The reader should be aware that the following descriptions are not based on comprehensive analysis and are only examples for mobile robotics.

NOTE ISO 13482:2014 covers mobile robots operating in an autonomous manner. For simplification, the term "mobile robot" will be used from now on.

Two different mobile robots operate on a certain university campus with buildings to achieve:

transport of in-house mail items among office buildings of the university, and

cleaning of pavements of the university.

Figure 1 shows the typical outdoor pavement of a university campus. Person(s) being present or approaching the safety related zone(s) of an SRSS should be detected and the safety-related control system should initiate appropriate reaction of the mobile robot.

IEC

Figure 1 – Outdoor scene

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

4.2 SRSS on mail transport mobile robot

4.2.1 Intended use

The intended use should be determined (see 6.2.1 of IEC TS 62998-1:2019) by the integrator. It is defined by the following selected example items:

1) The mobile robot is a Type 1.1 robot specified in ISO 13482:2014 with a weight of 30 kg and size of length: 500mm × width: 500mm × height: 600mm.
2) The mobile robot automatically navigates the pavement connecting the university office buildings. The path of the robot is predetermined according to the map created by SLAM technology [1][1] and physical constraints. The map includes position information for objects that are fixed along the pavement, such as guardrails, building walls, trees, etc. By referring to the map, the robot determines its own restricted space (ISO 13482:2014, 3.18.2) while moving.
3) The mobile robot moves during daytime on non-carriageways where:
   a) light vehicles such as bicycles are not allowed to enter;
   b) wheelchairs can enter;
   c) pavements are smooth paved with slopes of up to 5 degrees in some areas, as shown in Figure 1;
   d) standing or walking people on the pavements are adults and/or children. Children under and including 3 years are assumed to be controlled and children from 4 years up to including 10 years are assumed to be accompanied by adults. An adult might not accompany children over 10 years up to 14. For the purpose of this example, the speed of a person towards the mobile robot is assumed to be between 0 mm/s and 800 mm/s if the person enters into the safeguarded zone.

   NOTE The speed in this example deviates from ISO 13855:2010 under the assumption of different human behaviour in this application. For other applications, faster or slower speeds might be more appropriate. On the campus, people are informed by organizational measures and warning signals that running is not allowed in the areas where mobile robots are present. Other examples of properties are given in 4.2.4.
4) The mobile robot:
   a) is intended to make a protective stop when a standing or walking person comes into the protective stop zone (see Figure 2);
   b) is intended to reduce the speed when a standing or walking person moves into the safeguarded zone (see Figure 2);
   c) is driven with a speed up to 700 mm/s reduced by the safety related speed control function down to 300 mm/s;
   d) can reduce speed within 0,5 s from 700 mm/s to 300 mm/s, and another 0,2 s to reduce to zero speed;
   e) is intended to be used in the daytime.
5) The outdoor environmental conditions during operation:
   a) can be up to 10 mm/h precipitation;
   b) can have light interference representing daytime.

[1] Numbers in square brackets refer to the Bibliography.

Documents
Document Sharing Hub

Full document details: PD IEC TR 62998-2:2020

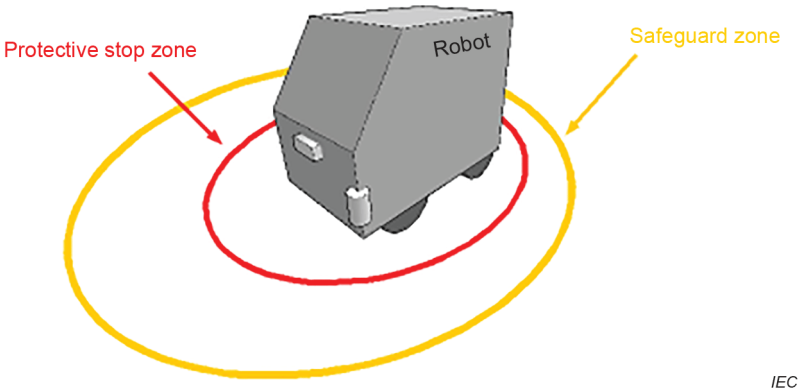

The mobile robot has two distinctive zones, in accordance with ISO 13482:2014. The protective stop zone, where the mobile robot performs a protective stop, and the safeguarded zone, where a safety-related speed control function is performed when a safety-related object is detected. In accordance with IEC TS 62998-1:2019, the protective stop zone and safeguarded zone would be safety-related zone(s).

Figure 2 – Mobile robot with 2 distinctive safety-related zones

4.2.2 SRSS performance class determination

In the chosen approach, using ISO 13482:2014 the required performance level of the safety functions of a Type 1.1 mobile robot is PL b, in accordance with ISO 13849-1:2015. The safety functions include the protective stop function, the safety-related speed control function, the hazardous collision avoidance function, and the travel surface detection function in accordance with ISO 13482:2014, which will be initiated by the SRSS.

The required performance class of the SRSS corresponding to PL b is the sensor performance class B specified in IEC TS 62998-1:2019.

4.2.3 SRS limits of use and SRSS function

The SRSS consists of three SRSs defined by the manufacturer as follows (see Figure 3).

1. SRS1: a 2D LiDAR suitable to be used up to PL b, in accordance with ISO 13849-1:2015, which allows the detection of persons and other safety-related objects and the measurement of their positions and velocities with high accuracy. The systematic capabilities are assessed in accordance with IEC TS 62998-1:2019. The sensing zone is up to a radius of 7 000 mm, and a viewing angle of 270°. The detection capability is given for safety-related objects with the properties: minimum size 40 mm × 40mm; minimum object reflectivity 5 %; maximum object speed 1 600 mm/s. The response time is 0,05 s. Use in indoor and outdoor environmental conditions is possible within defined limits.
2. SRS2: a TOF camera suitable to be used up to PL b, in accordance with ISO 13849-1:2015, which allows detecting parts of 3D volumes of persons, road surface, and other safety-related objects using 3D imaging technology. The systematic capabilities are assessed in accordance with IEC TS 62998-1:2019. SRS2 is capable of measuring the position and velocity of objects within the 3D sensor coordinate system. The sensing zone is up to 4 000 mm and vertical and horizontal field of views angle of 60° and 70°, respectively. The detection capability is given for safety-related objects with properties: minimum size 40 mm × 40 mm × 40 mm; minimum object reflectivity 5 %; maximum object speed 1 600 mm/s. The response time is 0,05 s. It is possible to distinguish a paved road surface and other objects three-dimensionally. Use in indoor and outdoor environmental conditions is possible within defined limits.
3. SRS3: the same specification as SRS1.

Documents
Document Sharing Hub
Full document details: PD IEC TR 62998-2:2020