PD ISO/TR 23437:2020

BSI Standards Publication

Solid biofuels — Bridging behaviour of bulk biofuels

Documents
Document Sharing Hub

Full document details: PD ISO/TR 23437:2020

National foreword

This Published Document is the UK implementation of ISO/TR 23437:2020.

The UK participation in its preparation was entrusted to Technical Committee PTI/17, Solid biofuels.

A list of organizations represented on this committee can be obtained on request to its committee manager.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2020
Published by BSI Standards Limited 2020

ISBN 978 0 539 01800 4

ICS 27.190; 75.160.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 September 2020.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD ISO/TR 23437:2020

TECHNICAL REPORT

ISO/TR 23437

First edition
2020-08

Solid biofuels — Bridging behaviour of bulk biofuels

Reference number
ISO/TR 23437:2020(E)

Documents
Document Sharing Hub

© ISO 2020

Full document details: PD ISO/TR 23437:2020

COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub

Full document details: PD ISO/TR 23437:2020

Contents

Page

Foreword ... **iv**
Introduction ... **v**
1 Scope ... **1**
2 Normative references ... **1**
3 Terms and definitions ... **1**
4 Part I: Proposed method for direct determination of bridging behaviour ... **3**
4.1 Introduction to the method ... 3
4.2 Principle ... 3
4.3 Test equipment ... 4
4.4 Sampling and sample preparation ... 5
4.5 Procedure ... 5
4.6 Calculation ... 6
4.7 Precision and bias ... 6
4.8 Test reporting ... 7
5 Part II: Implementing the measuring principle ... **7**
5.1 Review of apparatus construction ... 7
5.2 Other equipment ... 14
5.3 Measurement performance ... 15
6 Part III: Experience and results from bridging tests ... **17**
6.1 General ... 17
6.2 Performance characteristics of bridging test method ... 18
6.2.1 General ... 18
6.2.2 Sensitivity analysis on testing accuracy ... 18
6.2.3 Reproducibility (interlaboratory test results) ... 18
6.2.4 Repeatability ... 19
6.3 Characterization of selected biomass fuels ... 19
6.4 Influencing factors on bridging ... 20
6.5 Outlook ... 23
Bibliography ... **24**

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 238, *Solid biofuels*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020

Introduction

In all particulate matter that is flowing through an opening, the particles have the tendency to form a solid bridge over that opening. This can cause interruptions or failures, particularly during a vertical transport, with the consequence of clogging of silo outlets, hoppers, down pipes, funnels or screw conveyors. To understand this phenomenon better, a determination test method was developed. The results of these tests can be used to improve the design of handling systems in order to minimize the risk of bridging.

Bridging is a phenomenon that can occur because of the inhomogeneous nature of the biofuel, particularly the variation in particle size, moisture content and number of overlong particles. In addition, biofuels are often not well understood by the designers of handling, storage and conversion systems. Bridging phenomenon can lead to an alternating build-up and collapse of bridges or shafts, often called ratholes (see also Figure 1).

Comprehensive studies referring to the bridging behaviour of solid biomass fuels were first performed by Mattsson[1] and by Mattsson and Kofman[3] in the early 1990s. They considered the basic handling characteristics of solid biofuels, i.e. the angle of repose, the friction of solid biofuels against surfaces and the tendency to build bridges over an opening. As these parameters had until then never been investigated with solid biomass fuels, new measuring principles and devices had to be developed. For determining the bridge building tendency, a test apparatus was constructed consisting of a movable floor which could be gradually opened so that a bridge of fuel could form over the opening until it finally collapsed[1]. Various fuels were tested and the impact of key parameters such as bed depth, moisture content of the fuels and size distribution of the particles were studied.

The test method was further developed as part of the European Project Bionorm 2[15]. The objective was to develop a mechanically improved apparatus to overcome deficiencies related to the inclination of the flexible floor and by assuring constant and reproducible low bending radiuses at the edges of the slot opening. At the same time, a new drive system for a moving floor was also developed, which allows for a more sensitive and dynamic adjustment of the opening speed during measurement[5]. Best practice guidelines[6] for the revised method were also developed and tested, and an international interlaboratory test was performed[7].

The Bionorm 2 project also had the objective of providing detailed descriptions and procedures based on the applied measurement principle. The intention was to establish a useful starting point for any future attempt to develop a harmonized standard method for direct determination of bridging behaviour. In order to document the extensive research and experimental work conducted, this document describes the main outcome.

Bridging behaviour cannot be defined as an absolute value for a particular biofuel since the propensity for bridging varies with moisture content, particle size distribution and content of overlong particles. In existing product specifications of biofuels, bridging characteristics are not normally provided for trade purposes due to variability from sample to sample. However, susceptibility to bridging has been identified as useful for the engineering design of handling and storage facilities, and their relationship to effective transportation of biofuels and safety.

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020

Documents
Document Sharing Hub

Solid biofuels — Bridging behaviour of bulk biofuels

1 Scope

This document summarizes current knowledge concerning a test method and its technical implementation, and existing knowledge about the bridging performance of biofuels.

The document consists of three parts, as follows:

— Part I: Method for direct determination of bridging behaviour, to make it available for research and development purposes (see Clause 4).

— Part II: Implementing the measurement principle, to assist in the construction of test apparatus and to illustrate the performance of a bridging test (see Clause 5).

— Part III: Experience and results from bridging tests, to provide typical results on bridging for a wide range of biofuels already tested (see Clause 6).

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

3.1
bridging
tendency of particles to form a stable arch across an opening and to hinder flow

Note 1 to entry: Bridging is illustrated in Figure 1 (left).

Note 2 to entry: As a consequence of bridging, biofuel conveying can be inhibited or intermittent until the bridge collapses. All particles regardless of size can potentially form an arch. Bridging is caused by a number of phenomena, including mechanical interlocking and interacting adherence forces between particles. Accumulation of material of various sizes and moisture content can create clusters, which causes incoherent flow. Friction between the material and containing walls can cause asymmetrical flow pattern resulting in bridging. The distribution of particles of various sizes when filling a silo tends to concentrate heavier particles at the circumference (rolling down the slope) while finer particles accumulate in the centre of the pile. During the draining of a silo, the material in the centre will have a different flow pattern than the material coming from the circumference of the pile. This can in some cases result in shafts or channels or “ratholes” as illustrated in Figure 1. The phenomena can be avoided by proper design of the handling system.

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020

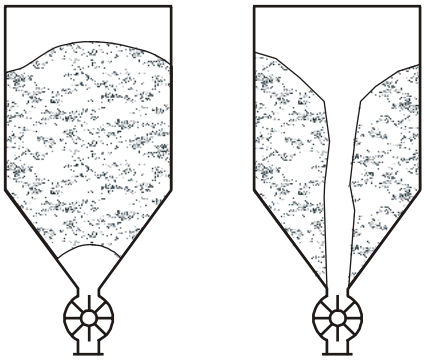

Figure 1 — Unfavourable flowing conditions of bulk fuels can cause the building of a bridge (left) or a channel flow (right)

3.2
angle of repose
steepest angle of descent of a stock pile measured in degrees of the slope of material relative to the horizontal plane when granular material on the slope face is on the verge of sliding

3.3
particle shape factor
PSF
reciprocal of the sphericity, which characterizes the degree of a particle's approximation of an ideal sphere

Note 1 to entry: When measured by image analysis, the PSF is the measured circumference of the projection area of a particle divided by the circumference of a circle with the same area as the particle. In the case of a perfect sphere shape (round projection area), the PSF of the particle is PSF = 1,0. A high PSF characterizes a high deviation from a round shape[9].

3.4
length–diameter ratio
LD
ratio of a particle calculated from the maximum length and the minimum *Feret diameter* (3.5)

Note 1 to entry: When measured by image analysis, the LD is calculated from the maximum length as given in Figure 2 and the minimum Feret diameter[14].

3.5
Feret diameter
caliper diameter
distance between two parallel planes restricting a particle

Note 1 to entry: The minimum Feret diameter is the shortest of such distances (see Figure 2).

© ISO 2020 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020

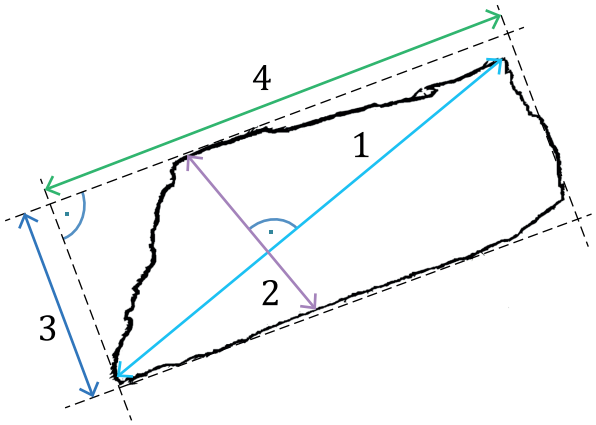

Key

1 maximum length
2 maximum width
3 minimum Feret diameter
4 length (90° to minimum Feret diameter)

Figure 2 — Important size parameters of a particle determined by image analysis

3.6
mean particle size
MP
size of a particle defined as the maximum length as measured of each particle in a sample

Note 1 to entry: In the calculation of MP, all particles in a sample are considered according to their relative volumetric share in their respective size class; this is done by calculating the weighted average. Mathematically MP is derived as the sum of all multiplications between the mean size class and the relative share of particles in this particular size class. The mean size class is calculated from the defined class boundaries (e.g. the mean size class of the fraction between 8 mm to 16 mm is 12 mm)[9].

Note 2 to entry: In this definition, MP is determined by image analysis.

4 Part I: Proposed method for direct determination of bridging behaviour

4.1 Introduction to the method

Based on prior knowledge, as described in Part II (see Clause 5), a practical research method for direct determination of bridging behaviour was developed through the European Bionorm 2 project. This clause describes the method, which is based on previous research performed in Sweden and Denmark[1][2][3][4]. The method is suitable for all compressed and uncompressed particulate biofuels that either have been reduced in size (such as most wood biofuels, including cut straw) or have a particulate physical form (e.g. olive stones, nut shells, grain).

4.2 Principle

A sample is subjected to a bridging test by placing it over an expandable slot in order to allow the building of a bridge. The opening width of the slot (see slot opening width *l* in Figure 3) is recorded as a measure of the bridge building behaviour of that sample. This requires a frictionless opening of the bottom slot.

© ISO 2020 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TR 23437:2020