

AEROSPACE INFORMATION REPORT

SAE AIR1590A

Issued 1984-11
Reaffirmed 2007-01
Cancelled 2008-12

Superseded by ARP1590

Recommended Part Numbering Guidelines for Fluid System Components Inch System of Measurements

RATIONALE

AIR1590 should be cancelled and replaced by ARP1590. ARP1590 is an already active and released document available to the industry.

CANCELLATION NOTICE

This document has been declared "CANCELLED" as of December 2008 and has been superseded by ARP1590. By this action, this document will remain listed in the Numerical Section of the Aerospace Standards Index noting that it is superseded by ARP1590.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2008 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

Full document details: [SAE AIR1590A](#)

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AIR1590A>

Documents

Document Sharing Hub

1.0 PURPOSE

THIS STANDARD PRESENTS A RECOMMENDED PART NUMBERING SCHEME FOR FLUID SYSTEM COMPONENT PARTS WHICH MAY REQUIRE COMPLEX STANDARD NUMBERS. STANDARDIZING ON CERTAIN NUMBERING SYSTEMS PROVIDES FOR NUMBERING SIMPLICITY, EASE OF INTERCHANGEABILITY AND SUPERSESSION (WHEN REQUIRED) AND STANDARDIZATION AND LIMITATION OF USABLE CODES WITHIN A FIFTEEN-CHARACTER LIMITATION.

2.0 SCOPE

2.1 THIS STANDARD CONSIDERS THE PART NUMBERING SYSTEM FOR HOSE ASSEMBLIES, FITTINGS, AND CLAMPS. OTHER COMPONENT TYPES COULD BE ADDED LATER.

2.1.1 EACH COMPONENT TYPE HAS ESTABLISHED STANDARD CODES WHICH ARE UNIQUE TO THAT TYPE AND CANNOT BE INTERCHANGED WITH OTHER COMPONENT TYPES.

2.2 THE RECOMMENDATIONS SHOWN HEREIN ARE BASED ON THE INCH SYSTEM OF MEASUREMENT. FOR RECOMMENDATIONS BASED ON THE METRIC SYSTEM OF MEASUREMENT, SEE (TBD).

3.0 CONSTRUCTION OF PART NUMBERS

3.1 PART NUMBER CONSTRUCTION SHOULD BE AS SIMPLE AS POSSIBLE. IF PART NUMBERS BECOME VERY COMPLEX, SEPARATION INTO MORE THAN ONE STANDARD SHOULD BE CONSIDERED.

3.2 SIGNIFICANT CODING IN PART NUMBERS SHOULD BE AVOIDED, UNLESS PRECEDENCE HAS BEEN ESTABLISHED, AND STANDARDIZED CODING IS AVAILABLE HEREIN.


3.2.1 PART NUMBERS WITHOUT SIGNIFICANT CODING MAY BE ESTABLISHED FOR ANY PART EVEN THOUGH STANDARDIZED CODING IS AVAILABLE HEREIN.

3.3 THE PART NUMBER CONSTRUCTION SHOULD BE THE BASIC STANDARD NUMBER FOLLOWED BY A DASH NUMBER (WHICH CAN BE FINITE) OR A SERIES OF ALTERNATE LETTER AND NUMBER CODES REQUIRED TO DIFFERENTIATE AND DEFINE ALL PARTS AVAILABLE ON THE STANDARD.


3.3.1 IT IS RECOMMENDED THAT THE BASIC STANDARD NUMBER BE SEVEN (7) DIGITS IN LENGTH EVEN THOUGH THE PART NUMBER EXAMPLES SHOWN HEREIN ALLOW A HIGHER MAXIMUM NUMBER OF DIGITS.

3.3.2 IF A FINITE DASH NUMBER IS USED, IT SHOULD BE TWO (2) DIGITS IN LENGTH UNLESS THE SCOPE OF THE STANDARD REQUIRES MORE THAN TWO DIGITS TO IDENTIFY ALL THE VARIATIONS CONTAINED ON THE STANDARD.

3.3.3 EXAMPLE OF A SIMPLE PART NUMBER

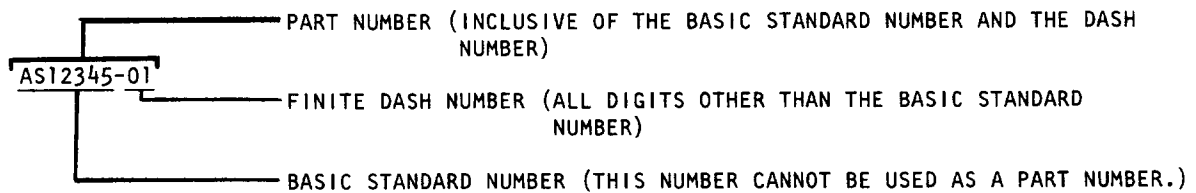

3.3.4 EXAMPLE OF A COMPLEX PART NUMBER

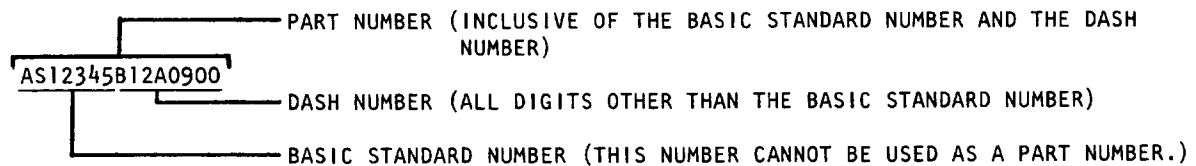

3.4 WHENEVER POSSIBLE, A DASH SHOULD BE USED TO SEPARATE FINITE NUMBERS FROM EACH OTHER (IN LIEU OF A SPACE) BUT SHOULD NOT BE USED TO SEPARATE LETTER CODES FROM NUMBERS. RUNNING NUMBER OF LETTER CODES CONSECUTIVELY SHOULD BE AVOIDED BUT IS NOT PROHIBITED. (SEE 4.2.3.1 AND 4.2.3.2.)

3.4.1 IF CONSECUTIVE NUMBER CODES OR LETTER CODES ARE USED, NO MORE THAN FOUR (4) SUCCESSIVE LETTER CODES OR NUMBER CODES SHALL BE USED, AND ADJACENT CODES SHALL NOT BE AMBIGUOUS IN MEANING.

3.5 WHEN ESTABLISHING A NEW BASIC SERIES OF NUMBERING, ISSURANCE OF THE SHORT BASIC STANDARD NUMBER SERIES SHOULD BE LIMITED TO THOSE PARTS REQUIRING LONG, COMPLEX DASH NUMBERS AND JUSTIFY THEIR USE TO STAY WITHIN THE 15-DIGIT LIMITATION. TYPICAL FLUID SYSTEM PARTS REQUIRING THIS WOULD BE HOSE ASSEMBLIES AND REDUCER/EXPANDER TEE FITTINGS.

EXAMPLE: BASIC STANDARD NUMBERS AS1 THRU AS999 SHOULD BE RESERVED FOR USE IN THIS MANNER.

3.6 EXAMPLES OF CODED PART NUMBERS

AS12345B12A090
AS12345-12A090
AS12345-12-090
AS12345B-A090
AS12345BA090

3.7 LIMITATIONS

3.7.1 LETTERS "I", "O", "Q", "X", AND "Z" SHALL NOT BE USED. LETTERS SHALL BE UPPER CASE (CAPITALIZED).

3.7.2 NUMBERS SHALL BE ARABIC NUMERALS. FRACTIONAL, DECIMAL, AND ROMAN NUMERALS SHALL NOT BE USED.

3.7.3 BLANK SPACES ARE NOT PERMITTED.

3.7.4 SYMBOLS SUCH AS PARENTHESIS (), ASTERISK *, DEGREE °, PLUS +, AND MINUS - SHALL NOT BE USED EXCEPT WHEN REFERENCING THE GOVERNMENT OR INDUSTRY DOCUMENT WHOSE IDENTIFICATION CONTAINS SUCH A SYMBOL.

3.7.5 THE TOTAL LENGTH OF THE PART NUMBER INCLUDING THE DASH NUMBER SHALL NOT EXCEED 15 CHARACTERS.

3.7.6 THE DASH NUMBER SHALL HAVE THE SAME CHARACTERISTICS AS THE BASIC STANDARD NUMBERS AND MAY BE COMPOSED OF NUMBERS, LETTERS, OR ANY COMBINATION THEREOF.

3.7.7 PART NUMBERS SHALL NOT INCLUDE THE STANDARD REVISION LETTER.

4.0 RECOMMENDATIONS FOR COMPLEX NUMBER REQUIREMENTS

THE FOLLOWING PARAGRAPHS ARE PART NUMBERING RECOMMENDATIONS FOR CERTAIN TYPES OF PARTS WHERE INCONSISTENCIES AND PROBLEMS IN DEVELOPMENT OF PART NUMBERS ARE KNOWN TO EXIST.

NOTE: FOR VERY SPECIAL PARTS, CONSIDERATION SHOULD BE GIVEN TO ESTABLISHING INDIVIDUAL DRAWINGS FOR EACH PART NUMBER.

4.1 STANDARD NUMBERING SYSTEM FOR HOSE ASSEMBLIES

4.1.1 GENERAL CODES

THE FOLLOWING OPTION CODES, SLEEVING CODES, NUMERIC SIZE CODES, LETTER SIZE CODES, LENGTH CODES, AND ANGULAR ORIENTATION CODES ARE ESTABLISHED STANDARDS FOR USE IN CONSTRUCTION OF SIGNIFICANT PART NUMBERS.

USAGE OF THESE CODES IS NOT MANDATORY IF A NON-SIGNIFICANT PART NUMBERING DISCIPLINE IS USED.

4.1.1.1 OPTION CODES

HOSE ASSEMBLIES HAVING AT LEAST ONE STRAIGHT END FITTING SHALL HAVE OPTION CODE LETTERS TO BE USED IN THE PART NUMBER AS FOLLOWS:

<u>CODE LETTER</u>	<u>OPTION</u>
L	DRILLED FOR LOCKWIRING
N	DRY FILM LUBRICATED
H	BOTH LOCKWIRING AND DRY FILM LUBRICANT PROVISIONS

BECAUSE OF PART NUMBER LENGTH LIMITATIONS, THESE OPTION CODES ARE NOT AVAILABLE FOR HOSE ASSEMBLIES WITH TWO ELBOW END FITTINGS. SEPARATE STANDARDS FOR THESE PROVISIONS WOULD BE NECESSARY IN THIS CASE.

4.1.1.2 SLEEVING CODES

SLEEVING CODE LETTERS FOR EACH PART STANDARD SHALL BE SELECTED FROM ARP1785, "STANDARD CODES FOR SLEEVING ON PTFE HOSE ASSEMBLIES."

4.1.1.3 SIZE CODES

HOSE ASSEMBLY SIZE CODES SHALL BE NUMERIC FOR HOSE ASSEMBLIES HAVING AT LEAST ONE STRAIGHT END FITTING AND, BECAUSE OF PART NUMBER LENGTH LIMITATIONS, ALPHABETICAL FOR DOUBLE ELBOW ASSEMBLIES OR ASSEMBLIES REQUIRING END FITTING ORIENTATION.

4.1.1.3.1 NUMERIC SIZE CODES

SIZES ARE CODED IN 1/16THS OF AN INCH. SIZES SMALLER THAN 5/8 SHALL HAVE THE NUMBER PRECEDED BY A ZERO.

EXAMPLE: 08 = 1/2 INCH FITTING.