


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5330						
	RATIONALE THIS DOCUMENT HAS BEEN CANCELLED AND REPLACED BY AS83485.						
AMS-R-83485/1	CANCELLATION NOTICE THIS SPECIFICATION HAS BEEN DECLARED "CANCELLED" BY THE AEROSPACE MATERIALS DIVISION, SAE, AS OF JUNE 2015 AND HAS BEEN SUPERSEDED BY AS83485. THE REQUIREMENTS OF THE LATEST ISSUE OF AS83485 SHALL BE FULFILLED WHENEVER REFERENCE IS MADE TO THE CANCELLED AMS-R-83485/1. BY THIS ACTION, THIS DOCUMENT WILL REMAIN LISTED IN THE NUMERICAL SECTION OF THE INDEX OF AEROSPACE MATERIAL SPECIFICATIONS, NOTING THAT IT HAS BEEN SUPERSEDED BY AS83485. CANCELLED SPECIFICATIONS ARE AVAILABLE FROM SAE.						
	SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AMSR83485/1A THIRD ANGLE PROJECTION 						
CUSTODIAN: AMS COMMITTEE "CE"							
<table border="1" style="width: 100%;"> <tr> <td rowspan="2" style="text-align: center;">  </td> <td style="text-align: center;">AMS SPECIFICATION</td> <td rowspan="2" style="text-align: center;"> AMS-R-83485/1 SUPERSEDED BY AS83485 </td> <td rowspan="2" style="text-align: center;"> REV. A </td> </tr> <tr> <td style="text-align: center;"> RUBBER, FLUOROCARBON ELASTOMER, IMPROVED PERFORMANCE AT LOW TEMPERATURES, O-RINGS, SIZES AND TOLERANCES </td> </tr> </table>				AMS SPECIFICATION	AMS-R-83485/1 SUPERSEDED BY AS83485	REV. A	RUBBER, FLUOROCARBON ELASTOMER, IMPROVED PERFORMANCE AT LOW TEMPERATURES, O-RINGS, SIZES AND TOLERANCES
	AMS SPECIFICATION	AMS-R-83485/1 SUPERSEDED BY AS83485		REV. A			
	RUBBER, FLUOROCARBON ELASTOMER, IMPROVED PERFORMANCE AT LOW TEMPERATURES, O-RINGS, SIZES AND TOLERANCES						

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-R-83485/1, NOTICE 3, AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-R-83485/1, NOTICE 3. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

	AMS SPECIFICATION	AMS-R-83485/1 SHEET 1 OF 8	REV. A
	RUBBER, FLUOROCARBON ELASTOMER, IMPROVED PERFORMANCE AT LOW TEMPERATURES, O-RINGS, SIZES AND TOLERANCES		



Documents

Document Sharing Hub

The complete requirements for procuring the o-ring described herein shall consist of this document and the issue in effect of Specification MIL-R-83485 (USAF).



Purpose: The purpose of this specification sheet is to set up a standardized part numbering system for o-rings procured to MIL-R-83485 (USAF).

Intended Use. These o-rings are recommended for use in packing glands as specified in MIL-G-5514.


Part Numbers. When this document is used for procurement of o-rings, part numbers shall consist of the following:

- 1. The letter M and the specification sheet number.
- 2. A dash followed by the appropriate dash number from Table I or Table II.

Example 1
M83485/1-214



Example 2
M83485/1-340

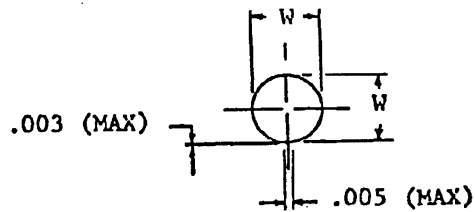

	AMS SPECIFICATION	AMS-R-83485/1 SHEET 2 OF 8	REV. A
	RUBBER, FLUOROCARBON ELASTOMER, IMPROVED PERFORMANCE AT LOW TEMPERATURES, O-RINGS, SIZES AND TOLERANCES		