


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. D	FEDERAL SUPPLY CLASS	
	RATIONALE THIS NONCURRENT STANDARD HAS BEEN STABILIZED.	
SAE AS100004	STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
	SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS100004D THIRD ANGLE PROJECTION 	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION:
	AEROSPACE STANDARD GASKET - TYPE XIII ENGINE ACCESSORY DRIVE	SAE AS100004 REV. D 

ISSUED 1952-02 REVISED 1967-11 NONCURRENT 1995-05 REAFFIRMED NONCURRENT 2006-10 STABILIZED 2013-01

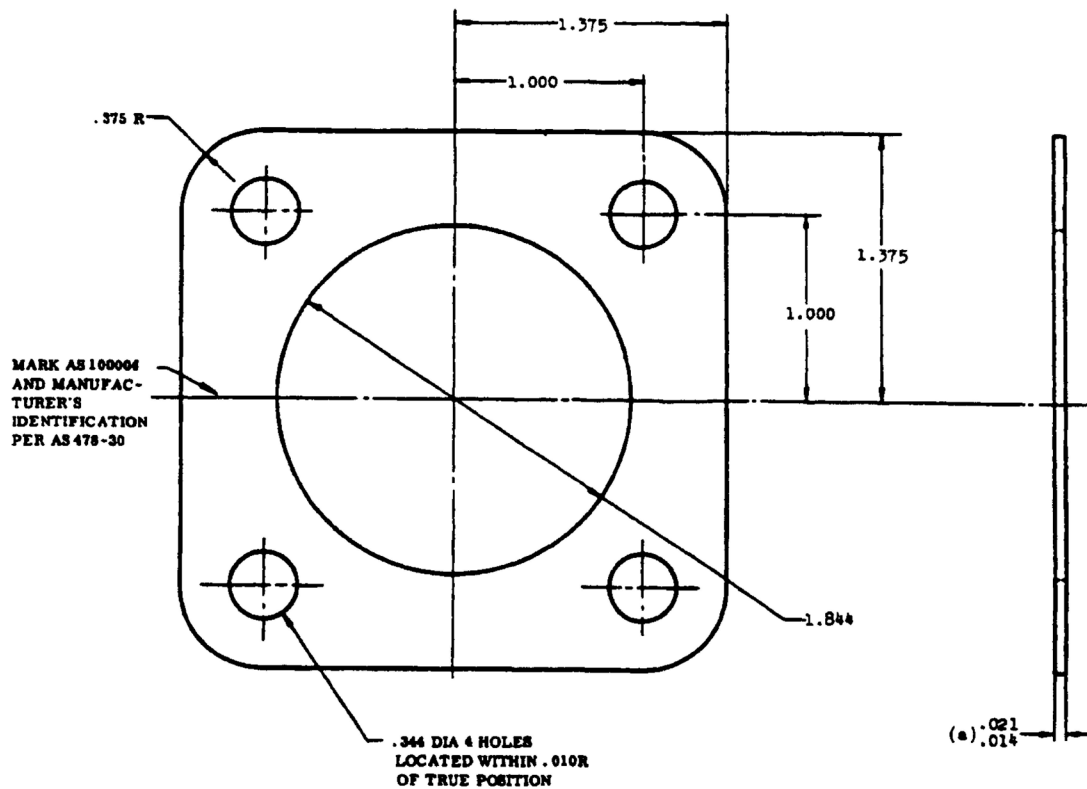


FIGURE 1

NOTES:

1. (a) NOTE: COMPRESSIBILITY OF MATERIAL IS BASED ON .016 BASIC THICKNESS.
2. MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232.
3. EDGES SHALL BE CLEAN CUT.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS $\pm .010$, LINEAR DIMENSIONS FOR LOCATING HOLES ARE BASIC.
5. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.
6. INACTIVE FOR NEW DESIGN AFTER 1 OCT 1967 USE MS9137.

SAE Aerospace An SAE International Group	AEROSPACE STANDARD GASKET - TYPE XIII ENGINE ACCESSORY DRIVE	SAE AS100004 SHEET 1 OF 1	REV. Documents Document Sharing Hub
--	---	-------------------------------------	--