

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. THIS STANDARD HAS BEEN STABILIZED. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		FEDERAL SUPPLY CLASS
			AS100016 THRU AS100025
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS100016A		THIRD ANGLE PROJECTION 	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: NONE	
		AEROSPACE STANDARD LOCKWIRE, BRASS	
		AS100016 THRU AS100025	REV. A

ISSUED 1951-08 REAFFIRMED 2007-06 STABILIZED 2014-07

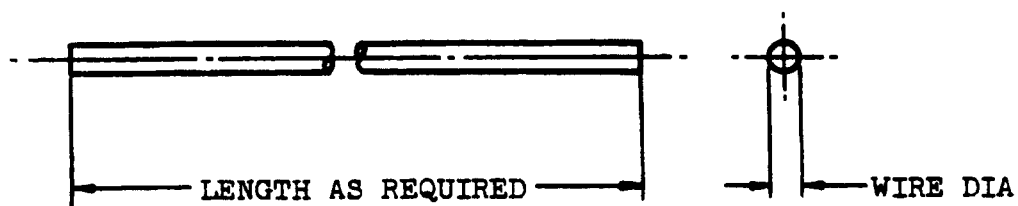


FIGURE 1

TABLE 1

WIRE DIAMETER	FT/LB APPROX	PART NO.
.025 ± .001	554	AS100017
.032 ± .002	338	AS100018
.040 ± .002	217	AS100019
.051 ± .002	133	AS100020

NOTES:

1. MATERIAL: BRASS AMS 4712.
2. WHEN LOCKWIRE IS SUPPLIED IN ACCORDANCE WITH THIS DRAWING, THE SPECIFIED DIAMETER TOLERANCES SUPERSEDE THOSE IN THE MATERIAL SPECIFICATION.
3. DO NOT USE UNASSIGNED PART NUMBERS.

	AEROSPACE STANDARD	AS100016 THRU AS100025 SHEET 1 OF 1	REV. A
	LOCKWIRE, BRASS		



Documents

Document Sharing Hub