

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS123451™ THRU
AS123600™

RATIONALE

FIGURE 1 RE-DRAWN, C DIMENSION RE-IDENTIFIED AS "APPROXIMATE", ADD NOTE FOR DISPOSITION OF EXISTING INVENTORY, DELETE ORIGINAL NOTES 7 AND 8 (REDUNDANT), GENERAL EDITORIAL UPDATES AND CLARIFICATIONS.

AS123451C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD AN123451 THRU AN123600 REVISION 4, NOTICE 1. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

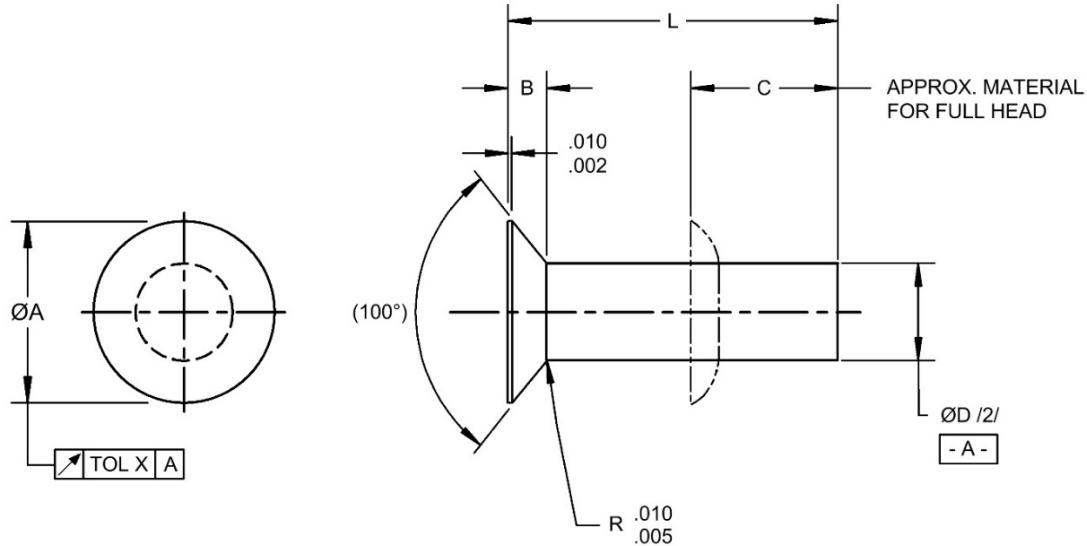



FIGURE 1 - RIVET

TABLE 1 - DIMENSIONS

NOMINAL SIZE $\varnothing$	$\varnothing A$	B	C APPROX	$\varnothing D / 2$	X TOL
.062	.099-.107	.019-.023	.112	.061-.063	.010
.094	.164-.172	.033-.037	.169	.093-.095	.010
.125	.210-.218	.039-.043	.225	.123-.126	.010
.156	.272-.280	.052-.056	.281	.154-.157	.015
.188	.337-.347	.067-.071	.338	.186-.189	.015
.250	.460-.470	.092-.096	.450	.248-.252	.020
.312	.548-.558	.103-.107	.561	.310-.314	.020
.375	.678-.688	.131-.135	.675	.373-.377	.020

For more information on this standard, visit
<https://www.sae.org/standards/content/AS123451C/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7229



AEROSPACE STANDARD

RIVET, SOLID, 100° FLUSH HEAD, HIGH
TEMPERATURE, 347 CRES, UNS S34700

AS123451™ THRU
AS123600™
SHEET 1 OF 4

REV.
C

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Tel: +1 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 2 - DIMENSIONS AND PART NUMBERS

L ±.010	Ø .062 PART NUMBER	Ø .094 PART NUMBER	Ø .125 PART NUMBER	Ø .156 PART NUMBER
.125	AN123451			
.156	AN123460			
.188	AN123452	AN123468		
.219	AN123461	AN123479		
.250	AN123453	AN123469		
.281	AN123462	AN123480		
.312	AN123454	AN123470	AN123486	AN123502
.344	AN123463	AN123481	AN123533	AN123584
.375	AN123455	AN123471	AN123487	AN123503
.406	AN123464	AN123482	AN123534	AN123585
.438	AN123456	AN123472	AN123488	AN123504
.469	AN123465	AN123483	AN123535	AN123586
.500	AN123457	AN123473	AN123489	AN123505
.531	AN123466	AN123484	AN123536	AN123587
.562	AN123458	AN123474	AN123490	AN123506
.594	AN123467	AN123485	AN123547	AN123588
.625	AN123459	AN123475	AN123491	AN123507
.656		AN123499	AN123548	AN123589
.688		AN123500	AN123549	AN123590
.719		AN123501	AN123550	AN123591
.750		AN123476	AN123492	AN123506
.781		AN123515	AN123551	AN123592
.812		AN123516	AN123552	AN123593
.844		AN123517	AN123553	AN123594
.875		AN123477	AN123493	AN123509
.906		AN123518	AN123554	AN123595
.938		AN123531	AN123563	AN123596
.969		AN123532	AN123564	AN123597
1.000		AN123478	AN123494	AN123510
1.031			AN123565	AN123596
1.062			AN123566	AN123599
1.094			AN123567	AN123600
1.125			AN123495	AN123511
1.156			AN123568	
1.188			AN123569	
1.219			AN123570	
1.250			AN123496	AN123512
1.281			AN123571	
1.312			AN123579	
1.344			AN123580	
1.375			AN123497	AN123513
1.406			AN123581	
1.438			AN123582	
1.469			AN123583	
1.500			AN123498	AN123514

	AEROSPACE STANDARD	AS123451™ THRU AS123600™ SHEET 2 OF 4	REV. C
	RIVET, SOLID, 100° FLUSH HEAD, HIGH TEMPERATURE, 347 CRES, UNS S34700		



Documents

Document Sharing Hub