

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS1737

FEDERAL SUPPLY CLASS
4730

RATIONALE

AS1737C HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.


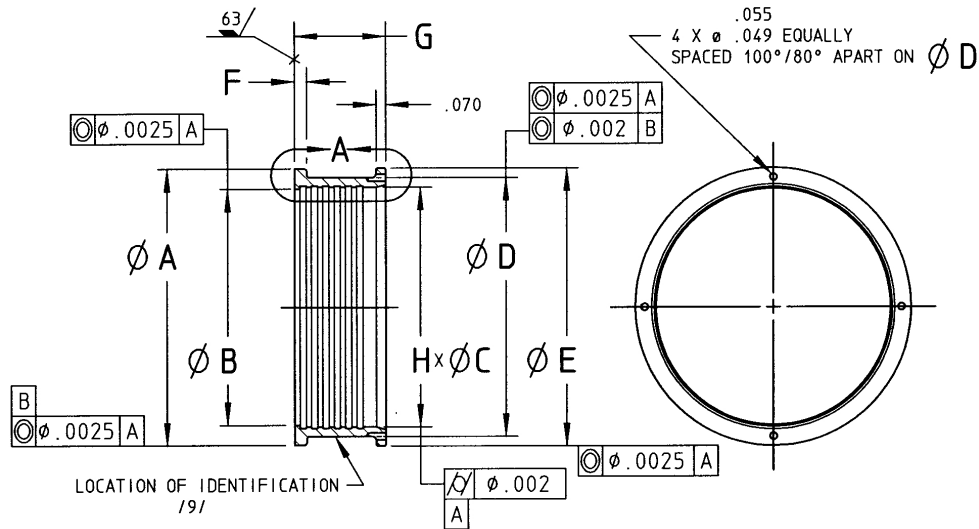


FIGURE 1 - FERRULE

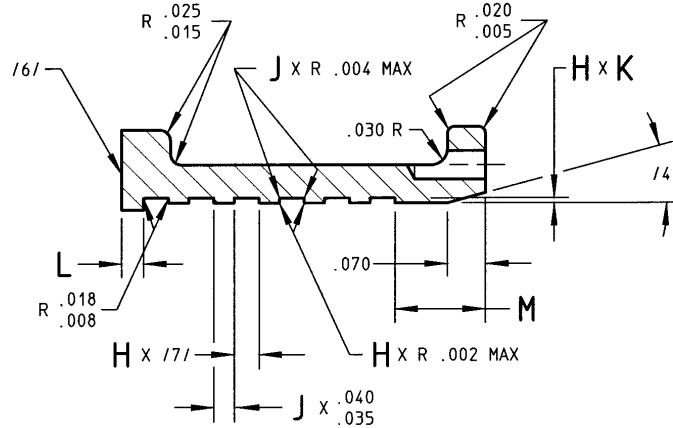


ENLARGED VIEW A

FIGURE 1 - FERRULE

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS1737C>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3A

PROCUREMENT SPECIFICATION: /3/ AS1730



AEROSPACE STANDARD

FERRULE, COUPLING, RIGID, FIXED CAVITY
THREADED, FERRULE TYPE TUBE ENDS

AS1737
SHEET 1 OF 4

REV.
C

Documents

Copyright 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - FERRULE DIMENSIONS AND WEIGHTS

BASIC NO. AS1737 SIZE CODE /16/	(TUBE SIZE)	A +.005 -.000	B +.005 -.000	C	C TOL	D +.005 -.000	E +.000 -.008
04	.250	.513	.233	.254	+.005/- .000	.375	.515
05	.312	.566	.295	.316	+.005/- .000	.437	.577
06	.375	.621	.358	.379	+.005/- .000	.500	.640
08	.500	.746	.483	.504	+.005/- .000	.625	.765
10	.625	.884	.609	.630	+.005/- .000	.750	.890
12	.750	1.014	.734	.755	+.005/- .000	.890	1.030
16	1.000	1.263	.985	1.005	+.005/- .000	1.142	1.282
20	1.250	1.513	1.235	1.256	+.005/- .000	1.392	1.532
24	1.500	1.762	1.480	1.506	+.005/- .000	1.642	1.782
28	1.750	2.024	1.730	1.756	+.005/- .000	1.895	2.035
32	2.000	2.274	1.981	2.006	+.005/- .000	2.145	2.285
36	2.250	2.524	2.231	2.257	+.005/- .000	2.395	2.535
40	2.500	2.778	2.481	2.507	+.005/- .000	2.645	2.785
44	2.750	3.024	2.731	2.757	+.005/- .000	2.895	3.035
48	3.000	3.369	2.979	3.007	+.005/- .000	3.145	3.285
56	3.500	3.869	3.479	3.509	+.005/- .000	3.645	3.785
64	4.000	4.369	3.979	4.009	+.005/- .000	4.155	4.295
72	4.500	4.869	4.479	4.509	+.006/- .000	4.655	4.795
80	5.000	5.352	4.979	5.009	+.006/- .000	5.155	5.295

TABLE 1 CONTINUED - FERRULE DIMENSIONS AND WEIGHTS

BASIC NO. AS1737 SIZE CODE /16/	F +.010 -.000	G	H PLCS GROOVES	J PLCS LANDS	K DEPTH	K TOL	L ±.005	M +.020 -.010	ALUM WEIGHT LB/EA APPROX REF
04	.060	.585	5	4	.008	+.002/- .000	.040	.165	.005
05	.060	.585	5	4	.008	+.002/- .000	.040	.165	.005
06	.060	.585	5	4	.008	+.002/- .000	.040	.165	.006
08	.060	.585	5	4	.008	+.002/- .000	.040	.165	.008
10	.060	.585	5	4	.008	+.002/- .000	.040	.165	.009
12	.060	.585	5	4	.008	+.002/- .000	.040	.165	.012
16	.060	.585	5	4	.008	+.002/- .000	.040	.165	.016
20	.060	.585	5	4	.008	+.002/- .000	.040	.165	.020
24	.060	.670	6	5	.008	+.002/- .000	.040	.165	.026
28	.090	.670	6	5	.008	+.002/- .000	.040	.165	.032
32	.090	.670	6	5	.008	+.002/- .000	.040	.165	.036
36	.090	.670	6	5	.008	+.002/- .000	.040	.165	.040
40	.090	.670	6	5	.008	+.002/- .000	.040	.165	.045
44	.090	.670	6	5	.008	+.002/- .000	.040	.165	.049
48	.090	.670	6	5	.008	+.002/- .000	.040	.165	.058
56	.090	.670	6	5	.014	+.002/- .000	.040	.165	.065
64	.090	.670	5	4	.014	+.002/- .000	.080	.200	.075
72	.090	.823	7	6	.020	+.004/- .000	.080	.185	.099
80	.090	.823	7	6	.020	+.004/- .000	.080	.185	.108



AEROSPACE STANDARD

FERRULE, COUPLING, RIGID, FIXED CAVITY
THREADED, FERRULE TYPE TUBE ENDS

AS1737

SHEET 2 OF 4

REV.

C



Documents

Document Sharing Hub