

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS1911™

FEDERAL SUPPLY CLASS
4720

RATIONALE

ADD INTEGRAL FIRESLEEVE CUFF DIMENSIONS; ADD INTEGRAL ABRASION SLEEVE "M" CODE; ADD CONFIGURATION FOR A NEW "N" CODE THIN WALL INTEGRAL FIRESLEEVE (15 MINUTE); ADD 5 MINUTE FIRESLEEVE MATERIAL CODES; REMOVED AS1624 FROM FIGURE 1; REVISED QPL NOTE PER LATEST STANDARD (NOTE 13); ADDED G SLEEVE CODE.

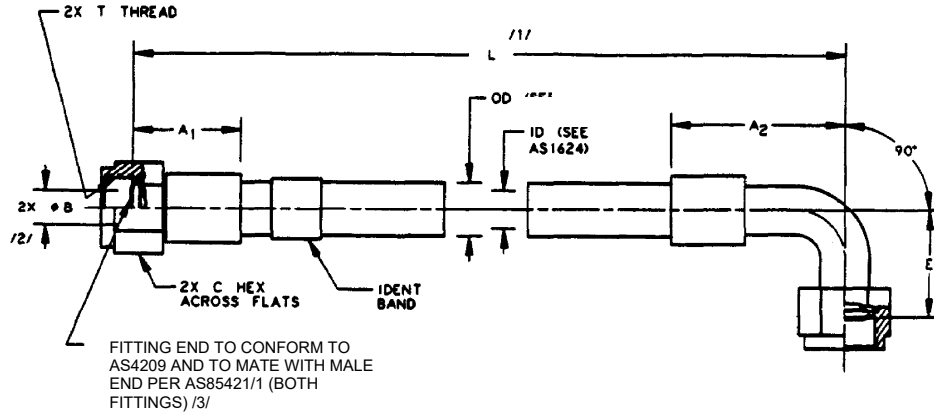


FIGURE 1 - HOSE AND FITTING DIMENSIONS




FIGURE 2 - FITTINGS
(ENLARGED VIEW)


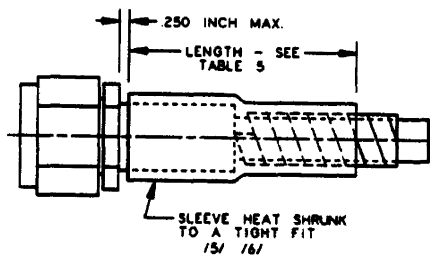


FIGURE 3 - ABRASION SLEEVE RETENTION

For more information on this standard, visit
<https://www.sae.org/standards/content/AS1911D/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS1339 /13/



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE,
CRES REINFORCED, 400 °F, 3000 PSI, LIGHTWEIGHT,
BEAM SEAL, STRAIGHT TO 90°

AS1911™
SHEET 1 OF 6

REV.
D

Documents




FIGURE 4 - ALTERNATE ELBOW CONFIGURATION /21/

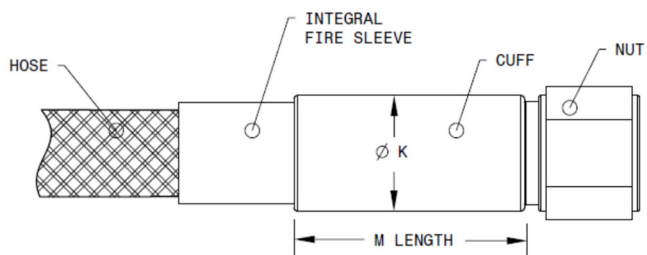


FIGURE 5 - INTEGRAL FIRESLEEVE CUFF DIMENSIONS - SEE TABLE 7 /27/

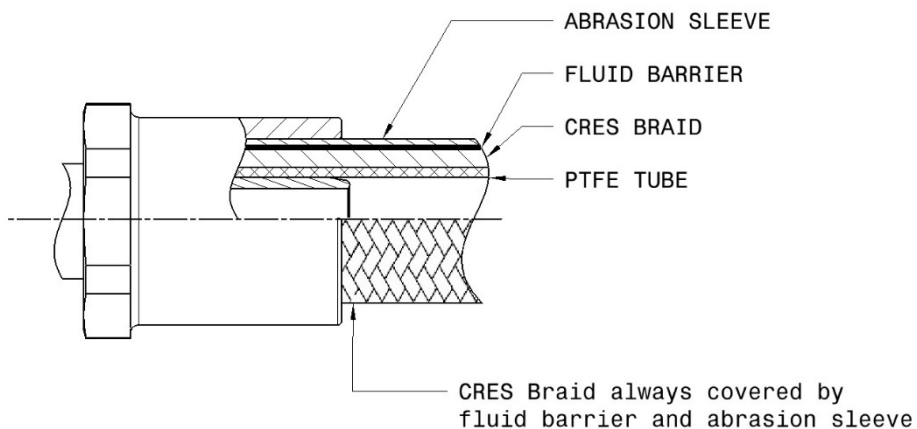


FIGURE 6 - FITTING CAPTURED INTEGRAL ABRASION SLEEVE WITH FLUID BARRIER /28/

	AEROSPACE STANDARD		AS1911™ SHEET 2 OF 6	REV. D
	HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, CRES REINFORCED, 400 °F, 3000 PSI, LIGHTWEIGHT, BEAM SEAL, STRAIGHT TO 90°			





Documents

Document Sharing Hub