

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
G

AS21151™

RATIONALE

FEDERAL SUPPLY CLASS
3110

DOCUMENT UPDATED TO CORRECT FIGURE 1 PART CONFIGURATION "A" AND "C" DUE TO INCORRECTLY PLACED EXTENSION LINES AND CORRECT TABLE 1 MISSING DIMENSION IN COLUMN "A" FOR DASH NUMBERS 4 AND 5. TABLE 1 FONT INCREASED TO 8 PT FOR CLARITY. CADMIUM NOTE DEFINITION ADDED.

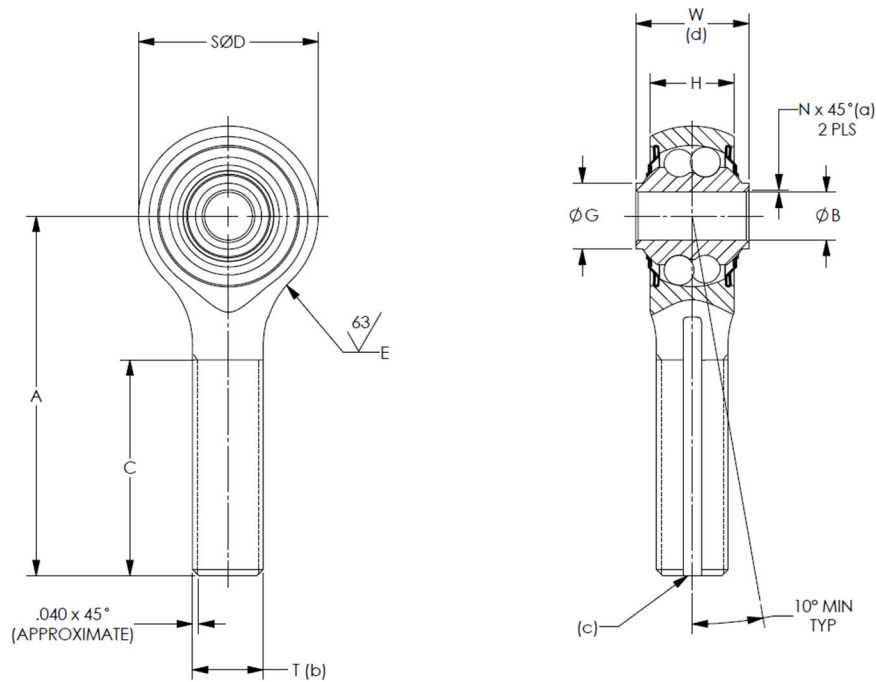



FIGURE 1 - PART CONFIGURATION

TABLE 1 - DIMENSIONS AND TOLERANCES

MS21151 DASH NUMBER (c)	BORE SIZE NOM	A ±.010	ØB +.0000 -.0003	C ±.031	ØD ±.010	E NOM	H ±.010	N +.015 -.000	ØG MIN	T THREAD UNJF-3A	W +.000 -.005	WT POUNDS APPROX
-1	3/16	1.375	.1900	.750	.781	.422	.328	.005	.276	.1900-32 LH	.437	.04
-2		2.031		1.313	.969	.500	.407		.299	.1900-32 RH	.500	
-3		1.375		.750	.781	.390	.328		.276	.3750-24 RH	.437	.05
-4		1.812		.938		.562	.438		.307	.3750-24 LH	.500	
-5		1.563		1.000		.344	.328		.276	.2500-28 RH	.437	.10
-6	1/4	1.875	.2500	1.125	.938	.469	.438	.015	.340	.3750-24 RH	.593	.10
-7		2.438	.3125	1.563	1.250	.500	.656		.501	.3750-24 LH	.870	
-8	5/16	2.750	.6250	1.500	2.000	.500	.938	.015	.875	.6250-18 RH	1.125	.24
-9												
-10												
-11	5/8							.015				.71
-12												
-13												

For more information on this standard, visit
<https://www.sae.org/standards/content/AS21151G/>

THIRD ANGLE PROJECTION



CUSTODIAN: ACBG

PROCUREMENT SPECIFICATION: AS6039



AEROSPACE STANDARD

BEARING, BALL, ROD END, DOUBLE ROW,
PRECISION, EXTERNAL THREAD, SELF-ALIGNING,
AIRFRAME, TYPE II, -65 TO 300 °F

AS21151™
SHEET 1 OF 3

REV.
G

Documents

Copyright © 2025 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Tel: +1 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 2 - ENGINEERING DATA

MS21151 DASH NUMBER (c)	RADIAL STRENGTH		AXIAL STRENGTH		RADIAL LOAD RATING 10000 COMPLETE 90° CYCLES (e) (f)		MAXIMUM STARTING TORQUE
	LIMIT LOAD LBF	FRACTURE LOAD LBF	LIMIT LOAD LBF	FRACTURE LOAD LBF	CASE I	CASE II	
							IN-OZ
-1	1000	1500	200	300	1000	1000	3.0
-2							
-3							
-4							
-5	1000	1500	200	300	1000	1000	3.0
-6							
-7							
-8	1720	2580	345	520	1720	1720	4.0
-9							
-10	2920	4375	585	880	2920	2600	6.0
-11							
-12							
-13	7090	10600	1420	2130	6160	5340	8.0

REQUIREMENTS:

- (a) A RADIUS GIVING THE SAME FILLET CLEARANCE WILL BE ACCEPTABLE. TOLERANCE OF 45° CHAMFER IS $\pm 2^\circ$.
- (b) THREADS SHALL CONFORM TO UNJF-3A IN ACCORDANCE WITH AS8879. EXTERNAL THREADS SHALL BE FULLY FORMED BY A SINGLE ROLLING PROCESS. THREAD LENGTH SHALL BE TOTAL LENGTH "C" ALLOWING A MAXIMUM OF TWO IMPERFECT THREADS.
- (c) KEYWAY SLOT, IF REQUIRED, SHALL BE IN ACCORDANCE WITH NASM14198 AND SHALL BE DESIGNATED BY ADDING SUFFIX "C" TO THE DASH NUMBER (-3 THROUGH -13 ONLY). THE KEYWAY SLOT SHALL BE ORIENTATED ALONG THE CENTERLINE OF THE SHANK AND PERPENDICULAR TO THE ROD END HOOP FACE.
- (d) 10° OF MINIMUM MISALIGNMENT IN ANY DIRECTION SHALL OCCUR WITHOUT INTERFERENCE BETWEEN BALL HOUSING AND SURFACES INDICATED BY DIMENSION "W."
- (e) CASE I - LOAD FIXED WITH RESPECT TO OUTER RACE (AVERAGE LIFE RATING).
CASE II - LOAD FIXED WITH RESPECT TO INNER RACE (AVERAGE LIFE RATING).
- (f) THESE RATINGS ARE FOR OPERATIONS UP TO 250 °F MAXIMUM. WHEN SUBJECTED TO OPERATION ABOVE 250 °F, THE RATINGS SHOULD BE REDUCED BY 20%.

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

CADMIUM IS CARCINOGENIC TO HUMANS (INTERNATIONAL AGENCY FOR RESEARCH ON CANCER (IARC), GROUP 1) AND IS HAZARDOUS TO ECOSYSTEMS AND HUMAN HEALTH. SUGGEST USE OF ALTERNATIVE MATERIALS, WHEN POSSIBLE.

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ANY OTHER DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS ARE THE ISSUES IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. RADIAL CLEARANCE: .0000 TO .0004 INCH UNDER 5.5 POUNDS FULLY REVERSING GAGE LOAD.
4. AXIAL CLEARANCE: .0000 TO .003 INCH UNDER 5.5 POUNDS FULLY REVERSING GAGE LOAD.

	AEROSPACE STANDARD	AS21151™ SHEET 2 OF 3	REV. G
	BEARING, BALL, ROD END, DOUBLE ROW, PRECISION, EXTERNAL THREAD, SELF-ALIGNING, AIRFRAME, TYPE II, -65 TO 300 °F		



Documents

Document Sharing Hub