

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS21230™

FEDERAL SUPPLY CLASS
3120


RATIONALE

THE TECHNICAL COMMITTEE, SAE ACBG PLAIN BEARING, HAS DETERMINED TO STABILIZE THIS DOCUMENT AS IT CONTAINS BASIC AND STABLE TECHNOLOGY.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE ACBG PLAIN BEARING COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS21230B/>



CUSTODIAN: ACBG		PROCUREMENT SPECIFICATION: MIL-B-8942	
	AEROSPACE STANDARD		AS21230™
	BEARING, PLAIN, SELF-ALIGNING, GROOVED OUTER RING PTFE LINED, WIDE		
			REV. B



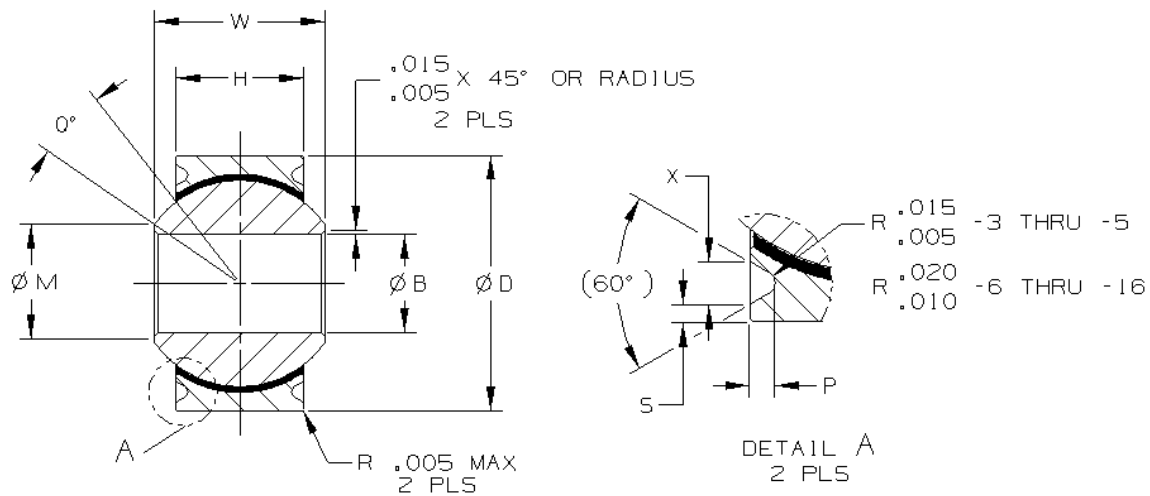


FIGURE 1 – PART CONFIGURATION

TABLE 1 – DIMENSIONS AND STRENGTHS

DASH NO	ØB	ØD	H	W	ØM	P	S	X	Q	STATIC LIMIT LOAD		OSCILLATING LOAD LBF	NO LOAD BREAKAWAY TORQUE IN-LBS	WT LB MAX
	+0.0000 -0.0005	+0.0000 -0.0005	±.005	+0.000 -0.002	MIN	+0.000 -0.015	+0.000 -0.010	+0.000 -0.010	MIN	RADIAL LBF	AXIAL LBF			
-3	.1900	.6250	.327	.437	.300	.030	.020	.045	15	9000	1770	3770	0.5-5.0	.031
-4	.2500	.6250	.327	.437	.300	.030	.020	.045	15	9000	1770	3770	1.0-5.0	.031
-5	.3125	.6875	.317	.437	.360	.030	.020	.045	14	9400	1640	4650	1.0-5.0	.035
-6	.3750	.8125	.406	.500	.466	.040	.030	.055	8	13 700	2630	6390	1.0-5.0	.060
-7	.4375	.9375	.442	.562	.537	.040	.030	.055	10	20 700	3650	9390	1.0-5.0	.080
-7A	.4375	.9062	.442	.562	.537	.040	.030	.055	10	20 700	3650	9390	1.0-5.0	.080
-8	.5000	1.0000	.505	.625	.607	.040	.030	.055	9	27 500	4970	12 150	1.0-5.0	.100
-9	.5625	1.1250	.536	.687	.721	.040	.030	.055	10	34 400	5370	14 900	1.0-5.0	.135
-10	.6250	1.1875	.567	.750	.747	.040	.030	.055	12	39 000	6130	16 700	1.0-5.0	.160
-12	.7500	1.3750	.630	.875	.845	.060	.030	.080	13	52 300	7730	22 100	1.0-5.0	.240
-14	.8750	1.6250	.755	.875	.995	.060	.030	.080	6	67 300	10 800	28 200	2.0-8.0	.350
-16	1.0000	2.1250	1.005	1.375	1.269	.060	.030	.080	12	137 000	19 300	53 700	2.0-8.0	.970



AEROSPACE STANDARD

BEARING, PLAIN, SELF-ALIGNING,
GROOVED OUTER RING
PTFE LINED, WIDE

AS21230™
SHEET 1 OF 2

REV.
B



Documents

Document Sharing Hub