

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
C

SAE AS21921

FEDERAL SUPPLY CLASS
4730

RATIONALE

STANDARD UPDATED TO CORRECT SAE TEMPLATE TO ADD A REVISION BLOCK; EXPANDED TOLERANCES OF DIMENSION H BY INCORPORATING THE REQUIREMENTS OF ARP1201, REVISED NOTES 9 AND 10 AND GENERAL SAE UPDATING.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS21921. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.


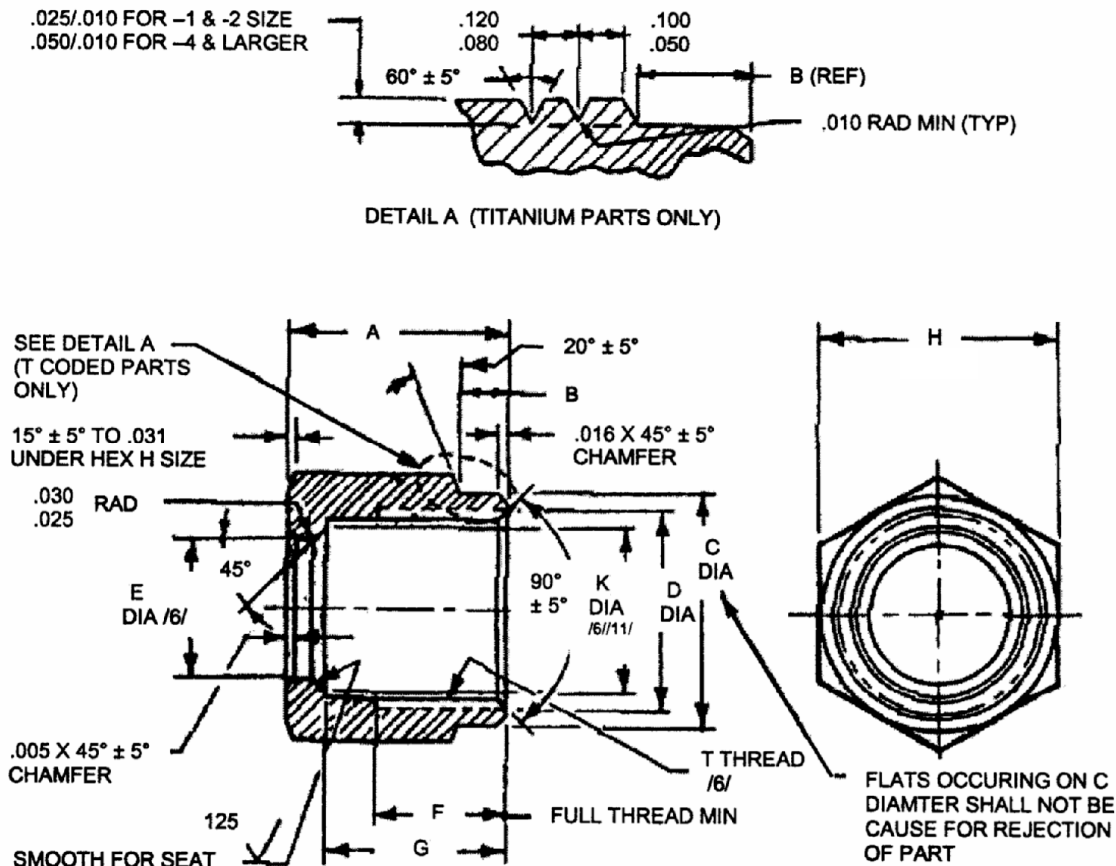


FIGURE 1 - NUT, SLEEVE COUPLING, FLARELESS

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS21921C>

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /14/ AS18280

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

NUT, SLEEVE COUPLING, FLARELESS

SAE AS21921
SHEET 1 OF 4

REV.
C

Documents

Copyright 2010 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1A - DIMENSIONS A-E

DASH NO /8/	NOMINAL TUBE SIZE	T THREAD /6/ AS8879	A ±.010	B ±.010	C +.005 -.000	D ±.016	E /6/ +.005 -.000
-2	.125	.3125-24 UNJF-3B	.53	.14	.365	.328	.171
-3	.188	.3750-24 UNJF-3B	.58	.10	.427	.391	.232
-4	.250	.4375-20 UNJF-3B	.72	.18	.552	.453	.300
-5	.313	.5000-20 UNJF-3B	.76	.18	.615	.516	.366
-6	.375	.5625-18 UNJF-3B	.80	.18	.677	.578	.425
-8	.500	.7500-16 UNJF-3B	.86	.18	.865	.766	.552
-10	.625	.8750-14 UNJF-3B	.98	.22	.990	.891	.690
-12	.750	1.0625-12 UNJ-3B	1.00	.24	1.240	1.078	.826
-16	1.000	1.3125-12 UNJ-3B	1.05	.26	1.490	1.328	1.074
-20	1.250	1.6250-12 UNJ-3B	1.05	.26	1.990	1.641	1.330
-24	1.500	1.8750-12 UNJ-3B	1.03	.22	2.236	1.891	1.580
-32	2.000	2.5000-12 UNJ-3B	1.12	.22	2.865	2.562	2.080

TABLE 1B - DIMENSIONS F-K

DASH NO /8/	F MIN	G ±.010	H	K ±.010 /6/ /11/	WEIGHT, LB/EA, APPROX, REF		
					STEEL	AL ALLOY	TI ALLOY
-2	.360	.425	.365 - .377	-	.008	.003	.004
-3	.366	.429	.428 - .440	-	.010	.004	.005
-4	.431	.547	.552 - .565	-	.028	.010	.016
-5	.444	.562	.615 - .630	-	.032	.012	.018
-6	.422	.578	.678 - .691	-	.037	.014	.021
-8	.516	.609	.865 - .878	-	.070	.025	.040
-10	.578	.687	.990 - 1.003	-	.083	.031	.047
-12	.562	.687	1.238 - 1.253	-	.148	.054	.085
-16	.562	.687	1.488 - 1.505	-	.220	.078	.126
-20	.562	.678	1.988 - 2.005	1.482	.470	.181	.271
-24	.562	.678	2.234 - 2.260	1.731	.530	.250	.305
-32	.562	.687	2.859 - 2.885	2.295	.860	.413	.495

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1. MATERIAL

SEE PROCUREMENT SPECIFICATION.

ALLOY STEEL

ALUMINUM ALLOY

CORROSION RESISTANT STEEL

TITANIUM ALLOY

2. FINISH: SEE PROCUREMENT SPECIFICATION.

3. BREAK EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.

4. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±0 DEGREES 30'.

	AEROSPACE STANDARD	SAE AS21921 SHEET 2 OF 4	REV. 6
	NUT, SLEEVE COUPLING, FLARELESS		



Documents

Document Sharing Hub