

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	RATIONALE		FEDERAL SUPPLY CLASS 5925
	REVISION IS REQUIRED TO IMPROVE DRAWING QUALITY, TO CORRECT THE DETAIL CALIBRATION REQUIREMENTS, TO REMOVE IMAGES AND REPLACE WITH WORD TEXT/TABLES, TO UPDATE SUPERSEDED COMPONENT REFERENCES, TO REMOVE GOVERNMENT JARGON, AND TO UPDATE DOCUMENT TO MOST CURRENT SAE GUIDELINES.		
AS24509™	NOTICE		
	THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS58091.		
		SAE values your input. To provide feedback on this Technical Report, please visit http://standards.sae.org/AS24509B	THIRD ANGLE PROJECTION
CUSTODIAN: AE-7P		PROCUREMENT SPECIFICATION: AS58091	
	AEROSPACE STANDARD (R) CIRCUIT BREAKER - AIRCRAFT, TRIP-FREE, TOGGLE, 5 THRU 15 AMP, TYPE I		AS24509™ SHEET 1 OF 5
		REV. B	Documents

ISSUED 1999-07 REVISED 2019-10

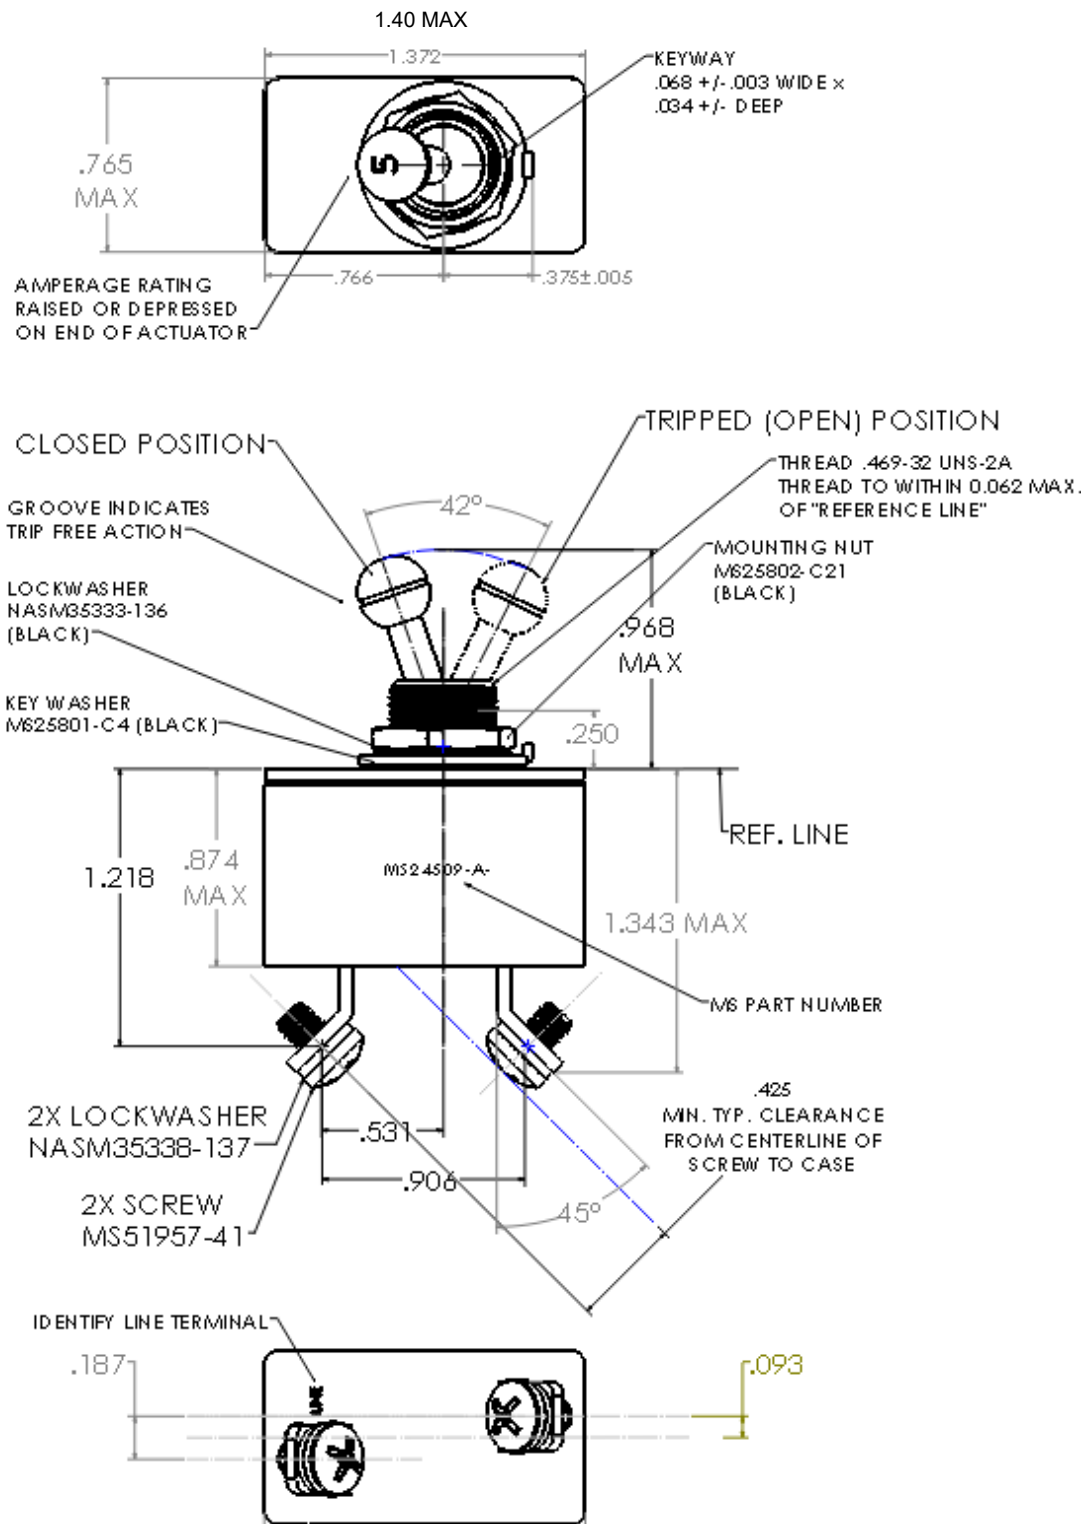


FIGURE 1 - CIRCUIT BREAKER (CONFIGURATION A-BUSHING MOUNT)



AEROSPACE STANDARD

(R) CIRCUIT BREAKER - AIRCRAFT, TRIP-FREE,
TOGGLE, 5 THRU 15 AMP, TYPE I

AS24509™
SHEET 2 OF 5

REV.



Documents

Document Sharing Hub