

REV.
C

AS25226™

FEDERAL SUPPLY CLASS
5940

RATIONALE

LIMITED SCOPE REVISION IS REQUIRED TO MAKE DOCUMENT CHANGES TO ELIMINATE CONDITIONS THAT HAVE RESULTED IN PRODUCT FIELD FAILURES: (1) CHANGE TABLE 1 "D" HOLE DIAMETER FOR -4A AND CHANGE THE "E" DIMENSION FOR -4A AND -10A, (2) ADD INFO TO THE STOCK DEPLETION STATEMENT, AND (3) ADD TABLE 3 (AS27212 APPLICATION DETAILS) TO THE APPLICATION NOTES.


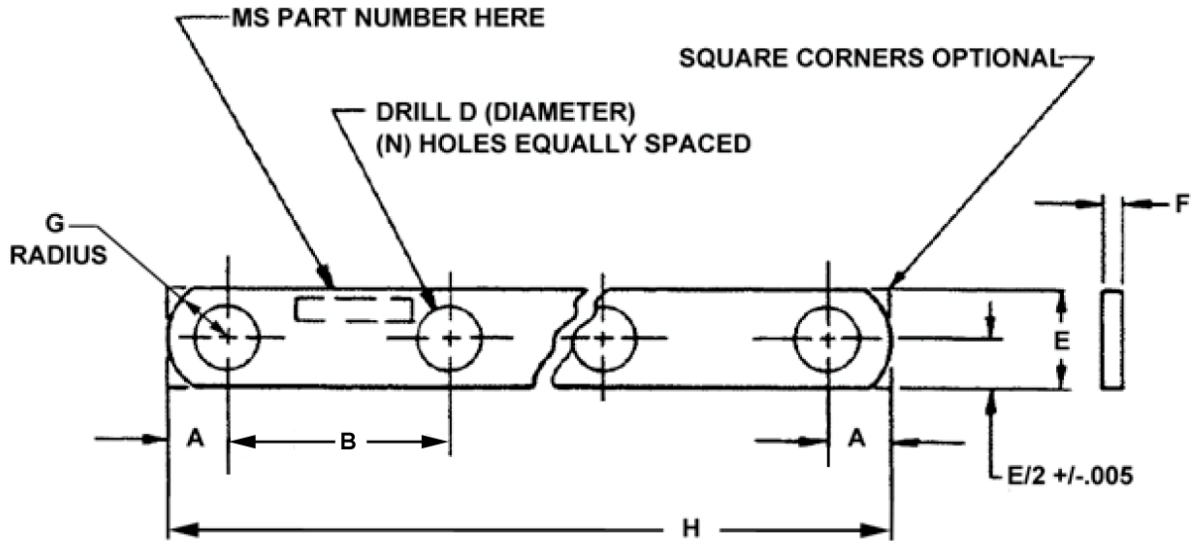


FIGURE 1 - TERMINAL LINK CONFIGURATION

For more information on this standard, visit
<https://www.sae.org/standards/content/AS25226C/>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8C2

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

LINK, TERMINAL, CONNECTING

AS25226™
SHEET 1 OF 4

REV.
C

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - FIGURE 1 DIMENSIONS

DASH NO. (SEE FOOTNOTE 1/)				STUD SIZE	A ±.010	B (SEE REQMT 1)	HOLE DIA D ±.005	E ±.010	F ±.003	G ±.03	H REF	MAX CAPACITY IN AMPS
CADMIUM PLATE	SILVER PLATE (SEE APPL NOTE 2)	NICKEL PLATE	TIN PLATE									
-2A- (N)	-2AS- (N)	-2AN- (N)	-2AT- (N)	NO. 6	.219	.594	.2012	.305	.032	.19	.594 (N-1) +.438	40
-4A- (N)	-4AS- (N)	-4AN- (N)	-4AT- (N)	NO. 10	.219	.750	.2130	.450	.051	.31	.750 (N-1) +.438	70
-6A- (N)	-6AS- (N)	-6AN- (N)	-6AT- (N)	1/4	.312	1.500	.313	.625	.051	.50	1.500 (N-1) +.624	90
-8A- (N)	-8AS- (N)	-8AN- (N)	-8AT- (N)	5/16	.312	1.500	.3754	.625	.051	.50	1.500 (N-1) +.624	90
-10A- (N)	-10AS- (N)	-10AN- (N)	-10AT- (N)	NO. 8	.219	.750	.2272	.388	.051	.31	.750 (N-1) +.438	50
-12A- (N)	-12AS- (N)	-12AN- (N)	-12AT- (N)	3/8	.312	1.500	.4379	.625	.051	.50	1.500 (N-1) +.624	90

1/ (N) INDICATES NUMBER OF HOLES IN BUS.

TABLE 2 - TABLE 1 METRIC CONVERSION

INCH	MM	INCH	MM	INCH	MM	INCHES	MM
.003	0.076	.174	4.420	.3130	7.950	.750	19.505
.005	0.127	.190	4.826	.350	8.890	1.500	38.100
.010	0.254	.2012	5.111	.375	9.525		
.030	0.762	.219	5.563	.386	9.804		
.032	0.813	.2272	5.771	.4379	11.123		
.051	1.295	.250	6.350	.500	12.700		
.138	3.505	.2581	6.556	.594	15.088		
.147	3.734	.310	7.874	.625	15.875		
.164	4.166	.312	7.925	.675	17.145		

REQUIREMENTS:

- DESIGN: THE TERMINAL LINK SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLE 1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.

FIGURE 1-TOLERANCE BETWEEN ANY 2 HOLES OF THE BUS (B DIMENSION) SHALL BE ±.010 INCH (NONCUMULATIVE).

BREAK ALL SHARP EDGES.

- MATERIAL: COPPER: BARS, RODS, AND SHAPES, IN ACCORDANCE WITH ASTM B187/B187M OR ASTM B272.
COPPER: SHEETS, STRIPS, PLATES, AND ROLLED BARS IN ACCORDANCE WITH ASTM B152/B152M.
- FINISH: CADMIUM PLATE, SILVER PLATE, NICKEL PLATE, OR TIN PLATE.
 - CADMIUM PLATE, IN ACCORDANCE WITH AMS-QQ-P-416, CLASS 3, TYPE II, FOR MAXIMUM TEMPERATURE OF 450 °F. NOT TO BE USED IN CONTACT WITH TITANIUM OR IN VACUUM APPLICATIONS, INCLUDING OUTER SPACE (SEE APPLICATION NOTE 1 AND SPECIFICATION NOTES).
 - SILVER PLATE, IN ACCORDANCE WITH ASTM B700, MINIMUM THICKNESS .0002 INCH. NOT TO BE USED IN CONTACT WITH TITANIUM.
 - NICKEL PLATE, IN ACCORDANCE WITH AMS-QQ-N-290, TYPE V, MINIMUM THICKNESS .0005 INCH FOR EXTERIOR APPLICATION AND TYPE VII, MINIMUM THICKNESS .0001 INCH FOR INTERNAL APPLICATION.
 - TIN PLATE, IN ACCORDANCE WITH ASTM B545 MATTE TIN ELECTRODEPOSITS FINISH, MINIMUM THICKNESS .0005 INCH FOR 330 °F MAXIMUM TEMPERATURE APPLICATIONS. THE PLATING SHALL NOT BE GREATER THAN 97% PURE TIN TO PREVENT DENDRITE (TIN WHISKER) FORMATION. LEAD OR OTHER SUITABLE MODIFIERS SHALL BE USED.

	AEROSPACE STANDARD		AS25226™ SHEET 2 OF 4	REV. C
	LINK, TERMINAL, CONNECTING			



Documents

Document Sharing Hub