

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS3272™

FEDERAL SUPPLY CLASS
5310


RATIONALE

THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3272B/>



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7251 /6/

AEROSPACE STANDARD

NUT – SELF-LOCKING, CLINCH,
SERRATED SHANK, 700 °F, DRY FILM COATED,
UNS S66286, UNJ THREAD

AS3272™

REV.
B

ISSUED 1992-10 REVISED 2014-01 REAFFIRMED 2018-11 STABILIZED 2024-01

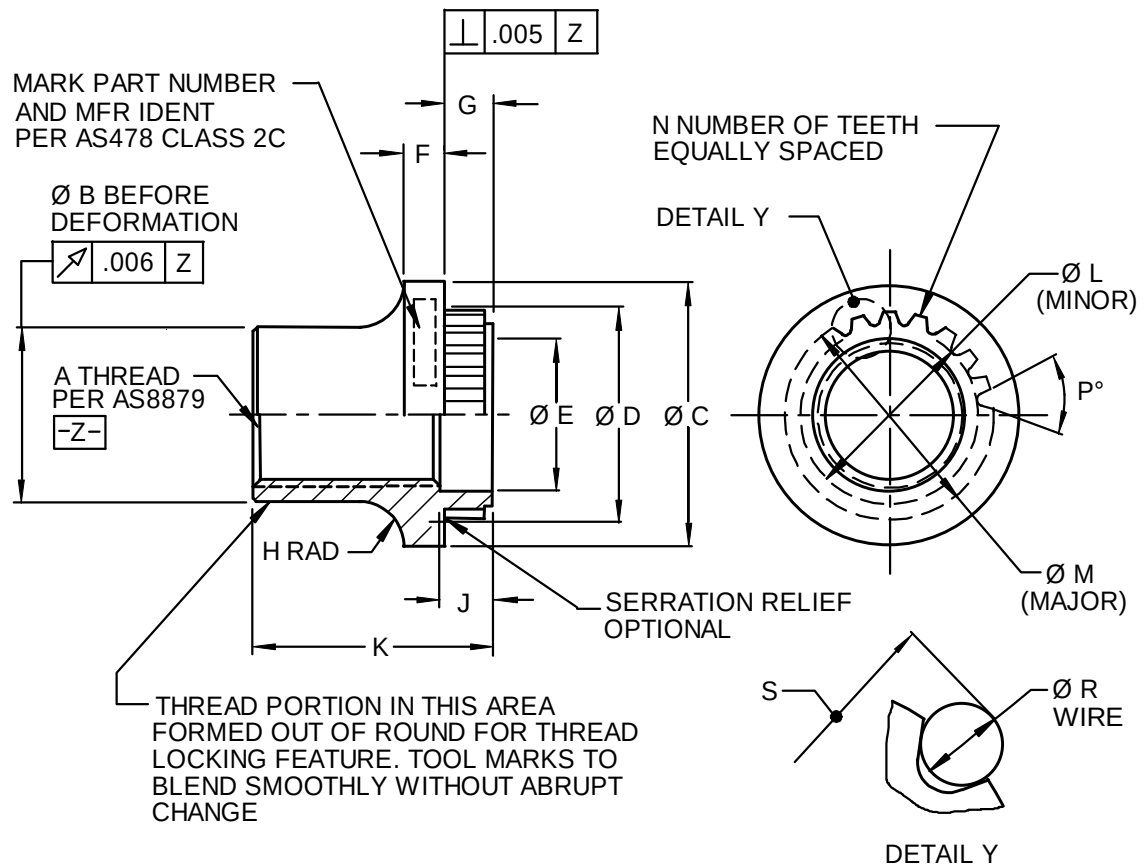


FIGURE 1

	AEROSPACE STANDARD	AS3272™ SHEET 1 OF 2	REV.
	NUT – SELF-LOCKING, CLINCH, SERRATED SHANK, 700 °F, DRY FILM COATED, UNS S66286, UNJ THREAD	Documents	B

