

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS3400™

FEDERAL SUPPLY CLASS
5306

RATIONALE

FIGURE REDRAWN TO AS1132 STANDARD, USAGE NOTE ADDED


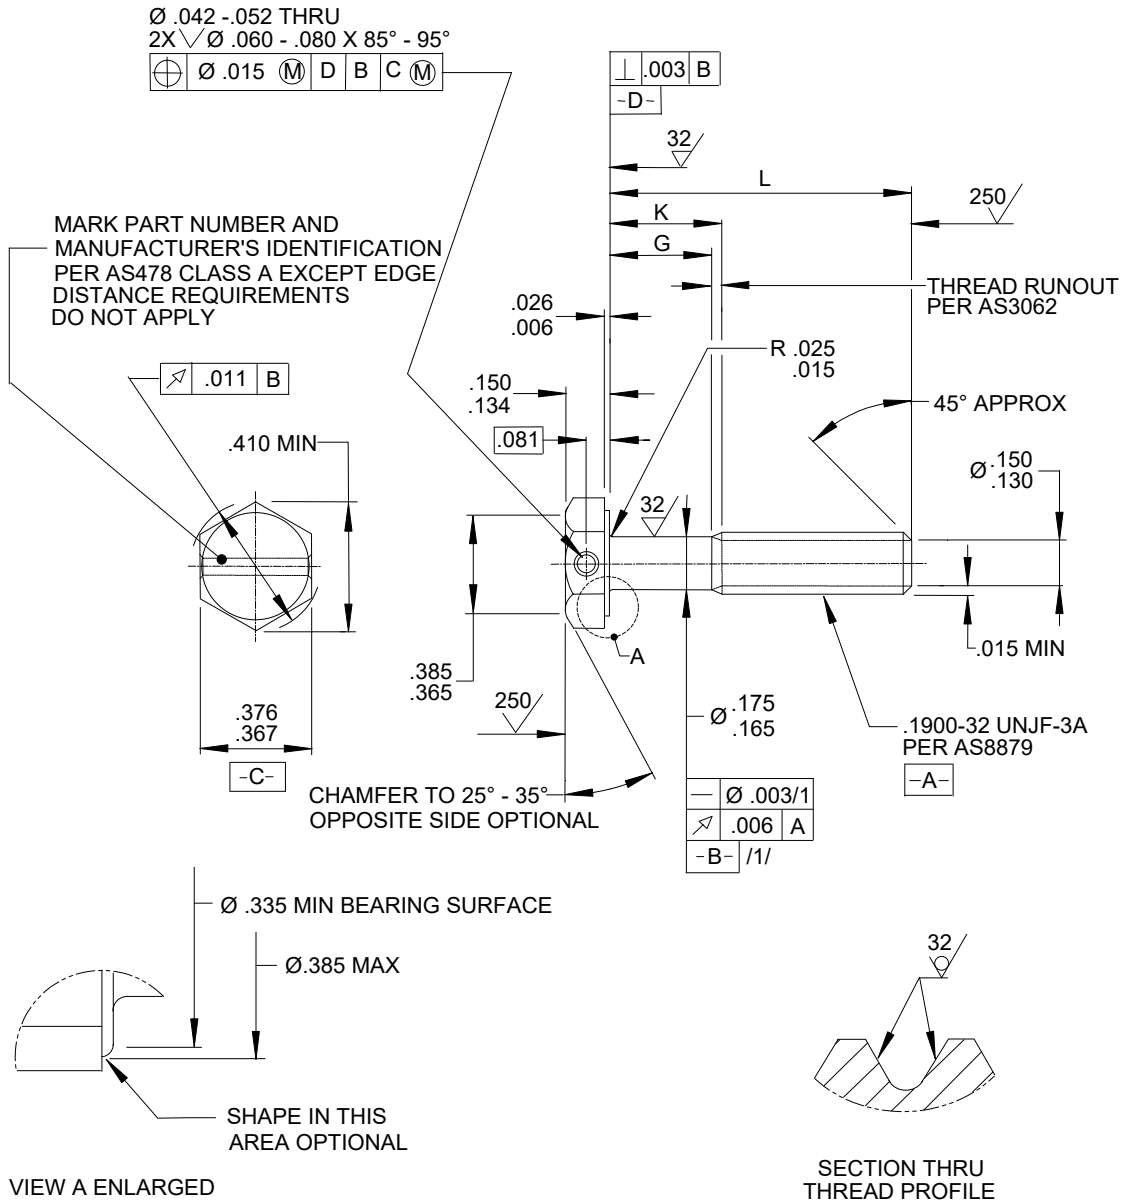


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3400B/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7471



AEROSPACE STANDARD

BOLT, MACHINE - HEXAGON HEAD, DRILLED
1 HOLE, PD SHANK, AMS5708 (UNS N07001),
.1900-32 UNJF-3A

AS3400™
SHEET 1 OF 2

REV.
B

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	G MIN	K MAX	APPROX MASS LB/100	PART NO.	L	G MIN	K MAX	APPROX MASS LB/100
AS3400-03	.302- .322	.025	.092	.66	AS3400-27	1.802-1.822	1.060	1.182	1.67
AS3400-04	.365- .385	.025	.092	.70	AS3400-28	1.865-1.885	1.123	1.245	1.71
AS3400-05	.428- .448	.025	.092	.74	AS3400-29	1.928-1.948	1.186	1.308	1.75
AS3400-06	.490- .510	.025	.092	.79	AS3400-30	1.990-2.010	1.248	1.370	1.79
AS3400-07	.552- .572	.025	.092	.83	AS3400-31	2.115-2.135	1.373	1.495	1.87
AS3400-08	.615- .635	.025	.092	.87	AS3400-32	2.240-2.260	1.498	1.620	1.96
AS3400-09	.678- .698	.025	.092	.91	AS3400-33	2.365-2.385	1.623	1.745	2.04
AS3400-10	.740- .760	.025	.120	.95	AS3400-34	2.490-2.510	1.748	1.870	2.13
AS3400-11	.802- .822	.060	.183	.99	AS3400-35	2.615-2.635	1.873	1.995	2.21
AS3400-12	.865- .885	.123	.245	1.03	AS3400-36	2.740-2.760	1.998	2.120	2.30
AS3400-13	.928- .948	.186	.308	1.08	AS3400-37	2.865-2.885	2.123	2.245	2.38
AS3400-14	.990-1.010	.248	.370	1.12	AS3400-38	2.990-3.010	2.248	2.370	2.46
AS3400-15	1.052-1.072	.310	.432	1.16	AS3400-39	3.115-3.135	2.373	2.495	2.55
AS3400-16	1.115-1.135	.373	.495	1.20	AS3400-40	3.240-3.260	2.498	2.620	2.63
AS3400-17	1.178-1.198	.436	.558	1.24	AS3400-41	3.365-3.385	2.623	2.745	2.72
AS3400-18	1.240-1.260	.498	.620	1.28	AS3400-42	3.490-3.510	2.748	2.870	2.80
AS3400-19	1.302-1.322	.560	.682	1.32	AS3400-43	3.615-3.635	2.873	2.995	2.89
AS3400-20	1.365-1.385	.623	.745	1.37	AS3400-44	3.740-3.760	2.998	3.120	2.97
AS3400-21	1.428-1.448	.686	.808	1.41	AS3400-45	3.865-3.885	3.123	3.245	3.05
AS3400-22	1.490-1.510	.748	.870	1.45					
AS3400-23	1.552-1.572	.810	.932	1.50					
AS3400-24	1.615-1.635	.873	.995	1.54					
AS3400-25	1.678-1.698	.936	1.058	1.59					
AS3400-26	1.740-1.760	.998	1.120	1.62					

NOTES:

- 1/ FOR PART NUMBERS AS3400-03 THRU AS3400-14, THE DATUM **A** SHALL REPLACE DATUM **B**.
2. MATERIAL: AMS5708 CORROSION AND HEAT RESISTANT NICKEL ALLOY (COMPOSITION SIMILAR TO UNS N07001).
3. PROCUREMENT SPECIFICATION: AS7471.
4. FLUORESCENT PENETRANT INSPECTION PER ASTM E1417/E1417M, TYPE 1, SENSITIVITY LEVEL 2 MIN.
5. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra, EXCEPT UPSET HEAD TO BE 250 MICROINCHES Ra.
6. BREAK SHARP EDGES .003 TO .015, UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGULAR DIMENSIONS $\pm 5^\circ$.
8. DIMENSIONS AND TOLERANCING ANSI Y14.5M-1982 (ASME PUBLICATION).
9. DO NOT USE UNASSIGNED PART NUMBERS.
10. UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED
11. REVISION INDICATOR: A CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT, INCLUDING TECHNICAL REVISIONS. CHANGE BARS AND (R) ARE NOT USED IN ORIGINAL PUBLICATIONS, NOR IN DOCUMENTS THAT CONTAIN EDITORIAL CHANGES ONLY.

AS AND AMS ARE SAE INTERNATIONAL PUBLICATIONS.
ASME IS AN AMERICAN SOCIETY OF MECHANICAL ENGINEERS PUBLICATION.
ASTM IS AN ASTM INTERNATIONAL PUBLICATION.

	AEROSPACE STANDARD		AS3400™ SHEET 2 OF 2	REV. B
	BOLT, MACHINE - HEXAGON HEAD, DRILLED 1 HOLE, PD SHANK, AMS5708 (UNS N07001), .1900-32 UNJF-3A			

 Documents



Documents

Document Sharing Hub