

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS3417™

FEDERAL SUPPLY CLASS
5306

RATIONALE

UPDATE TO ASME Y14.5-2018. UPDATE LEAD THREAD CHAMFER TO AS1132. REVISE POSITION FCF ON MAJ DIA TO INCLUDE NEW DATUM C PER AS1132. REVISE LIGHTENING HOLE CONFIGURATION TO AS1132. REVISE HEAD-TO-SHANK FILLET TO CR. NOTE 2 - ADD "COMPOSITION SIMILAR TO." GENERAL EDITORIAL UPDATES.


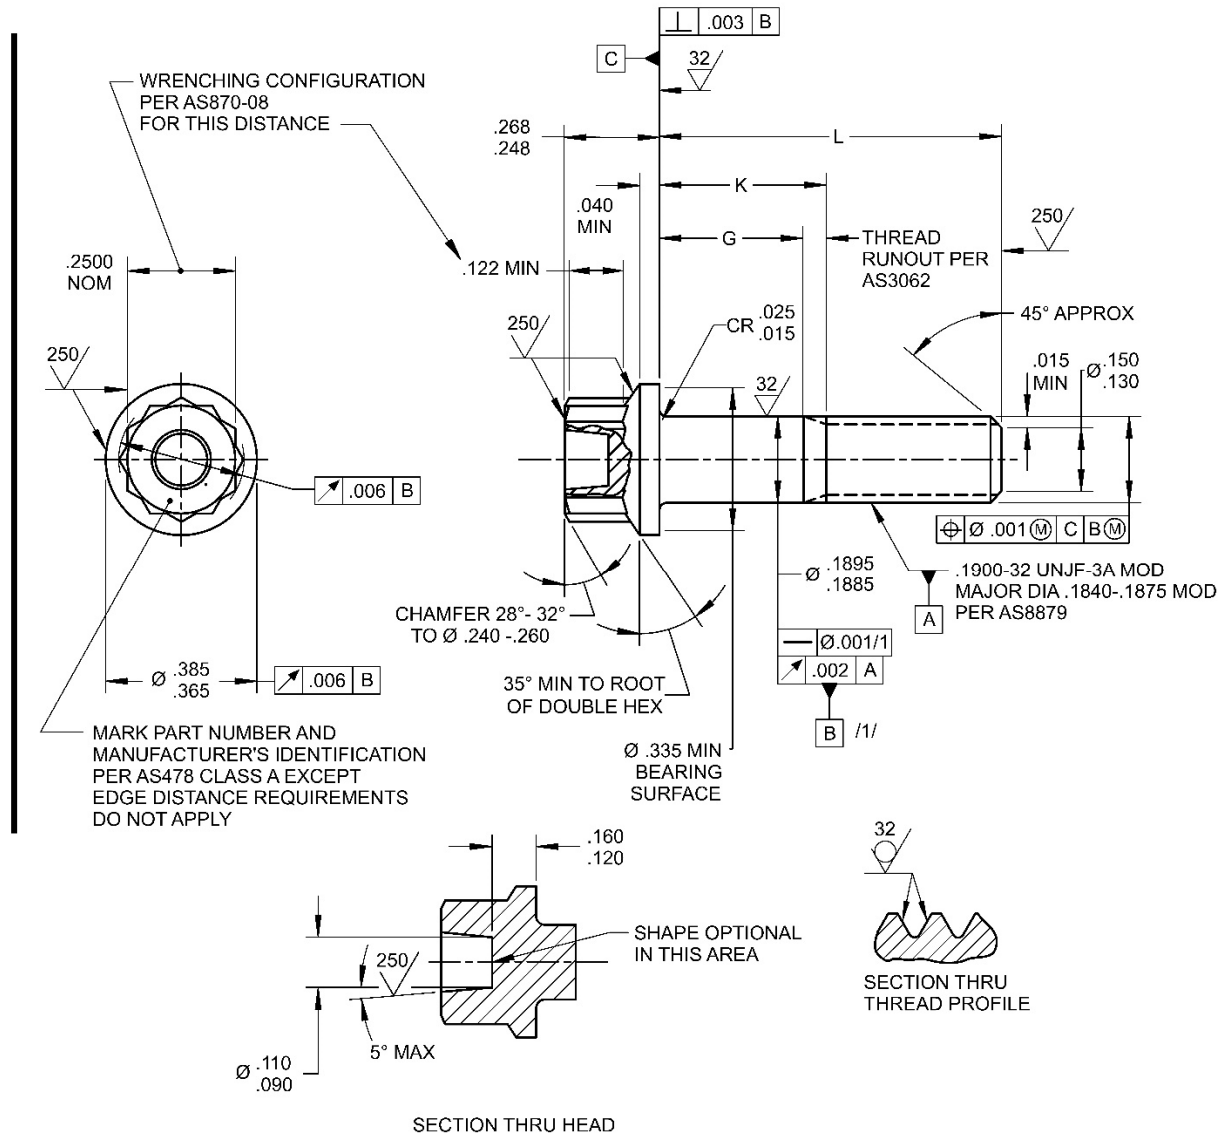


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3417C/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7467 /3/



AEROSPACE STANDARD

BOLT, MACHINE, DOUBLE HEX,
EXTENDED WASHER HEAD, CLOSE TOL. SHANK,
UNS N07718, 185 KSI MIN, .1900-32 UNJF-3A
(STRESS RUPTURE RESISTANT)

AS3417™
SHEET 1 OF 3

REV.
C

Documents

Copyright © 2022 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - PART NUMBERS AND DIMENSIONS L, G, K, AND APPROX MASS

PART NUMBER	L ±.010	G MIN	K MAX	APPROX MASS LB/100
AS3417-03	.607	.126	.198	.92
AS3417-04	.669	.188	.260	.97
AS3417-05	.731	.250	.322	1.02
AS3417-06	.794	.312	.385	1.08
AS3417-07	.857	.376	.448	1.13
AS3417-08	.919	.438	.510	1.18
AS3417-09	.981	.500	.572	1.23
AS3417-10	1.044	.562	.635	1.28
AS3417-11	1.107	.626	.698	1.33
AS3417-12	1.169	.688	.760	1.38
AS3417-13	1.231	.750	.822	1.44
AS3417-14	1.294	.812	.885	1.49
AS3417-15	1.357	.876	.948	1.54
AS3417-16	1.419	.938	1.010	1.59
AS3417-17	1.481	1.000	1.072	1.64
AS3417-18	1.544	1.062	1.135	1.70
AS3417-19	1.607	1.126	1.198	1.75
AS3417-20	1.669	1.188	1.260	1.80
AS3417-21	1.731	1.250	1.322	1.85
AS3417-22	1.794	1.312	1.385	1.91
AS3417-23	1.857	1.376	1.448	1.96
AS3417-24	1.919	1.438	1.510	2.01
AS3417-25	1.981	1.500	1.572	2.06
AS3417-26	2.044	1.562	1.635	2.11
AS3417-27	2.107	1.626	1.698	2.16
AS3417-28	2.169	1.688	1.760	2.21
AS3417-29	2.231	1.750	1.822	2.26
AS3417-30	2.294	1.812	1.885	2.32
AS3417-31	2.357	1.876	1.948	2.37
AS3417-32	2.419	1.938	2.010	2.42
AS3417-33	2.481	2.000	2.072	2.47
AS3417-34	2.544	2.062	2.135	2.53
AS3417-35	2.607	2.126	2.198	2.58
AS3417-36	2.669	2.188	2.260	2.63
AS3417-37	2.731	2.250	2.322	2.68
AS3417-38	2.794	2.312	2.385	2.74
AS3417-39	2.857	2.376	2.448	2.78
AS3417-40	2.919	2.438	2.510	2.84
AS3417-41	2.981	2.500	2.572	2.89
AS3417-42	3.044	2.562	2.635	2.94
AS3417-43	3.107	2.626	2.698	2.99
AS3417-44	3.169	2.688	2.760	3.04
AS3417-45	3.231	2.750	2.822	3.09
AS3417-46	3.294	2.812	2.885	3.15
AS3417-47	3.357	2.876	2.948	3.20
AS3417-48	3.419	2.938	3.010	3.25
AS3417-49	3.481	3.000	3.072	3.30
AS3417-50	3.544	3.062	3.135	3.36
AS3417-51	3.607	3.126	3.198	3.41
AS3417-52	3.669	3.188	3.260	3.46
AS3417-53	3.731	3.250	3.322	3.51
AS3417-54	3.794	3.312	3.385	3.56
AS3417-55	3.857	3.376	3.448	3.61

	AEROSPACE STANDARD	AS3417™ SHEET 2 OF 3	REV. C
	BOLT, MACHINE, DOUBLE HEX, EXTENDED WASHER HEAD, CLOSE TOL. SHANK, UNS N07718, 185 KSI MIN, .1900-32 UNJF-3A (STRESS RUPTURE RESISTANT)		



Documents

Document Sharing Hub