


SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C			FEDERAL SUPPLY CLASS 5340 5342
AS3511™	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
		For more information on this standard, visit https://www.sae.org/standards/content/AS3511C/	THIRD ANGLE PROJECTION 
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: AS4536	
	AEROSPACE STANDARD CABLE, SAFETY, KIT, CORROSION RESISTANT STEEL, UNS S30400		AS3511™ Documents
Copyright © 2024 SAE International All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.		REV. C	

ISSUED 1993-01 REVISED 2008-09 REAFFIRMED 2018-08 STABILIZED 2024-03

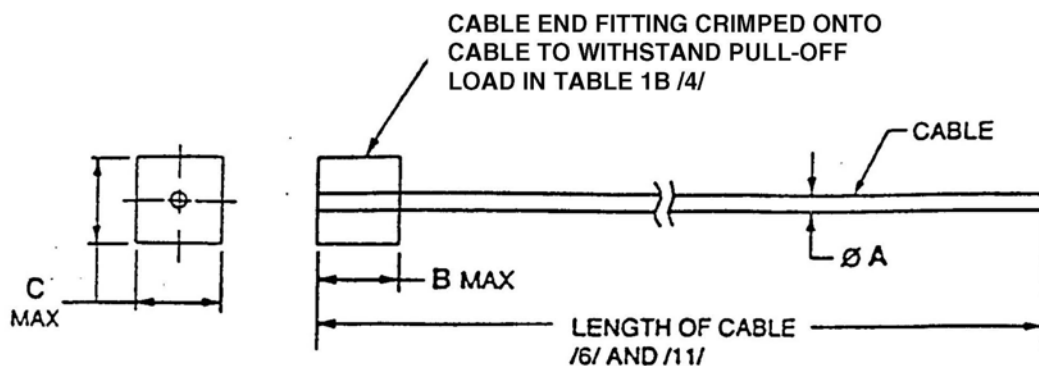


FIGURE 1 - SAFETY CABLE-END FITTING AND CABLE

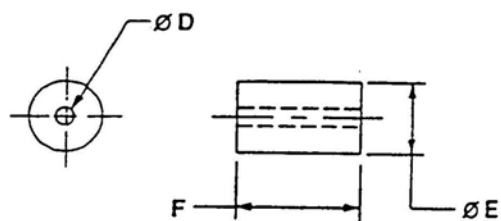


FIGURE 2 - FERRULE

TABLE 1A - DIMENSIONS A-D

PART NUMBER	Ø A /5/ INCH (mm)	B MAX INCH (mm)	C MAX INCH (mm)	Ø D INCH (mm)
AS3511-01XXX	.022-.026 (0.56-0.66)	.135 (3.43)	.085 (2.16)	.029-.032 (0.74-0.81)
AS3511-02XXX	.032-.038 (0.81-0.97)	.135 (3.43)	.125 (3.18)	.043-.049 (1.09-1.24)
AS3511-03XXX	.040-.046 (1.02-1.17)	.135 (3.43)	.125 (3.18)	.051-.057 (1.30-1.45)

TABLE 1B - DIMENSIONS E-F

PART NUMBER	Ø E INCH (mm)	F INCH (mm)	CABLE TYPE	MINIMUM PULL-OFF LOAD POUND (NEWTON) SEE NOTE /10/
AS3511-01XXX	.089-.091 (2.26-2.31)	.087-.095 (2.21-2.41)	STRAND 1X7	30 (133.4)
AS3511-02XXX	.104-.106 (2.64-2.69)	.156-.164 (3.96-4.17)	CABLE 3X7	70 (311.4)
AS3511-03XXX	.104-.106 (2.64-2.69)	.156-.164 (3.96-4.17)	CABLE 7X7	110 (489.3)



AEROSPACE STANDARD

CABLE, SAFETY, KIT,
CORROSION RESISTANT STEEL,
UNS S30400

AS3511™
SHEET 1 OF 3

REV.



Documents

Document Sharing Hub