

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A
AS3616™

FEDERAL SUPPLY CLASS
5310

RATIONALE


THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS3616A/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

NUT, SELF-LOCKING, DOUBLE HEXAGON
REDUCED FLANGE, SOLID FILM LUBE
COUNTERBORED 180 KSI, 1400 °F, UNS N07001

AS3616™

REV.
A



Documents

Copyright © 2024 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2007-10 REAFFIRMED 2018-08 STABILIZED 2024-02

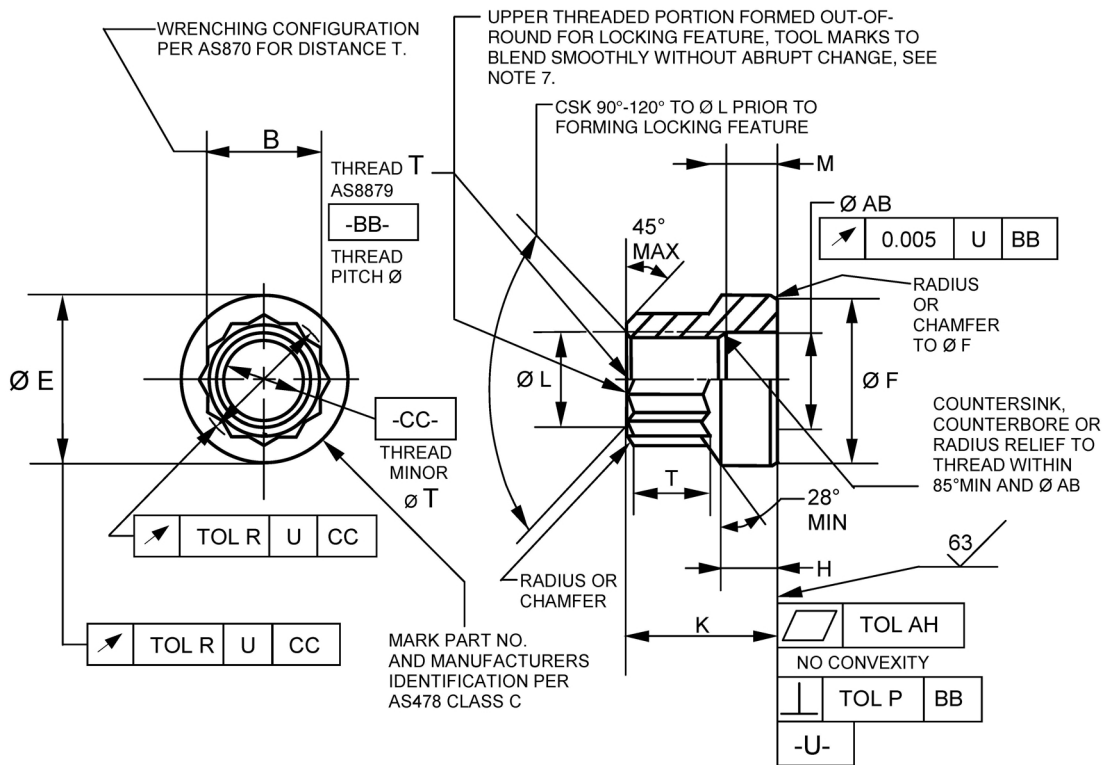


FIGURE 1

TABLE 1

PART /11/ NUMBER	T THREAD SIZE PER AS8879	B		ØE MAX	ØF MIN	H MIN	K MAX
		AS870 DASH NO.	NOMINAL SIZE				
AS3616-03	.1900-32 UNJF-3B	08	.2500	.340	.325	.125	.350
AS3616-04	.2500-28 UNJF-3B	10	.3125	.450	.410	.170	.437
AS3616-05	.3125-24 UNJF-3B	12	.3750	.525	.495	.175	.490
AS3616-06	.3750-24 UNJF-3B	14	.4375	.600	.560	.195	.588
AS3616-07	.4375-20 UNJF-3B	18	.5625	.690	.650	.220	.590
AS3616-08	.5000-20 UNJF-3B	20	.6250	.780	.740	.240	.785
AS3616-09	.5625-18 UNJF-3B	22	.6875	.880	.840	.270	.855
AS3616-10	.6250-18 UNJF-3B	25	.7812	.970	.925	.290	.965
AS6316-12	.7500-16 UNJF-3B	30	.9375	1.230	1.180	.320	1.110



AEROSPACE STANDARD
 NUT, SELF-LOCKING, DOUBLE HEXAGON
 REDUCED FLANGE, SOLID FILM LUBE
 COUNTERBORED 180 KSI, 1400 °F, UNS N07001

AS3616™
 SHEET 1 OF 3

REV.
 A



Documents

Document Sharing Hub