

REV.
A

AS38386™/4

FEDERAL SUPPLY CLASS
4730

RATIONALE

REVISE CONFIGURATION OF SLOT IN FIGURE 3 SO THAT THE TOP CUTOUT IS HORIZONTAL WITH THE BOTTOM EDGE OF HOOK.

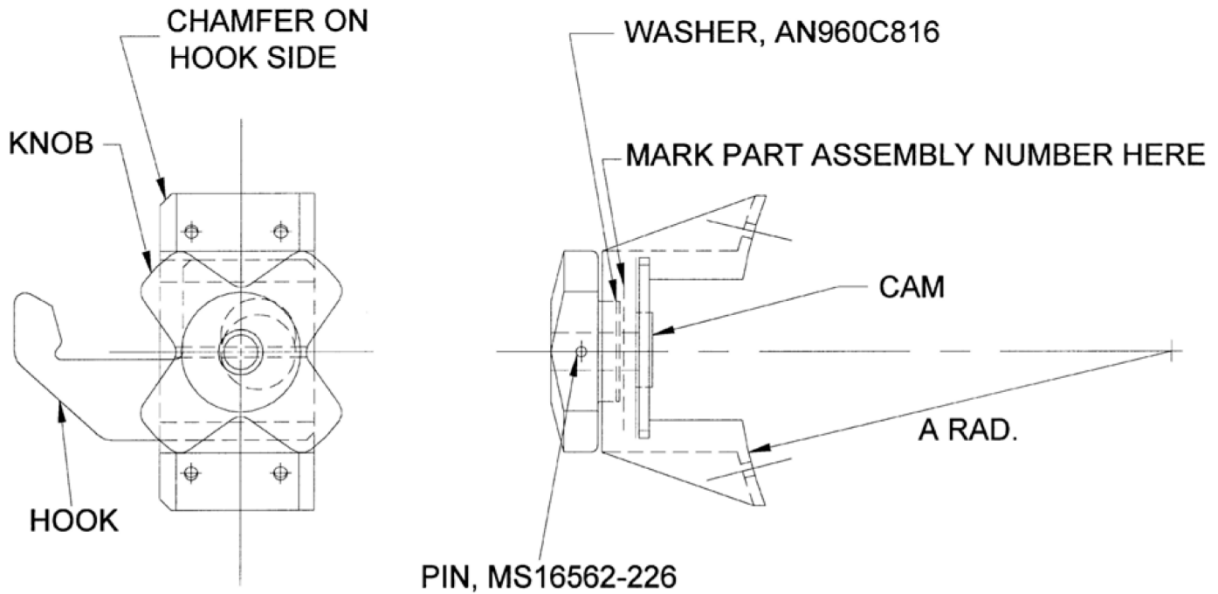


FIGURE 1 - CATCH ASSEMBLY

TABLE 1 - RADIUS DIMENSIONS


DUCT SIZE	A RADIUS
8	3.965
12	5.965
16	7.965

GENERAL NOTES:

1. REMOVE ALL BURRS AND BREAK SHARP EDGES.
2. DIMENSIONING AND TOLERANCING: ASME Y14.5M-1994.
3. DIMENSIONS ARE IN INCHES AND DEGREES. TOLERANCES: ± 0.015 , $\pm 1^\circ$, UNLESS OTHERWISE SPECIFIED.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS38386/4A>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS38386



AEROSPACE STANDARD

CATCH ASSEMBLY, AIR DUCT HOSE,
GROUND COOLING

AS38386™/4
SHEET 1 OF 5

REV.
A

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

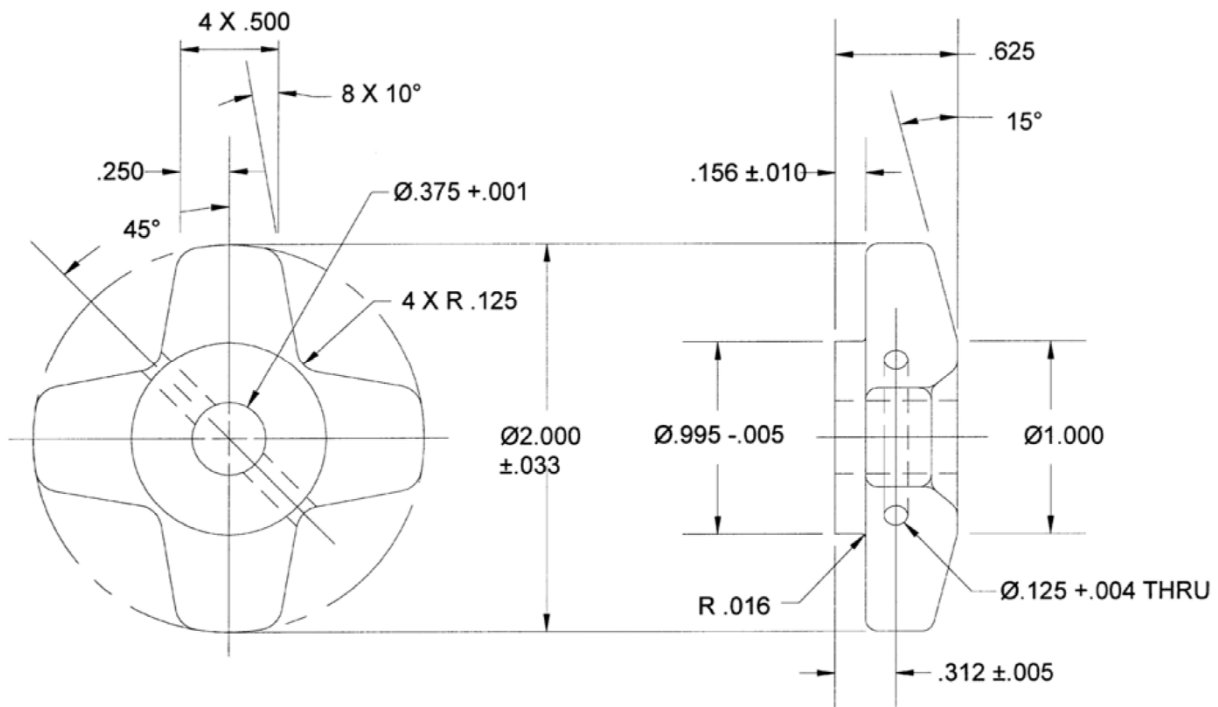


FIGURE 2 - KNOB

NOTES:

1. MATERIAL: ALUMINUM ALLOY 295 OR 355, CONDITION T6, AS SPECIFIED IN ASTM B26.
2. FINISH: ANODIZE, TYPE I, CLASS 1, AS SPECIFIED IN MIL-A-8625.
3. ALL CORNER RADII: R.063.
4. SURFACE TEXTURE: MACHINE EDGES TO 250 MICROINCHES Ra AS SPECIFIED IN ASME B46, UNLESS OTHERWISE STATED.
5. TOLERANCES: ROUGH CASTINGS: $\pm .031$.

	AEROSPACE STANDARD		AS38386™/4 SHEET 2 OF 5	REV. A
	CATCH ASSEMBLY, AIR DUCT HOSE, GROUND COOLING			



Documents

Document Sharing Hub