

SSUED 2000-07	REVISED 2010-11	REAFFIRMED 2020-09
---------------	-----------------	--------------------

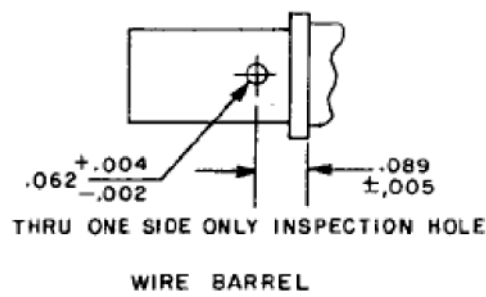


FIGURE 2 – WIRE BARREL (BORE BARREL CRIMP DEPTH)

TABLE 1A – DIMENSIONS

BIN CODE	A DIA		B DIA MIN	C DIA		D DIA MIN	E DIA +.002 -.001	F DIA	
329	.312 (7.92)	+.002 (.051) - .001 (.025)	.287 (7.29)	.234 (5.96)	±.002 (.051)	.180 (4.57)	.312 (7.92)	.286 (7.26)	±.002 (.051)
330									
331	.334 (8.48)		.306 (7.77)	.281 (7.14)	.227 (5.77)	.334 (8.48)	.308 (7.82)		
332									
333	.516 (13.11)		.472 (11.99)	.406 (10.31)	+.004 (.101) - .003 (.076)	.359 (9.12)	.516 (13.11)	.490 (12.45)	+.002 (.051) - .005 (.127)
334	.586 (14.88)	±.002 (.051)	.541 (13.74)	.500 (12.70)		.408 (10.36)	.654 (16.61)	.629 (15.98)	
335	.680 (17.27)		.635 (16.13)	.641 (16.28)		.502 (12.75)	.748 (19.00)	.723 (18.36)	

TABLE 1B – DIMENSIONS (CONTINUED)

BIN CODE	G DIA		H DIA		J ±.005 (.127)	K REF	L ±.002
329	.342 (8.69)	±.002 (.051)	.312 (7.92)	±.002 (.051)	1.158 (29.41)	2.206 (56.03)	.251 (6.38)
330					1.752 (44.50)	2.862 (72.69)	.313 (7.95)
331	.417 (10.59)		.374 (9.50)		1.158 (29.41)	2.206 (56.03)	.251 (6.38)
332					1.752 (44.50)	2.862 (72.69)	.313 (7.95)
333	±.003 (.076)	.506 (12.85)	+.004 (.101) - .003 (.076)	1.283 (32.59)	2.393 (60.78)		
334		.609 (15.47)					
335		.750 (19.05)					

	AEROSPACE STANDARD	AS39029™/49 SHEET 2 OF 5 	REV. A
	(R) CONTACTS, ELECTRICAL CONNECTOR, SOCKET, CRIMP REMOVABLE (FOR MIL-DTL-22992 CLASS L CONNECTORS)		