



AEROSPACE STANDARD

AS4052™**REV. B**

Issued 1994-04
Revised 2008-11
Reaffirmed 2021-02

Superseding AS4052A

(R) Gland Design: Scraper, Landing Gear, Installation

RATIONALE

AS4052B has been reaffirmed to comply with the SAE five-year review policy.

1. SCOPE

This SAE Aerospace Standard (AS) covers an alternate gland design for the installation of scraper/ wiper rings in the lower end of landing gear shock struts for the purpose of contaminant exclusion.

The defined scraper gland covered by this document, as shown in Table 1, is a variant of AS4716, the accepted gland standard for MS28775, O-ring packing seals. Piston rod diameters, gland internal diameters, groove sidewall angles and the surface finish are all defined by AS4716, but the gland outer retaining wall diameter is changed. The traditional scraper design installed into the glands detailed in Table 1 typically utilize components made from urethane or nitrile materials. These scraper designs, while still acceptable, must be reviewed in consideration to deicing, cleaners and disinfectant fluids applied to or in contact with the landing gear, as the materials of construction for the installed scrapers may not be compatible to these fluids. Exposure of the scraper to incompatible fluids is likely to reduce the performance of the scraper.

In addition, an alternative scraper gland is also covered by this document and shown in Table 2. It is also a variant of AS4716, however this gland has a reduced atmospheric gland lip and profiled lead in geometry to allow for a PTFE jacket metal spring energized scraper to be installed. The advantages of the PTFE jacket metal spring energized scraper design is that the materials of construction are chemically inert, greatly reducing the possibility of negative performance due to incompatibility with deicers, cleaners and disinfectant fluids.

AS4088 is similar to the hardware design in Table 1 of this document, which was developed by SAE A-6 for flight control and general-purpose cylinders. It differs from this document primarily by the clearance between the rod (piston) and outer gland wall.

1.1 Purpose

This document is intended to present a groove which will accommodate an improved scraper/wiper ring assembly design and is not intended to obsolete the MS33675 gland standard.

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

Full document details: SAE AS4052B

For more information on this standard, visit
<https://www.sae.org/standards/content/AS4052B>

Documents

Document Sharing Hub

1.1.1 Design Practice

Historically, the most common scraper gland has been an MS33675, which accepted either a MS28776 bronze scraper or a comparable TFE scraper. It has been noted that this arrangement is deficient in two aspects: the metal scraper ring is split, allowing contaminants to pass through and around it; and, being installed in a very abbreviated gland, the scraper frequently dislodges under conditions of shock strut deflection. An improved metal, plastic, or elastomeric endless scraper ring would require additional gland volume with greater retaining surfaces than specified by MS33675 and as detailed in this specification.

The recommended gland geometry for AS4052 is separated into Type 1 and Type 2 as shown below.

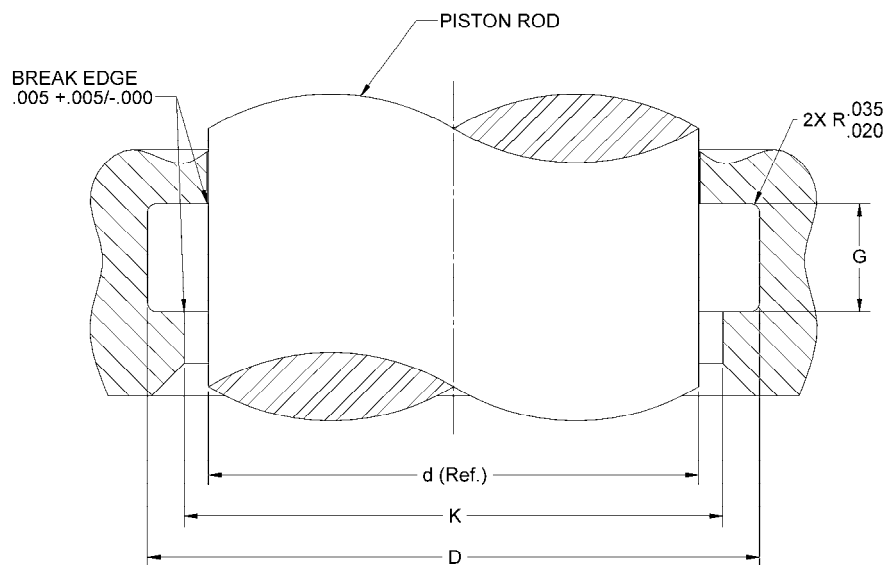


FIGURE 1 - TO ACCOMPANY TYPE 1 IN TABLE 1

TABLE 1 - TYPE 1 GLAND DIMENSIONAL INFORMATION
ALL DIMENSIONS IN INCHES

Gland Size Code Dash No.	Ød Piston Rod O.D. Ref.	ØD Gland I.D.	ØK Retaining Lip I.D.	G Gland +0.010 Length -0.000
	+0.000 -0.002	+0.00 2 -0.000	+0.000 -0.010	0.334
325	1.498	1.870	1.646	
326	1.623	1.995	1.771	
327	1.748	2.120	1.896	
328	1.873	2.245	2.021	
329	1.998	2.370	2.146	
330	2.123	2.495	2.271	
331	2.248	2.620	2.396	
332	2.373	2.745	2.521	
333	2.498	2.870	2.646	
334	2.623	2.995	2.771	
335	2.748	3.120	2.896	
336	2.873	3.245	3.021	
337	2.997	3.369	3.145	
338	3.122	3.494	3.270	
339	3.247	3.619	3.395	
340	3.372	3.744	3.520	
341	3.497	3.869	3.645	
342	3.622	3.994	3.770	
343	3.747	4.119	3.895	
344	3.872	4.244	4.020	
345	3.997	4.369	4.145	
346	4.122	4.494	4.270	
347	4.247	4.619	4.395	
348	4.372	4.744	4.520	
349	4.497	4.869	4.645	