

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS4326™

FEDERAL SUPPLY CLASS
4730

RATIONALE

GRAPHICS REDRAWN. OPTION FOR SAFETY WIRE HOLES ADDED. GENERAL REVISION TO INCORPORATE LATEST SAE STANDARDIZATION.


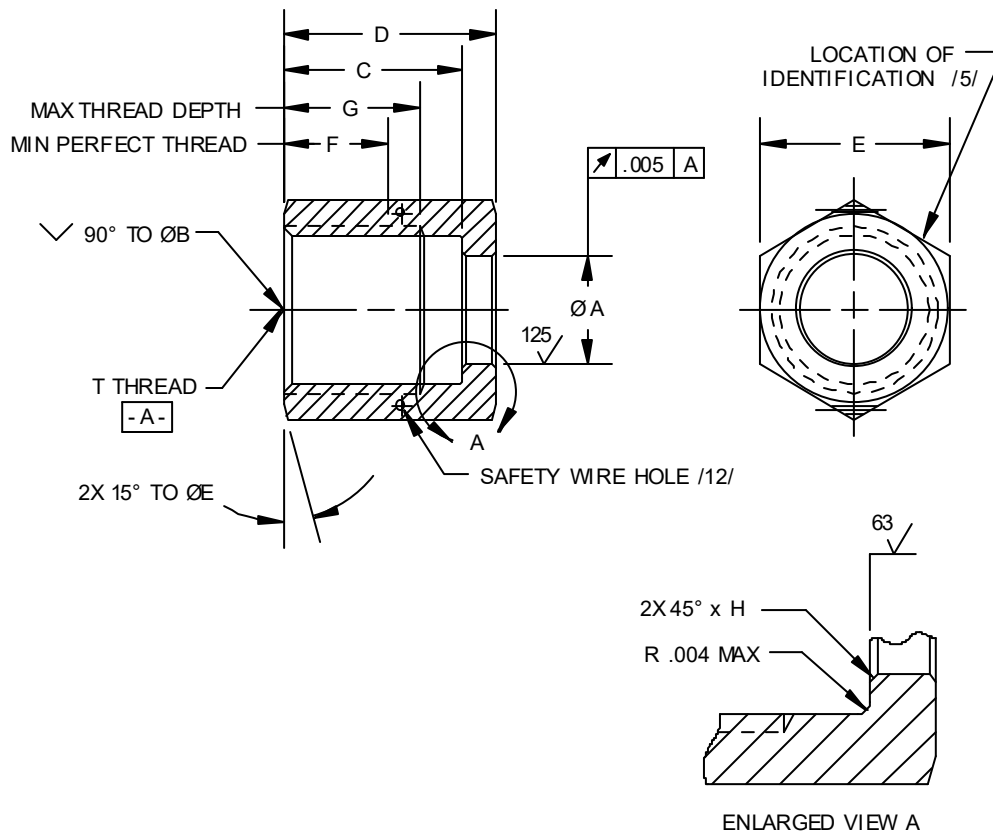


FIGURE 1 - NUT, COUPLING

SAE values your input. To provide feedback on this Technical Report, please visit <http://standards.sae.org/AS4326A>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ KSC-F-124



AEROSPACE STANDARD

(R) NUT, COUPLING

AS4326™
SHEET 1 OF 4

REV.
A



Copyright © 2019 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - DIMENSIONS

BASIC NUMBER AS4326 /11/ SIZE CODE	TUBE OD	T THREAD PER MIL-S-8879	A		B ±.005	C ±.005	D ±.005	E	F
			+.003 -.000						
02	.125	.3125-24UNJF-3B	.180	.313	.460	.542	.371-	.378	.251
03	.188	.3750-24UNJF-3B	.242	.375	.506	.604	.434-	.441	.282
04	.250	.4375-20UNJF-3B	.305	.438	.532	.620	.559-	.566	.300
05	.312	.5000-20UNJF-3B	.374	.500	.579	.683	.621-	.628	.331
06	.375	.5625-18UNJF-3B	.440	.563	.603	.729	.684-	.691	.333
08	.500	.7500-16UNJF-3B	.570	.750	.723	.854	.871-	.878	.375
10	.625	.8750-14UNJF-3B	.698	.875	.817	.979	.996-	1.003	.461
12	.750	1.0625-12UNJ-3B	.834	1.063	.868	1.026	1.246-	1.253	.469
16	1.000	1.3125-12UNJ-3B	1.089	1.313	.962	1.136	1.496-	1.503	.563
20	1.250	1.6250-12UNJ-3B	1.347	1.625	1.017	1.229	1.984-	2.016	.563
24	1.500	1.8750-12UNJ-3B	1.617	1.875	1.170	1.417	2.230-	2.270	.661
28	1.750	2.2500-12UNJ-3B	1.890	2.250	1.316	1.563	2.605-	2.645	.730
32	2.000	2.5000-12UNJ-3B	2.167	2.500	1.462	1.734	2.855-	2.895	.844

TABLE 2 - DIMENSIONS AND WEIGHTS

BASIC NUMBER					
AS4326		H	LB/EA	LB/EA	
/11/		+.005	MAX	MAX	
SIZE CODE	G	-.000	ALUM	CRES	
02	.376	.005	.00377	.0105	
03	.407	.005	.00522	.0145	
04	.450	.005	.0105	.0290	
05	.481	.005	.0132	.0366	
06	.500	.005	.0163	.0452	
08	.563	.010	.0272	.0753	
10	.675	.010	.0379	.105	
12	.719	.010	.0671	.186	
16	.813	.010	.0942	.261	
20	.813	.010	.220	.609	
24	.911	.010	.291	.805	
28	.980	.015	.404	1.120	
32	1.094	.015	.503	1.390	



AEROSPACE STANDARD

(R) NUT, COUPLING

AS4326™
SHEET 2 OF 4

REV.

A



Documents

Document Sharing Hub