

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
C

AS4680™

FEDERAL SUPPLY CLASS
4730

RATIONALE

ADDED CONDUCTIVE HIGH PURITY ALUMINUM COATING FOR ALUMINUM ALLOY FITTINGS.

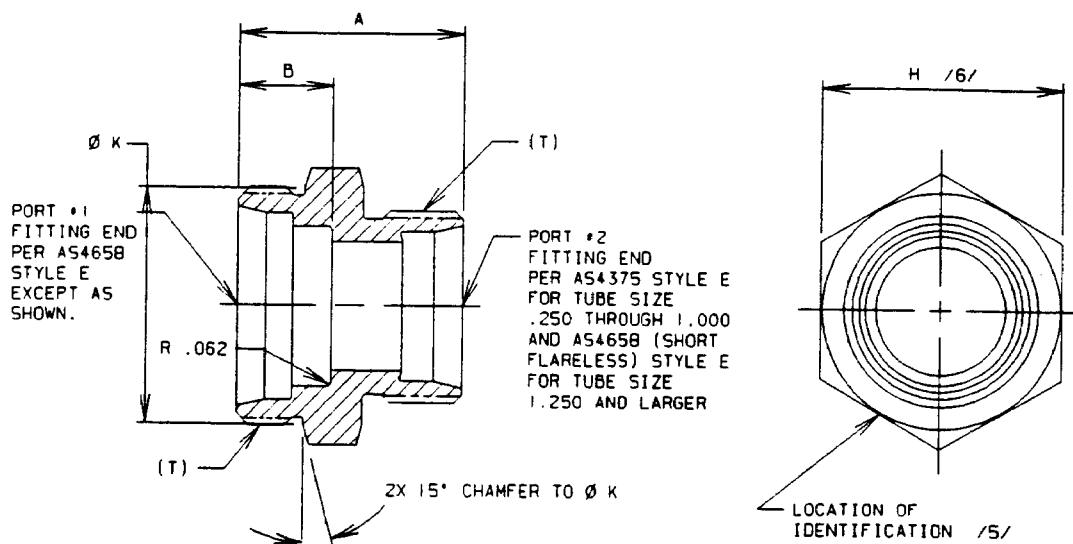



FIGURE 1 - FITTING, UNION, REDUCER

TABLE 1 - DIMENSIONS

PORT #1 SIZE /6/ /18/	A PORT #2 SIZE 04	A PORT #2 SIZE 06	A PORT #2 SIZE 08	A PORT #2 SIZE 10	A PORT #2 SIZE 12	A PORT #2 SIZE 16	A PORT #2 SIZE 20	A PORT #2 SIZE 24
20	1.291	1.307	1.400	1.463	1.526	1.526	--	--
24	--	--	--	--	1.589	1.589	1.301	--
28	--	--	--	--	--	1.589	1.364	1.364

SAE values your input. To provide feedback on this Technical Report, please visit <http://standards.sae.org/AS4680C>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: AS18280 /4/



AEROSPACE STANDARD

FITTING, UNION, REDUCER, SHORT FLARELESS
AND FLARELESS TO BOSS

AS4680™
SHEET 1 OF 4

REV.
C

Documents

TABLE 2 - PORT SIZES, CORRESPONDING THREADS, HEX SIZES AND HOLE DEPTH

PORT SIZE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3A	B	H	K
02	.125	.3125-24UNJF	--	--	--
03	.188	.3750-24UNJF	--	--	--
04	.250	.4375-20UNJF	--	--	--
05	.312	.5000-20UNJF	--	--	--
06	.375	.5625-18UNJF	--	--	--
08	.500	.7500-16UNJF	--	--	--
10	.625	.8750-14UNJF	--	--	--
12	.750	1.0625-12UNJ	--	--	--
14	.875	1.1875-12UNJ	--	--	--
16	1.000	1.3125-12UNJ	--	--	--
20	1.250	1.5625-12UNJ	.650	1.615-1.630	1.605
24	1.500	1.8125-12UNJ	.682	1.865-1.880	1.855
28	1.750	2.1250-12UNJ	.682	2.240-2.260	2.230

NOTES

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- a. CODE LETTER T: TYPE 6Al-4V TITANIUM ALLOY BAR PER AMS4928
- b. CODE LETTER V: TYPE 15-5PH CORROSION RESISTANT STEEL BAR PER AMS5659
- c. CODE LETTER W: TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124

2. HEAT TREATMENT:

- a. MATERIAL CODE LETTER T: NONE
- b. MATERIAL CODE LETTER V: HEAT TREAT TO CONDITION H-1075 PER AMS2759/3
- c. MATERIAL CODE LETTER W: NONE

	AEROSPACE STANDARD	AS4680™	REV.
	FITTING, UNION, REDUCER, SHORT FLARELESS AND FLARELESS TO BOSS	SHEET 2 OF 4	9



Documents

Document Sharing Hub