



AEROSPACE STANDARD

AS5261™**REV. A**

Issued 2008-08
Revised 2014-04
Reaffirmed 2025-02

Superseding AS5261

(R) Contract, Wire Barrel, Crimp Style

RATIONALE

Revision is required to correct numerous dimensional values in the tables, add table to show detail sheet wire barrel type, update references and align specification with current SAE formatting guidelines.

AS5261A has been reaffirmed to comply with the SAE Five-Year Review policy.

1. SCOPE

1.1 Scope

This specification provides dimensional standards for crimp type contact wire barrel design and is a replacement for MS3190. Some wire barrel designs may exist in AS39029 but are not considered approved for future use, therefore, will not appear in this specification. The crimp barrel sizes listed in this document have been standardized in AS39029 and AS22520 specifications, tools and contacts are available to support these listed sizes. These crimp barrel requirements shall be used for any contact, regardless of whether it is a standard or non-standard contact configuration. The specification lists details for three types of wire barrels: A, B, and C. Wire barrel type A is not recommended for new design. Table 4 lists each AS39029 detail sheet wire barrel type.

2. APPLICABLE DOCUMENTS

The following publications form a part of this document to the extent specified herein. The latest issue of SAE publications shall apply. The applicable issue of other publications shall be the issue in effect on the date of the purchase order. In the event of conflict between the text of this document and references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

AS39029 Contacts, Electrical Connector, General Specification For

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2025 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:
Full document details: SAE AS5261A

For more information on this standard, visit
<https://www.sae.org/standards/content/AS5261A/>

**Documents**

Document Sharing Hub

2.2 Military Specifications

Available from DLA Document Services, Building 4/D, 700 Robbins Avenue, Philadelphia, PA 19111-5094, Tel: 215-697-6396, <http://quicksearch.dla.mil/>.

MIL-DTL-22520 Crimping Tools, Wire Termination, General Specification For

MIL-I-81969 Installation and Removal Tools, Connector, Electrical, Contact, General Specification For

3. NOTES

- 3.1 A change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions, not editorial changes, have been made to the previous issue of this document. An (R) symbol to the left of the document title indicates a complete revision of the document, including technical revisions. Change bars and (R) are not used in original publications, nor in documents that contain editorial changes only.

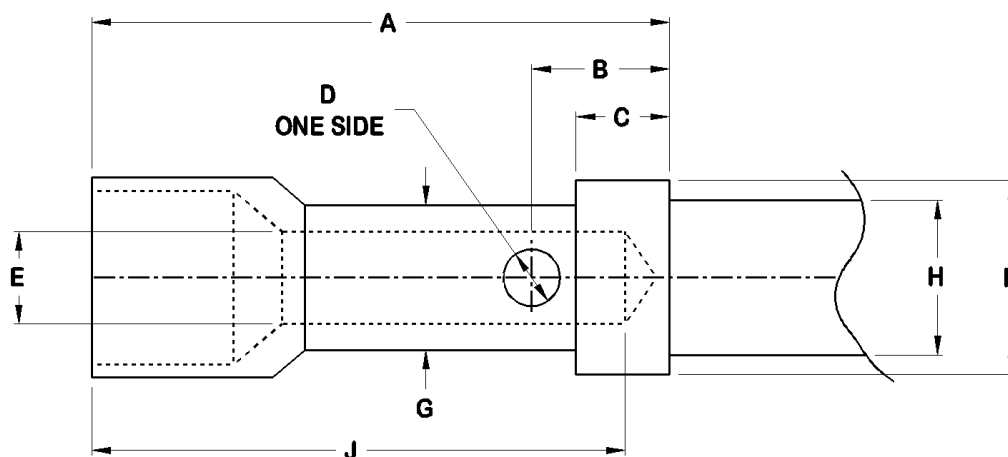


FIGURE 1 - TYPE A
CONFIGURATION AND DIMENSIONS

TYPE "A" NOT RECOMMENDED FOR NEW CONNECTOR DESIGN AFTER 18 OCT 1966. USE TYPE "B" OR "C".

TABLE 1 - BARREL SIZE AND DIMENSIONS - TYPE A

Barrel Size	Wire Range	A	B	C	D Diameter	E Diameter	F Diameter	G Diameter	H Diameter Maximum	J
20	20-22-24	.308	.063	.033	.032	.050	.103	.078	.082 (2.08)	.298
		(7.82)	(1.60)	(0.84)	(0.81)	(1.27)	(2.62)	(1.98)		(7.57)
		.304	.053	.029	.026	.048	.100	.076		.267
		(7.72)	(1.35)	(0.74)	(0.66)	(1.22)	(2.54)	(1.93)		(6.78)

NOTES:

1. Material, finish and machined surfaces, shall be as specified on the applicable procurement specification or detail specification sheet for the contact.
2. Dimensions are in inches unless otherwise specified. Metric equivalents are given for information only and are based upon 1.000 inch (25.4 mm). Metric equivalents are in parentheses.
3. All dimensions shown are for finished parts after plating.
4. All diameters to be concentric with each other within .004 inches (0.1 mm) Total Indicator Reading (TIR).
5. Break all sharp edges and remove all burrs.
6. For crimp tools and positioners, see applicable AS39029 detail sheet.
7. See AS22520, AS5259, AS5259/1, and AS39029 for performance requirements of the crimped termination.
8. Type A contact barrels are not recommended for new design (see requirement).