

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV.
B**

AS5756™/2

FEDERAL SUPPLY CLASS
6145

RATIONALE


AS5756/2 DETAIL SPECIFICATION IS BEING STABILIZED BECAUSE THE PROCESSES/PRODUCT IS CONSIDERED MATURE AND THE COMMITTEE DOES NOT ANTICIPATE FUTURE TECHNICAL CHANGES. STABILIZATION DOES NOT IMPLY THE PROCESS OR PRODUCT IS UNACCEPTABLE FOR APPLICATIONS FOR WHICH IT IS DESIGNED. ANY TECHNICAL CHANGES NOTED BY A SUPPLIER OR USER WHICH RESULTS IN A PRODUCT OR REQUIREMENT CHANGE WILL BE ADDRESSED BY A NEW REVISION. QUALIFIED SUPPLIERS ARE STILL MAINTAINED.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8D WIRE AND CABLE COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS5756/2B/>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8D

PROCUREMENT SPECIFICATION: AS5756



AEROSPACE STANDARD

CABLE, POWER, ELECTRICAL, 600 VOLTS,
PORTABLE, SINGLE CONDUCTOR,
OZONE RESISTANT

AS5756™/2

**REV.
B**

Documents

Copyright © 2022 SAE International
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
 Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2004-06 REVISED 2011-11 REAFFIRMED 2016-11 STABILIZED 2022-03

NOTICE

THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS5756.

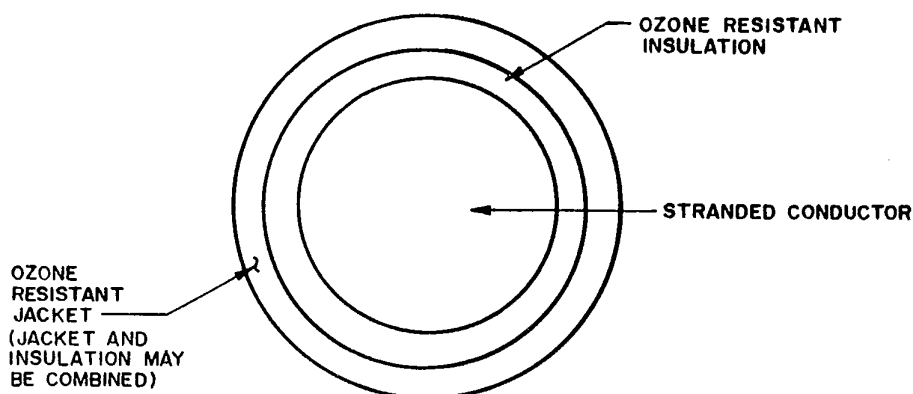


FIGURE 1 - CONDUCTOR EXAMPLE

REQUIREMENTS (SEE AS5756 AND TABLE 1):

CONSTRUCTION

- FIRST - COPPER CONDUCTOR, SEE TABLE I OF AS5756 FOR REQUIREMENTS, SIZES 10 AWG AND SMALLER SHALL BE TIN-COATED, SIZES 8 AWG AND LARGER SHALL BE UNCOATED.
- SECOND - SEPARATOR, REQUIRED WHERE UNCOATED CONDUCTORS ARE USED, OPTIONAL WHERE TIN-COATED CONDUCTORS ARE USED.
- THIRD - INSULATION OF OZONE RESISTANT SYNTHETIC RUBBER (SEE TABLE 1 FOR THICKNESS), COLORED BLACK OR GRAY.
- FOURTH - JACKET OF OZONE RESISTANT SYNTHETIC RUBBER (SEE TABLE 1 FOR THICKNESS), COLORED BLACK. CABLE SURFACE MARKING REQUIRED.

OZONE RESISTANCE - REQUIRED

APPLICATIONS

1. THE INSULATING AND JACKETING MATERIALS SHALL BE RESISTANT TO DEGRADATION DUE TO SUNLIGHT, OZONE, AND OTHER FORMS OF WEATHERING EXPOSURE. THIS CABLE IS DESIGNED TO BE SUITABLE FOR USE WHERE IT MAY BE EXPOSED TO THESE CONDITIONS.
2. CABLES COVERED UNDER THIS DETAIL SPECIFICATION ARE DESIGNED FOR USE IN CABLE ASSEMBLIES CONFORMING TO AS7974. THESE CABLES ARE SUITABLE ALTERNATIVES FOR THE SINGLE CONDUCTOR CABLES SPECIFIED IN AS5756 (SEE AS5756/1).
3. EXAMPLES OF TYPICAL INSULATING AND JACKETING MATERIALS INCLUDE ETHYLENE PROPYLENE RUBBER (EPR) AND POLYCHLOROPRENE, RESPECTIVELY.

	AEROSPACE STANDARD	AS5756™/2 SHEET 1 OF 2	REV. B
	CABLE, POWER, ELECTRICAL, 600 VOLTS, PORTABLE, SINGLE CONDUCTOR, OZONE RESISTANT		



Documents

Document Sharing Hub