

REV.
C

AS5961™

FEDERAL SUPPLY CLASS
4720

RATIONALE

CORRECT TABLE 1 HEADINGS TO MATCH FIGURE 1 DIMENSIONS.

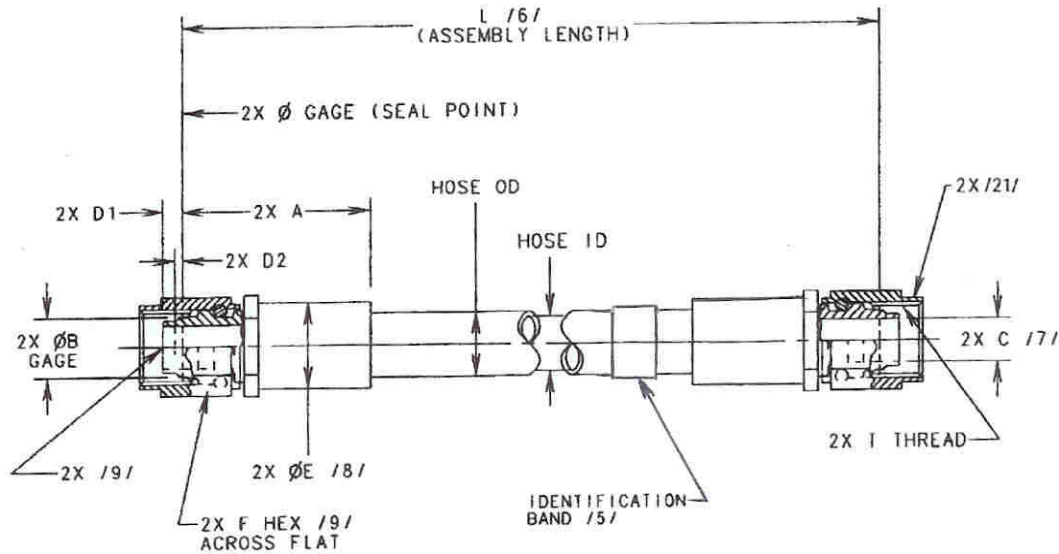


FIGURE 1 - HOSE ASSEMBLY DIMENSIONS – SEE TABLE 1


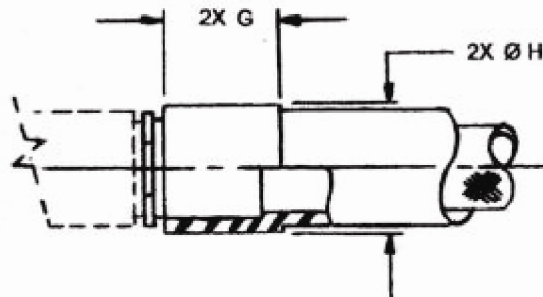


FIGURE 2 - INTEGRAL FIRESLEEVE CUFF – SEE TABLE 5 / 13 /

For more information on this standard, visit
<https://www.sae.org/standards/content/AS5961C/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS5960 / 2 /



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE
CRES BRAID REINFORCED, 400 °F, 5080 PSI
FLARELESS, STRAIGHT TO STRAIGHT

AS5961™
SHEET 1 OF 5

REV.
C

Documents

Copyright © 2025 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, or used for text and data mining, AI training, or similar technologies, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 1-877-606-7323 (U.S. and Canada only)

Fax: 724-776-0790

Tel: 1-724-776-4970 (outside U.S. and Canada)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - HOSE ASSEMBLY DIMENSIONS (INCHES)

HOSE ASSEMBLY AS5961 SIZE CODE	SIZE	FITTING TYPE /17/	THREAD T PER AS8879	A MAX	ØB GAGE BASIC	ØC /7/ MIN	(D1) /9/	(D2) /9/	ØE /8/ MAX	(F) HEX
E	.250	S	.4375-28 UNJEF-3B	2.64	.2930	.113	.16	.055	.88	.56
E	.250	E	.5625-24 UNJEF-3B	2.74	.4120	.113	.16	.055	.88	.69
G	.375	R	.4375-28 UNJEF-3B	2.90	.2930	.113	.16	.055	1.00	.56
G	.375	S	.5625-24 UNJEF-3B	2.94	.4120	.192	.16	.055	1.00	.69
G	.375	E	.7500-20 UNJEF-3B	3.07	.5600	.192	.19	.066	1.00	.88
H	.500	R	.5625-24 UNJEF-3B	3.19	.4120	.192	.16	.055	1.20	.69
H	.500	S	.7500-20 UNJEF-3B	3.32	.5600	.281	.19	.066	1.20	.88
H	.500	E	.8750-20 UNJEF-3B	3.39	.6730	.281	.20	.066	1.20	1.00
J	.625	R	.7500-20 UNJEF-3B	3.55	.5600	.281	.19	.066	1.41	.88
J	.625	S	.8750-20 UNJEF-3B	3.62	.6730	.349	.20	.066	1.41	1.00
J	.625	E	1.0625-18 UNJEF-3B	3.87	.8100	.349	.23	.066	1.41	1.25
K	.750	R	.8750-20 UNJEF-3B	3.89	.6730	.349	.20	.066	1.69	1.00
K	.750	S	1.0625-18 UNJEF-3B	3.95	.8100	.434	.23	.066	1.69	1.25
K	.750	E	1.3125-16 UNJ-3B	4.06	1.0620	.434	.30	.066	1.69	1.50
M	1.000	R	1.0625-18 UNJEF-3B	4.42	.8100	.434	.23	.066	2.00	1.25
M	1.000	S	1.3125-16 UNJ-3B	4.54	1.0620	.638	.30	.066	2.00	1.50
M	1.000	E	1.6250-16 UNJ-3B	4.64	1.3160	.638	.30	.066	2.00	1.81
N	1.250	--	--	--	--	--	--	--	--	--
N	1.250	S	1.6250-16 UNJ-3B	4.72	1.3160	.786	.30	--	2.25	1.81
N	1.250	--	--	--	--	--	--	--	--	--

TABLE 2 - HOSE AND SLEEVE OUTSIDE DIAMETER (INCHES) /10/

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °F	TOLER- ANCE	SIZE .250	SIZE .375	SIZE .500	SIZE .625	SIZE .750	SIZE 1.000	SIZE 1.250
-	(-) INDICATES HOSE ONLY NO SLEEVE (REFER TO AS5960) REF	400 °F	MAX MIN	.510 .450	.620 .560	.760 .700	.960 .835	1.120 .995	1.430 1.305	1.685 1.560
C	FIRE SLEEVE (AS1072 SIL-FG) (15 MINUTES) /11/ /12/ /14/	400 °F	MAX MIN	.970 .810	1.090 1.000	1.220 1.060	1.500 1.260	1.590 1.470	1.950 1.780	2.190 1.940
F	ABRASION SLEEVE SHRINK-ON (POLYOLEFIN AS1073-CODE B) /16/	275 °F	MAX MIN	.560 .480	.700 .590	.910 .760	1.045 .895	1.205 1.080	1.530 1.370	1.785 1.660
H	FIRE SLEEVE, INTEGRAL SILICONE (15 MINUTES) /14/	400 °F	MAX MIN	.815 .755	.940 .880	1.060 1.000	1.200 1.075	1.420 1.295	1.740 1.615	2.000 1.875
K	INTEGRAL ABRASION SLEEVE (BRAIDED POLYESTER) /15/	300 °F	MAX MIN	.590 .530	.710 .650	.860 .735	1.065 .885	1.205 1.130	1.530 1.405	1.815 1.690

TABLE 3 - HOSE ASSEMBLY LENGTH TOLERANCE

HOSE ASSEMBLY LENGTH	TOLERANCE
UNDER 18 INCHES	±.125 INCH
18 TO 36 INCHES, EXCLUSIVE	±.250 INCH
36 TO 50 INCHES, EXCLUSIVE	±.500 INCH
50 INCHES AND OVER	±1%

	AEROSPACE STANDARD	AS5961™ SHEET 2 OF 5	REV. 6
	HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE CRES BRAID REINFORCED, 400 °F, 5080 PSI FLARELESS, STRAIGHT TO STRAIGHT		



Documents

Document Sharing Hub