


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	FEDERAL SUPPLY CLASS 4720 RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
SAE values your input. To provide feedback on this Technical Report, please visit http://standards.sae.org/AS6014B		THIRD ANGLE PROJECTION 	
CUSTODIAN: G-3/G-3D		PROCUREMENT SPECIFICATION: AS5951 /2/	
		AEROSPACE STANDARD HOSE ASSEMBLY, POLYTETRAFLUOROTHYLENE, PARA ARAMID REINFORCED, 275 °F, 4000 PSI MAX, FLARELESS, TITANIUM FITTINGS, STRAIGHT TO 45 DEGREE	
		AS6014™	REV. B

ISSUED 2009-02 REVISED 2011-12 STABILIZED 2019-04

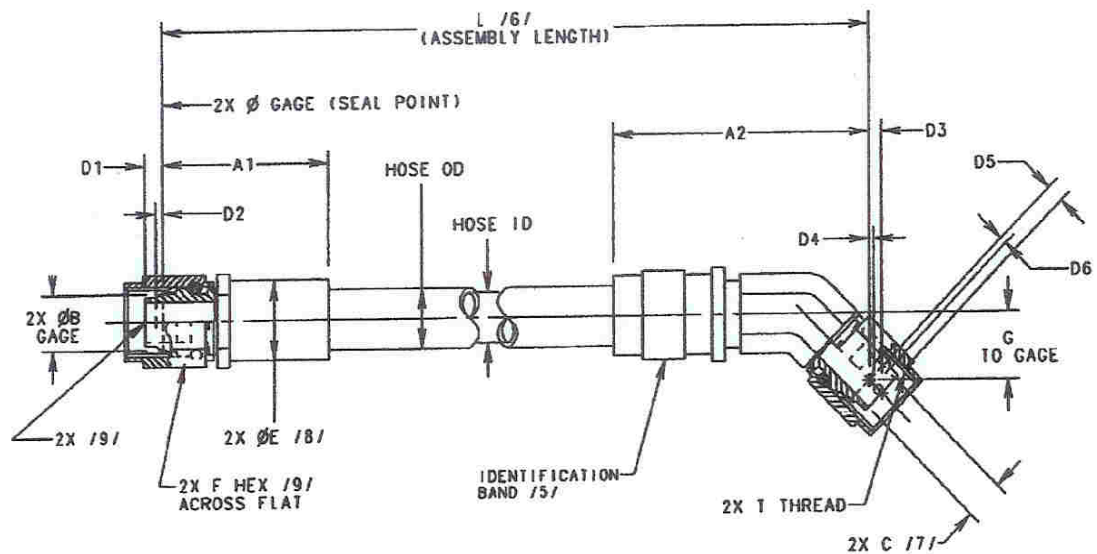


FIGURE 1 - FLARELESS HOSE ASSEMBLY, STRAIGHT TO 45 DEGREE ELBOW

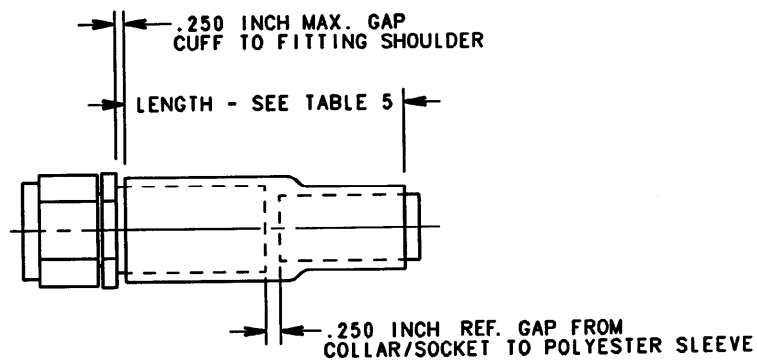


FIGURE 2 - POLYESTER ABRASION SLEEVE CUFF /20/

	AEROSPACE STANDARD		AS6014™ SHEET 1 OF 5	REV. B
	HOSE ASSEMBLY, POLYTETRAFLUOROTHYLENE, PARA ARAMID REINFORCED, 275 °F, 4000 PSI MAX, FLARELESS, TITANIUM FITTINGS, STRAIGHT TO 45 DEGREE			





Documents

Document Sharing Hub