

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS7928™/10

FEDERAL SUPPLY CLASS
5940

RATIONALE


AS7928/10 IS BEING STABILIZED BECAUSE THE COMMITTEE DOES NOT ANTICIPATE FUTURE TECHNICAL CHANGES. STABILIZATION DOES NOT IMPLY THE PROCESS OR PRODUCT IS UNACCEPTABLE FOR APPLICATIONS FOR WHICH IT IS DESIGNED. THE SPLICE DEFINED BY THIS SPECIFICATION IS THE TIN WHISKER RESISTANT VERSION OF THE AS7928/5 SPLICE. THERE ARE NO QUALIFIED SUPPLIERS. FOR PROCUREMENT, USERS ARE RECOMMENDED TO USE THE QUALITY ASSURANCE REQUIREMENTS OF AS7928 AND A QUALIFIED AS7928/5 SUPPLIER. ANY TECHNICAL CHANGES NOTED BY A SUPPLIER OR USER WHICH RESULTS IN A PRODUCT OR REQUIREMENT CHANGE WILL BE ADDRESSED BY A NEW REVISION.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE AE-8C2 TERMINATING DEVICES AND TOOLING COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS7928/10D/>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8C2

PROCUREMENT SPECIFICATION: AS7928



AEROSPACE STANDARD

TERMINALS, LUG AND SPLICES, CONDUCTOR,
CRIMP STYLE, SPLICE, ELECTRIC, TIN WHISKER RESISTANT
(PERMANENT, TYPE II, CLASS 1)
FOR 105 °C TOTAL CONDUCTOR TEMPERATURE

AS7928™/10

REV.
D



Documents

Copyright © 2023 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2007-09 REAFFIRMED 2012-08 REVISED 2022-10 STABILIZED 2023-07

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS7928. FOR U.S. NAVY AND AIR FORCE DEPARTMENTS, AS7928/10 SHALL NOT BE USED (REFER TO AS81824).

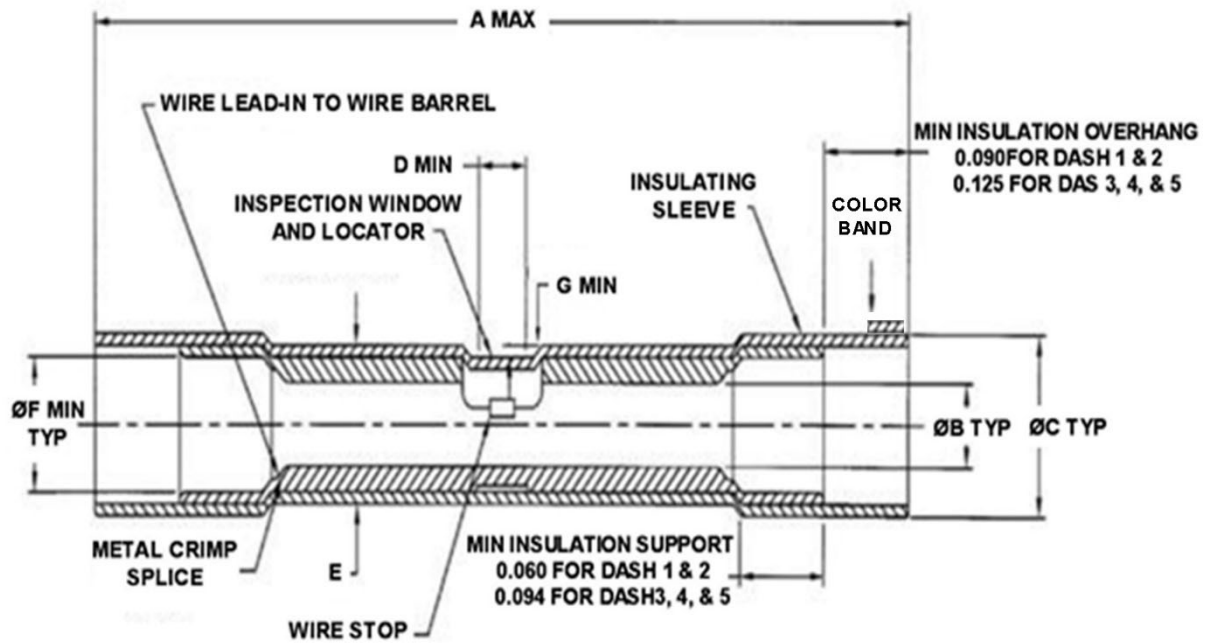


FIGURE 1 - SPLICE CONSTRUCTION

	AEROSPACE STANDARD		AS7928™/10 SHEET 1 OF 3	REV. D
	TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, SPLICE, ELECTRIC, TIN WHISKER RESISTANT (PERMANENT, TYPE II, CLASS 1) FOR 105 °C TOTAL CONDUCTOR TEMPERATURE			



Documents

Document Sharing Hub