

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS81511™/55

FEDERAL SUPPLY CLASS
5935

RATIONALE

LIMITED SCOPE REVISION IS REQUIRED TO CORRECT FIGURE 1, THE DIMENSION K LABEL AND NOTATION "OVER KNURL" WERE OMITTED DURING THE AS CONVERSION. THE FIGURE 1 DRAWING NEEDS TO BE CORRECTED TO ADD THE K DIMENSION AND THE NOTATION.

NOTICE

THE COMPLETE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS81511.


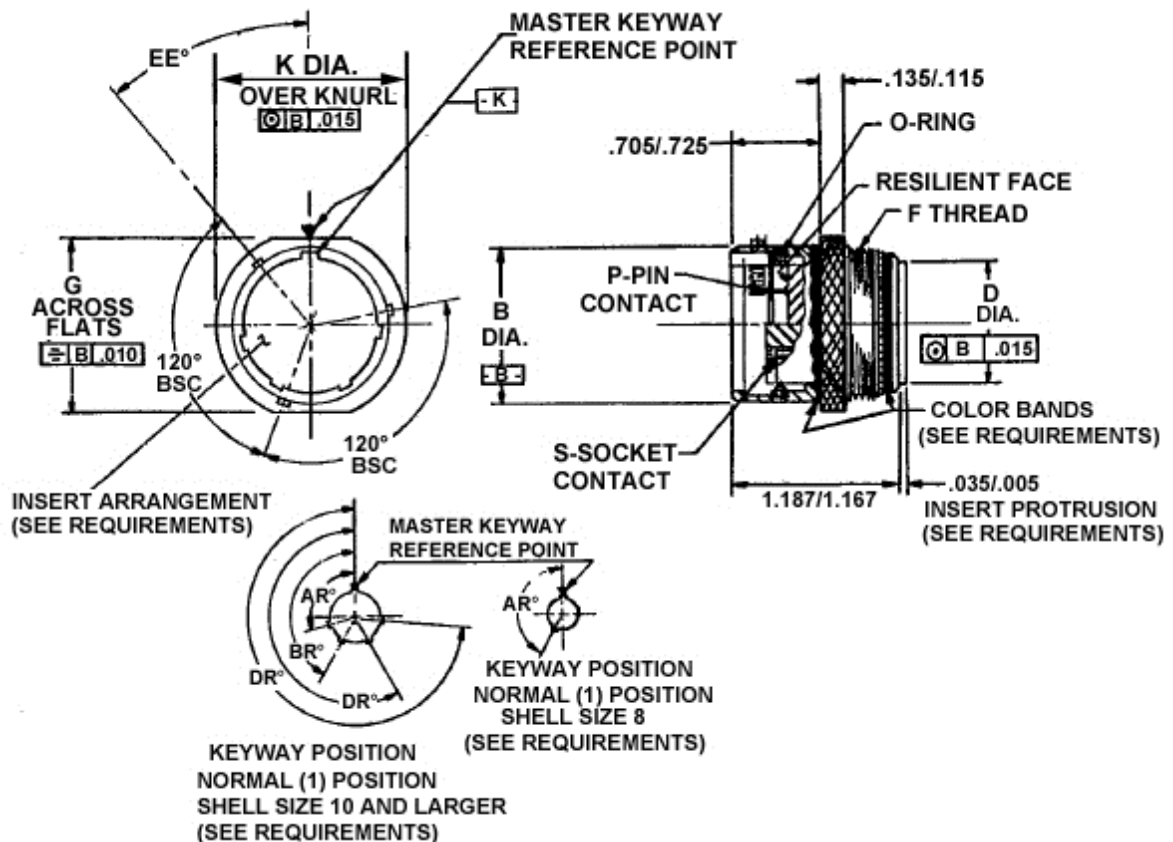


FIGURE 1 - CONNECTOR RECEPTACLE, CABLE CONNECTING (SERIES 4)

For more information on this standard, visit
<https://www.sae.org/standards/content/AS81511/55A>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS81511



AEROSPACE STANDARD

CONNECTOR, RECEPTACLE, CABLE CONNECTING, ELECTRICAL,
CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT
RESISTING, INDIVIDUAL RELEASE, CRIMP TYPE CONTACTS
(CLASS A, F, AND W - SERIES 4)

AS81511™/55
SHEET 1 OF 3

REV.
A

Documents

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - FIGURE 1 METRIC EQUIVALENTS

INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS	INCHES	MILLIMETERS
.005	0.13	.015	0.38	.555	14.10	1.167	29.64
.010	0.25	.035	0.89	.575	14.61	1.187	30.15

TABLE 2 - FIGURE 1 DIMENSIONS

SHELL SIZE	B Ø	D Ø	F THREAD	G ACROSS FLATS	K Ø	AR° BSC	BR° BSC	CR° BSC	DR° BSC	EE° BSC POSITION					
										1	2	3	4	5	6
8	.553	.430	1/2-28UNEF-2A	.565	.780	128°	--	--	--	40	40	40	40	40	40
	(14.05)	(10.92)		(14.35)	(19.81)										
	.547	.424		.553	.760										
10	(13.89)	(10.77)		(14.05)	(19.30)										
	.678	.555	5/8-28UN-2A	.690	.900	105°	140°	215°	265°	60	46	46	60	89	60
	(17.22)	(14.10)		(17.53)	(22.86)										
	.672	.549		.678	.880										
14	(17.07)	(13.94)		(17.22)	(22.35)										
	.928	.805	7/8-28UN-2A	.940	1.150	105°	140°	215°	265°	60	46	46	60	89	60
	(23.57)	(20.45)		(23.88)	(29.21)										
	.922	.799		.928	1.130										
16	(23.42)	(20.29)		(23.57)	(28.70)										
	1.054	.930	1-28UN-2A	1.066	1.280	105°	140°	215°	265°	50	50	50	50	50	50
	(26.77)	(23.63)		(27.08)	(32.51)										
	1.048	.924		1.054	1.260										
18	(26.62)	(23.47)		(26.77)	(32.00)										
	1.178	1.055	1 1/8-28UN-2A	1.190	1.400	105°	140°	215°	265°	50	50	50	50	50	50
	(29.92)	(26.80)		(30.23)	(35.56)										
	1.172	1.049		1.178	1.380										
	(29.77)	(26.64)		(29.92)	(35.05)										

REQUIREMENTS: ALL REQUIREMENTS SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF AS81511.


1. DESIGN:

CONNECTORS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE 1 AND TABLE 2. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED ON 1 INCH = 25.4 MM. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 0.016 INCHES. NORMAL MATING KEYWAY POSITION SHOWN IN FIGURE 1. FOR ALTERNATE KEYWAY POSITIONS, SEE AS81511, FIGURE 4. COLOR BANDS SHALL BE BLUE IN COLOR, .100 MAX. WIDTH AND SHALL BE VISIBLE WHEN MOUNTED. INSERT PROTRUSION FOR INSERTS CONTAINING SIZE 12 CONTACTS SHALL BE .070/.020. FOR DIMENSIONS NOT SHOWN HEREIN, REFER TO AS81511 FIGURE 6.

2. FOR INSERT ARRANGEMENTS, SEE AS81511, APPENDIX A.

3. PART NUMBER:

THE CONNECTOR PART NUMBER WILL CONSIST OF THE LETTER M, THE BASIC SPECIFICATION NUMBER/APPLICABLE SPECIFICATION SHEET, AND THE APPLICABLE ALPHA-NUMERIC CHARACTERS ON THE CONNECTOR SHELL. THE PART NUMBER SHALL BE FORMULATED AS IN THE FOLLOWING EXAMPLE: M81511/55FD01P1.

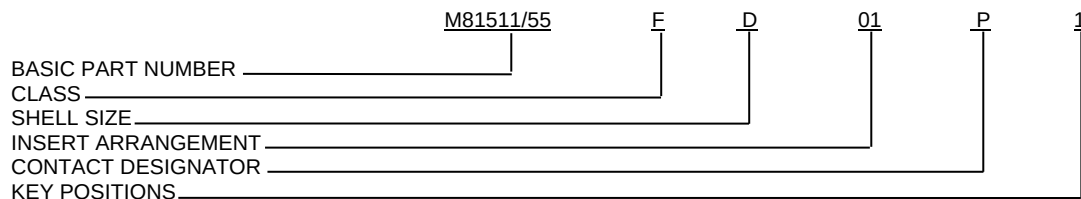

	AEROSPACE STANDARD		AS81511™/55 SHEET 2 OF 3	REV. A
	CONNECTOR, RECEPTACLE, CABLE CONNECTING, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING, INDIVIDUAL RELEASE, CRIMP TYPE CONTACTS (CLASS A, F, AND W - SERIES 4)			

 **Documents**
Document Sharing Hub