

SAE Executive Standards Committee Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

AS81659™/9

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISION IS REQUIRED TO UPDATE THE CONNECTOR INSERT AND INSTALLING/REMOVAL TOOL REFERENCES


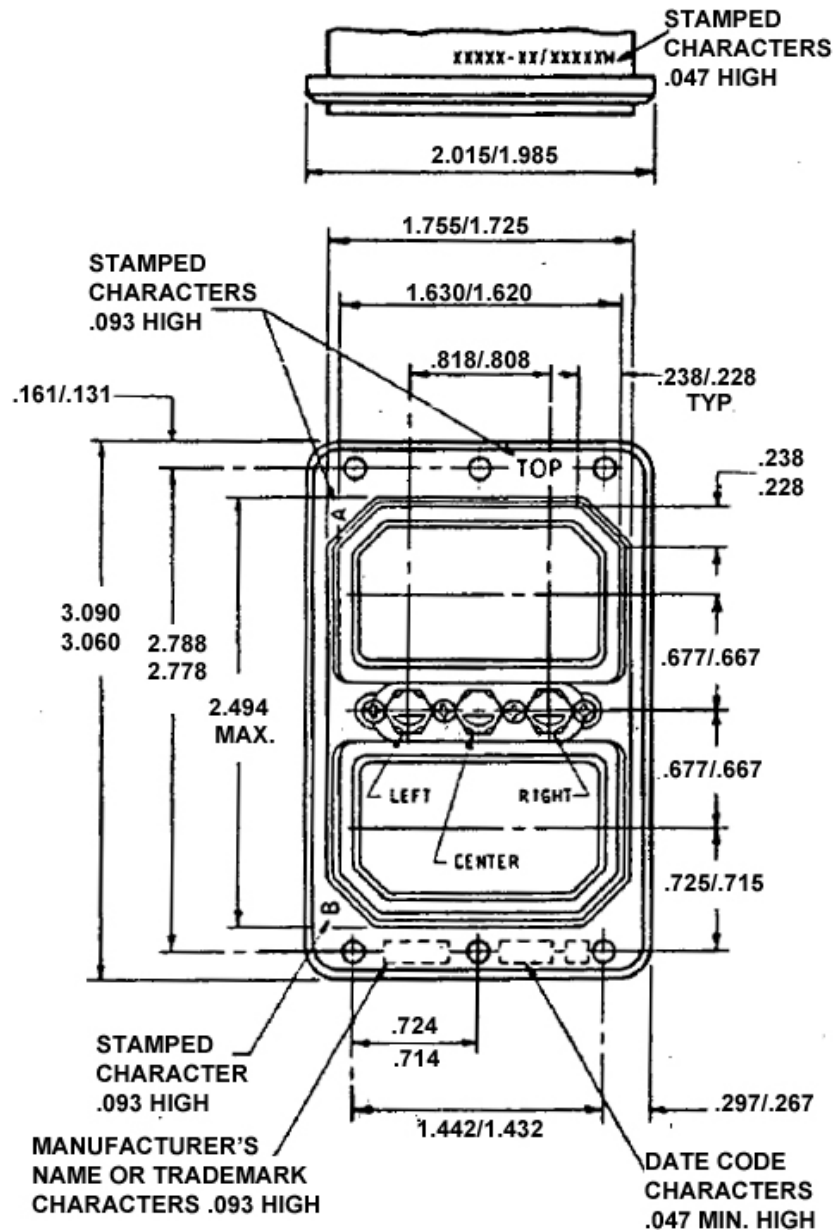


FIGURE 1 - CONNECTOR CONFIGURATIONS AND DIMENSIONS

For more information on this standard, visit
<https://www.sae.org/standards/content/AS81659/9B/>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C1

PROCUREMENT SPECIFICATION: AS81659



AEROSPACE STANDARD

CONNECTORS, ELECTRICAL, RECTANGULAR,
RECEPTACLE ENVIRONMENT RESISTANT, CRIMP
CONTACTS, DOUBLE INSERT, TYPE II, CLASS 1
(-65 °C TO +125 °C), SERIES 1, SHELL DESIGNATOR A

AS81659™/9
SHEET 1 OF 3

REV.
B

Documents

Copyright © 2022 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - CONTACT LOCATION DIMENSIONS

CONTACT SIZE	LTR	DIMENSIONS	
		MIN	MAX
22	A	.220	.277
20	A	.353	.410
16	A	.175	.232

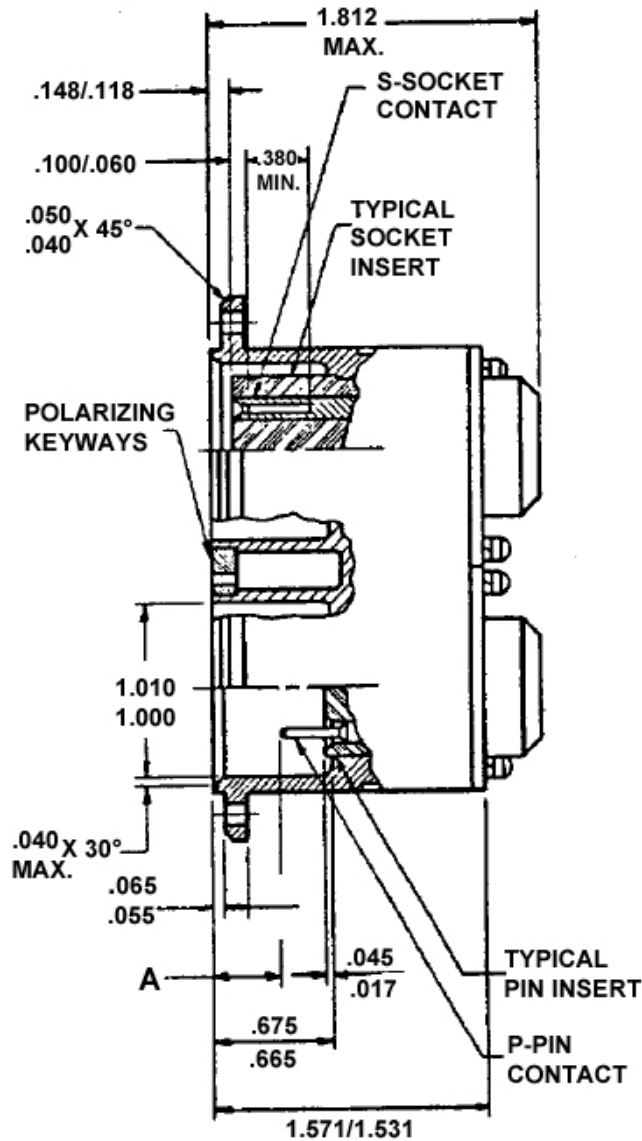


FIGURE 1 - CONNECTOR CONFIGURATIONS AND DIMENSIONS (CONTINUED)

	AEROSPACE STANDARD	AS81659™/9 SHEET 2 OF 3	REV. B
	CONNECTORS, ELECTRICAL, RECTANGULAR, RECEPTACLE ENVIRONMENT RESISTANT, CRIMP CONTACTS, DOUBLE INSERT, TYPE II, CLASS 1 (-65 °C TO +125 °C), SERIES 1, SHELL DESIGNATOR A		



Documents

Document Sharing Hub