

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS85449™/4

FEDERAL SUPPLY CLASS
5340

RATIONALE

EXISTING QPL NOTE REVISED TO THE LATEST STANDARDIZED QML REQUIREMENT NOTE. INVENTORIED PARTS DISPOSITION NOTE ADDED. CHANGE BAR NOTE ADDED. GENERAL UPDATES INCLUDED.


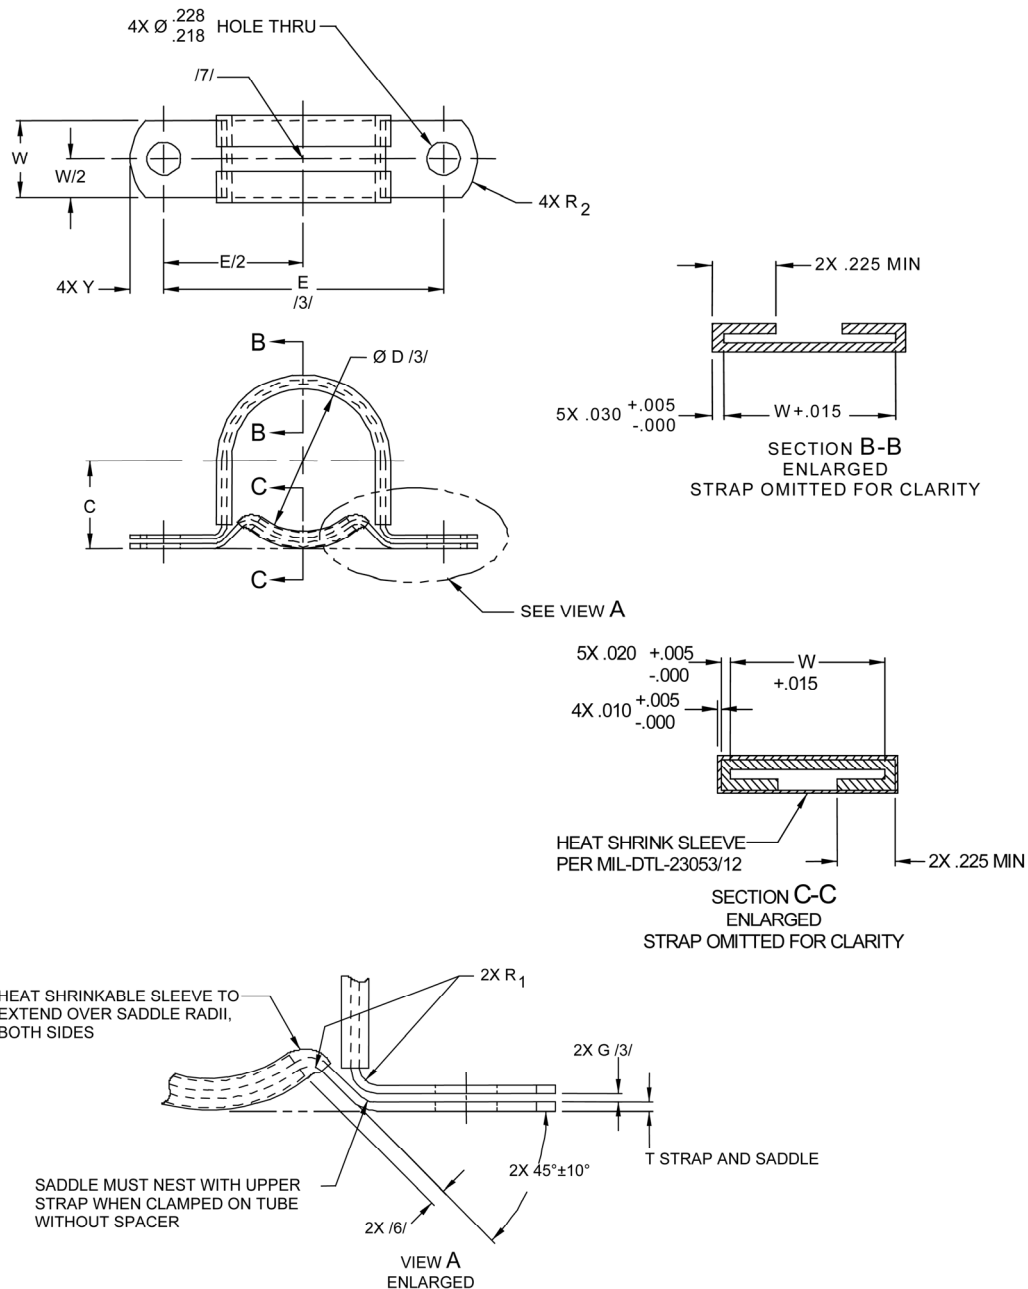


FIGURE 1

For more information on this standard, visit
<https://www.sae.org/standards/content/AS85449/4/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3

PROCUREMENT SPECIFICATION: AS85449 /4/



AEROSPACE STANDARD

CLAMP ASSEMBLY, SADDLE TYPE,
CUSHIONED, PTFE

AS85449™/4
SHEET 1 OF 3

REV.
A

Documents

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1 - CLAMP DIMENSIONS

BASIC NO. AS85449/4 SIZE CODE /11/	TUBE SIZE REF	C ±.030	D	E ±.015	G ±.001	R ₁ ±.020	R ₂ ±.03	T TOLERANCE PER AMS2242	W	Y
-10	.625	.433	.625	1.525	.020	.090	.37	.040	.500	.218
-12	.750	.495	.750	1.650	.020	.090	.37	.040	.500	.218
-14	.875	.558	.875	1.775	.020	.090	.37	.040	.500	.218
-16	1.000	.640	1.000	1.958	.030	.109	.50	.050	.625	.250
-18	1.125	.703	1.125	2.083	.030	.109	.50	.050	.625	.250
-20	1.250	.765	1.250	2.208	.030	.109	.50	.050	.625	.250
-24	1.500	.890	1.500	2.458	.030	.109	.50	.050	.625	.250
-28	1.750	1.015	1.750	2.708	.030	.109	.50	.050	.625	.250
-32	2.000	1.153	2.000	3.016	.030	.125	.50	.063	.750	.250
-36	2.250	1.278	2.250	3.266	.030	.125	.50	.063	.750	.250
-40	2.500	1.403	2.500	3.516	.030	.125	.50	.063	.750	.250
-44	2.750	1.528	2.750	3.766	.030	.125	.50	.063	.750	.250
-48	3.000	1.653	3.000	4.016	.030	.125	.50	.063	.750	.250

NOTES:

1. MATERIALS: STRAP AND BASE: CRES 321 SHEET PER AMS5510, EXCEPT THAT A MINIMUM TENSILE STRENGTH OF 100 KSI SHALL BE REQUIRED.

CUSHION: PTFE PER AMS3652 OR AMS3660, EXTRUDED AND HEAT FORMED TO SHAPE, COLOR WHITE. SADDLE CUSHION COVERED WITH HEAT SHRINKABLE SLEEVE PER MIL-DTL-23053/12 (SEE SECTION C-C, SHEET 1).
2. FINISH: STRAP AND BASE: PASSIVATE PER AMS2700, TYPE 6 OR 7.

CUSHION: NONE.
- /3/ THE "D" AND "E" DIMENSION WILL BE MEASURED WITH MANDREL CLAMPED AND A "G" DIMENSION THICKNESS SPACER BETWEEN THE CLAMP FEET. "G" DIMENSION IS FOR THICKNESS OF SHIM REQUIRED TO INSPECT ASSEMBLED CLAMP.
- /4/ PROCUREMENT SPECIFICATION: AS85449 EXCEPT AS SPECIFIED ON THIS STANDARD. PRODUCT MANUFACTURED TO THIS STANDARD SHALL MEET THE REQUIREMENTS SPECIFIED HEREIN AND THE PROCUREMENT SPECIFICATION. ORIGINAL COMPONENT MANUFACTURERS (OCM) AND VALUE ADDED DISTRIBUTORS (VAD) SHALL BE LISTED IN THE NADCAP QUALIFIED MANUFACTURER LIST (QML) FOR THIS PRODUCT TYPE. THE QML IS AVAILABLE AT www.eAuditNet.com.
5. WITH CLAMP ASSEMBLED ON TUBE, NO GAP IS PERMITTED BETWEEN CUSHION AND TUBE FOR UPPER HALF OF STRAP AND CUSHIONED LENGTH OF SADDLE BASE.
- /6/ WITH CUSHION PUSHED TO EITHER END OF STRAP, SUFFICIENT CUSHION SHALL BE AVAILABLE TO PREVENT STRAP FROM CONTACTING TUBE.
- /7/ IDENTIFICATION: MARK THE COMPLETE STANDARD PART NUMBER AND MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE ON STRAP, IN AN AREA NOT COVERED BY THE CUSHION AND SHALL BE VISIBLE PER AS478, METHOD 2A1. THE SADDLE SHALL HAVE THE DASH SIZE IMPRESSION STAMPED IN THE VICINITY OF THE MOUNTING HOLE AWAY FROM ANY BEND RADII.
8. REMOVE ALL BURRS AND SHARP EDGES.
9. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±0°30'.

	AEROSPACE STANDARD		AS85449™/4 SHEET 2 OF 3	REV. A
	CLAMP ASSEMBLY, SADDLE TYPE, CUSHIONED, PTFE			





Documents

Document Sharing Hub