

REV.
B

AS963

FEDERAL SUPPLY CLASS

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.


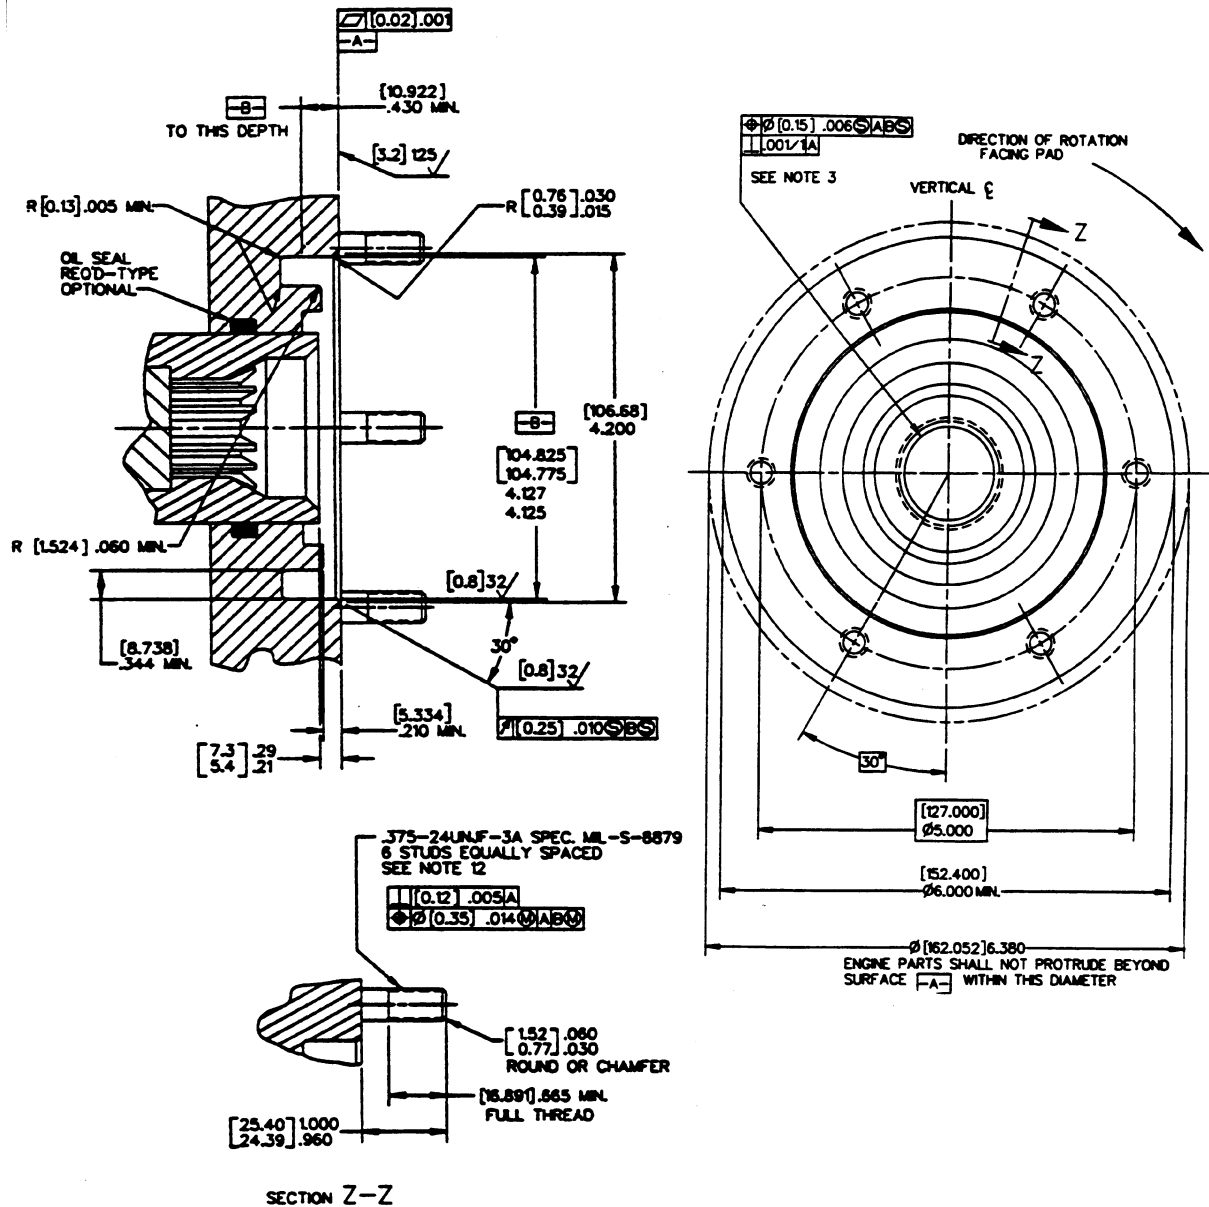


FIGURE 1

THIRD ANGLE PROJECTION



PREPARED BY COMMITTEE AE-1, ENGINE ACCESSORY INSTALLATIONS

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

DRIVE-STUDED, ACCESSORY,
(127) 5.000 BC ROUND,
DESIGN STANDARD FOR

AS963
SHEET 1 OF 2

REV.
B



Documents

Document Sharing Hub

Copyright 2001 Society of Automotive Engineers, Inc.
All rights reserved.

TO PLACE A DOCUMENT ORDER: (724) 776-4970

FAX: (724) 776-0790

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 1

DASH NO.	SPLINE SIZE PD
1	(20.320) 0.800
2	(30.480) 1.200
3	(41.275) 1.625

NOTES:

1. OPERATING SPEEDS AND TORQUES, SHAFT TORSIONAL STRENGTH, AND ACCESSORY WEIGHT AND OVERHUNG MOMENT CAPACITIES SHALL BE SPECIFIED IN THE APPLICABLE POWER SOURCE MODEL SPECIFICATION OR BY THE PROCURING AGENCY.
2. SEE AIR1160 FOR INFORMATION RELATIVE TO THE APPLICATION OF THIS STANDARD.
3. DRIVE SHAFT: DETAILS OF DRIVE SHAFT AND SPLINE DESIGN DATA ARE SHOWN ON AS972. TRUE POSITION AND PERPENDICULARITY OF SPLINE SHALL BE MAINTAINED THROUGH 360° OF ROTATION.
4. LUBRICATION: SPLINE LUBRICATION SHALL BE PROVIDED. METHOD OF LUBRICATION SHALL BE SPECIFIED IN THE APPLICABLE POWER SOURCE MODEL SPECIFICATION OR BY THE PROCURING AGENCY.
5. OIL LEAKAGE: OIL LEAKAGE OUT OF THE DRIVE SHALL NOT EXCEED .003 L PER HOUR. PROVISIONS FOR DRAINING OIL FROM THE DRIVE CAVITY SHALL BE SUPPLIED.
6. ACCESSORY SPACE: SPACE AVAILABLE FOR ACCESSORIES SHALL BE SHOWN ON THE POWER SOURCE INSTALLATION DRAWING.
7. DIMENSIONS: ALL LINEAR DIMENSIONS ARE IN (MILLIMETERS) INCHES. DIMENSIONS AND TOLERANCES: ANSI Y14.5-1982. TRUE POSITION TOLERANCES ARE MAXIMUM MATERIAL CONDITION UNLESS OTHERWISE SPECIFIED.
8. TOLERANCES: LINEAR (± 0.25) $\pm .010$, ANGULAR $\pm 2^\circ$ UNLESS OTHERWISE SPECIFIED.
9. BREAK SHARP EDGES (0.08 TO 0.38) .003 TO .015 UNLESS OTHERWISE SPECIFIED.
10. FINISH: SURFACE TEXTURE PER ANSI/ASME B46.1
11. MATING FLANGE: SEE AS964 FOR DETAILS OF MATING ACCESSORY FLANGE.
12. STUDS: THREADED HOLES IN LIEU OF STUDS MAY BE PROVIDED WHEN SPECIFIED IN THE APPLICABLE MODEL SPECIFICATION.
13. DESIGNATION: THE AS NUMBER WITH DASH NUMBER DEFINES THE CONFIGURATION OF THE DRIVE.
EXAMPLE: AS963 - 2 IS A (127.000) 5.000 BC ROUND QAD DRIVE WITH A (30.480) 1.200 P.D. OUTPUT SPLINE.
14. REFERENCE DOCUMENTS ARE THOSE IN EFFECT ON THE DATE OF ISSUANCE OF THIS DOCUMENT.