

NEW PART STANDARD TO REPLACE MS9708.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9708A. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

AS9708™

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.


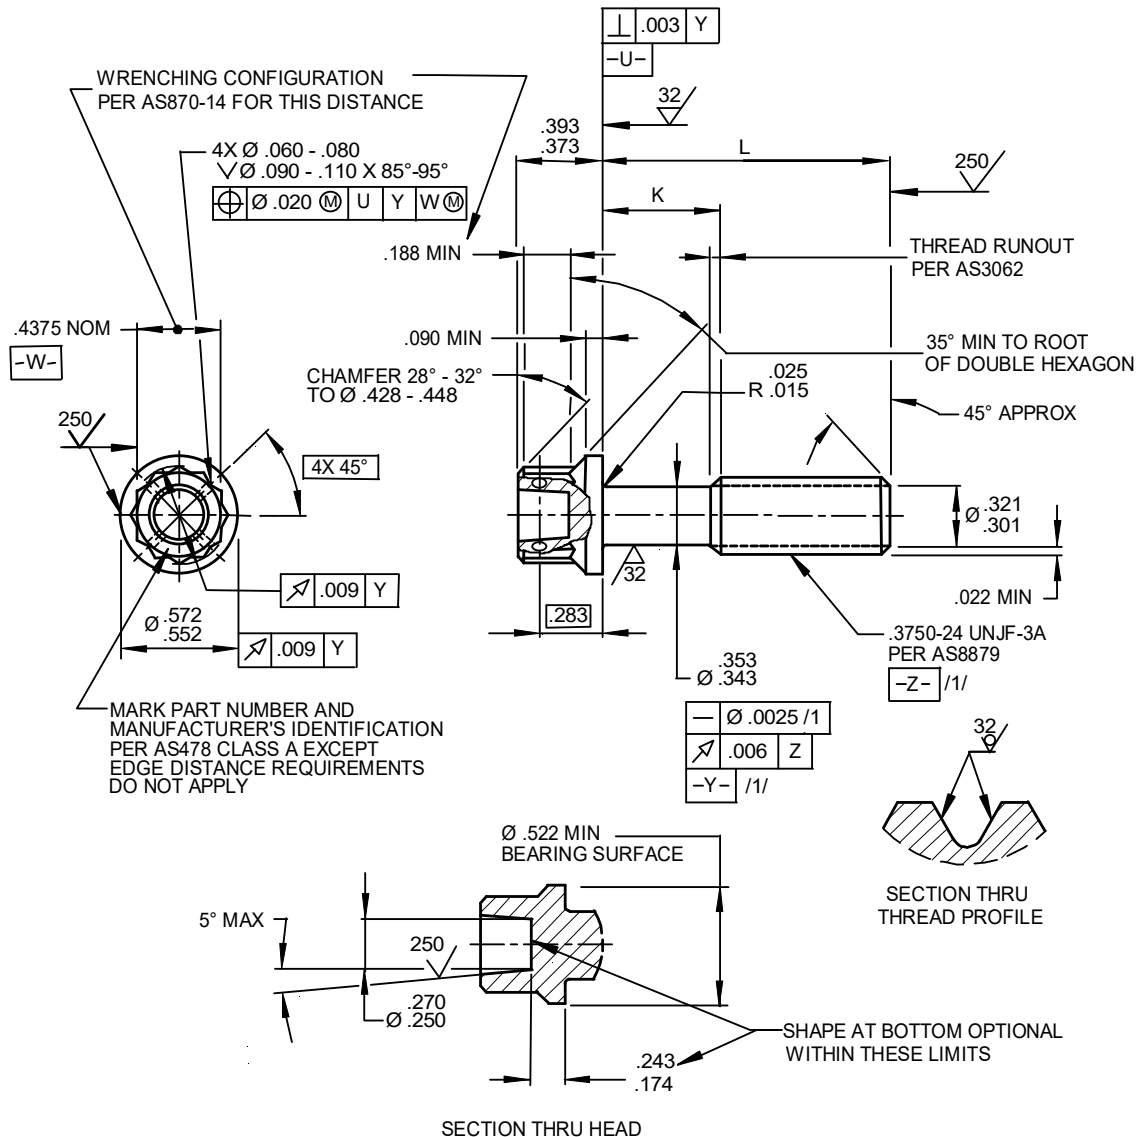


FIGURE 1 - BOLT

For more information on this standard, visit
<https://www.sae.org/standards/content/AS9708/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7471/4/



AEROSPACE STANDARD

SCREW, MACHINE – DOUBLE HEXAGON EXTENDED
WASHER HEAD, DRILLED, NICKEL ALLOY
(UNS N07001), .3750-24 UNJF-3A

AS9708™
SHEET 1 OF 3

Documents

Copyright © 2021 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

SSUED 2021-12

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	L	K	APPROX MASS LB/100	PART NUMBER	L	K	APPROX MASS LB/100
MS9708-04	.615- .635	.088- .108	3.55	MS9708-31	2.740-2.760	1.690-1.750	9.53
MS9708-05	.678- .698	.088- .108	3.78	MS9708-32	2.865-2.885	1.815-1.875	9.88
MS9708-06	.740- .760	.088- .108	3.90	MS9708-33	2.990-3.010	1.940-2.000	10.24
MS9708-07	.802- .822	.088- .108	4.08	MS9708-34	3.115-3.135	2.065-2.125	10.59
MS9708-08	.865- .885	.088- .108	4.25	MS9708-35	3.240-3.260	2.190-2.250	10.94
MS9708-09	.928- .948	.088- .108	4.43	MS9708-36	3.365-3.385	2.315-2.375	11.29
MS9708-10	.990-1.010	.088- .108	4.61	MS9708-37	3.490-3.510	2.440-2.500	11.64
MS9708-11	1.052-1.072	.088- .108	4.78	MS9708-38	3.615-3.635	2.565-2.625	11.99
MS9708-12	1.115-1.135	.088- .125	4.96	MS9708-39	3.740-3.760	2.690-2.750	12.35
MS9708-13	1.178-1.198	.128- .188	5.14	MS9708-40	3.865-3.885	2.815-2.875	12.70
MS9708-14	1.240-1.260	.190- .250	5.31	MS9708-41	3.490-4.010	2.940-3.000	13.05
MS9708-15	1.302-1.322	.252- .312	5.48	MS9708-42	4.115-4.135	3.065-3.125	13.40
MS9708-16	1.365-1.385	.315- .375	5.66	MS9708-43	4.240-4.260	3.190-3.250	13.76
MS9708-17	1.428-1.448	.378- .438	5.84	MS9708-44	4.365-4.385	3.315-3.375	14.11
MS9708-18	1.490-1.510	.440- .500	6.01	MS9708-45	4.490-5.010	3.440-3.500	14.46
MS9708-19	1.552-1.572	.502- .562	6.19	MS9708-46	4.615-4.635	3.565-3.625	14.81
MS9708-20	1.615-1.635	.565- .625	6.36	MS9708-47	4.740-4.760	3.690-3.750	15.16
MS9708-21	1.678-1.698	.628- .688	6.54	MS9708-48	4.865-4.885	3.815-3.875	15.51
MS9708-22	1.740-1.760	.690- .750	6.72	MS9708-49	4.990-5.010	3.940-4.000	15.87
MS9708-23	1.802-1.822	.752- .812	6.89	MS9708-50	5.115-5.135	4.065-4.125	16.22
MS9708-24	1.865-1.885	.815- .875	7.07	MS9708-51	5.240-5.260	4.190-4.250	16.57
MS9708-25	1.990-2.010	.940-1.000	7.42	MS9708-52	5.365-5.385	4.315-4.375	16.92
MS9708-26	2.115-2.135	1.065-1.125	7.77	MS9708-53	5.490-5.010	4.440-4.500	17.27
MS9708-27	2.240-2.260	1.190-1.250	8.13	MS9708-54	5.615-5.635	4.565-4.625	17.62
MS9708-28	2.365-2.385	1.315-1.375	8.48	MS9708-55	5.740-5.760	4.690-4.750	17.98
MS9708-29	2.490-2.510	1.440-1.500	8.83	MS9708-56	5.865-5.885	4.815-4.875	18.33
MS9708-30	2.615-2.635	1.565-1.625	9.18	MS9708-57	5.990-6.010	4.940-5.000	18.68