



SURFACE VEHICLE RECOMMENDED PRACTICE

J1577™

NOV2016

Issued 1991-06
Revised 2006-11
Stabilized 2012-03
Cancelled 2016-11

Superseding J1577 MAR2012

Replaceable Motorcycle Headlamp Bulbs

RATIONALE

This document is to be obsoleted.

Bulbs for headlamps are currently listed in SAE J1496 Replaceable Bulbs for Headlamps. We will review if any SAE J1577 information needs to be included in SAE J1496 next update.

CANCELLATION NOTICE

This Technical Report has been declared "CANCELLED" as of November 2016. By the action, this document will remain listed in the respective index, if applicable. Cancelled Technical Reports are available from SAE.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2016 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
http://www.sae.org

SAE WEB ADDRESS:

Full document details: SAE J1577_201611

SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J1577_201611

Documents

Document Sharing Hub

1. Scope

This SAE Recommended Practice provides performance parameters and dimensional specifications for available light sources (replaceable bulbs) which are appropriate for motorcycle headlamps.

2. References

2.1 *Applicable Publications*

The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J584—Motorcycle Headlamps

2.1.2 ECE PUBLICATIONS

Available from Commission of the European Communities, Rue de la Loi 200, B-1049 Brussels, Belgium, www.europa.eu.int.

ECE Regulation R37—Filament Lamps Used in Approved Lamp Units

3. Definitions

3.1 Replaceable Motorcycle Headlamp Bulb (hereinafter referred to as "bulb" or "bulbs")

A radiant energy source with related envelope and mounting base which is removable from the motorcycle headlamp for the purpose of replacement.

3.2 Seasoning

Process of energizing the filament of a bulb at design voltage for a period of time equal to 1% of design life or 10 h, whichever is shorter.

4. Bulb Type and Specifications

4.1 Table 1 lists each bulb type with its specifications. Bulbs may be added to Table 1 in the future after review.

4.2 All the bulbs shall satisfy the following vibration test requirements.

4.2.1 Bulb shall be seasoned and mounted in a relevant headlamp and photometered to the applicable test points in accordance with Section 4.8 of SAE J584 before the vibration test.

4.2.2 Bulbs shall be mounted on the vibration test machine in their designed operating position.

4.2.3 Conditions of vibration test are shown in Table 2.

TABLE 1—TYPICAL REPLACEABLE MOTORCYCLE HEADLAMP BULBS

Bulb Type	Number of Filaments	Rated Watts	Rated Volts	Design Voltage	Luminous Flux (Lumens Approx.) at D.V.	Max. Wattage at D.V.	Rated Average Laboratory Life at D.V. ⁽¹⁾	Filament Type	Dimensions Fig
H4/HB 2	2	60/55	12/12	13.2	1650 ⁽²⁾⁽³⁾	75/68	450	Axial/Axial	1 - 8
HS1	(U.B./L.B.) 2 (U.B./L.B.)	35/35	12/12	13.2	825 ⁽²⁾⁽³⁾ 525 ⁽²⁾⁽³⁾	36.75/ 36.75	⁽⁴⁾	Axial/Axial	9- 16
H3	1	55	12	13.2	1450 ⁽³⁾	68	500	Transverse	17 - 22

1. The filaments are operated alternately according to the following cycle and starting with the lower beam filament: lower beam filament 15 h on 45 min off, then the upper beam filament 7.5 h on 45 min off; repeat the cycle.

The end of bulb life is determined by failure of either filament. The off periods are not considered as part of the bulb life.

2. With black cap.

3. Tolerances are $\pm 15\%$ for both U.B./L.B.

4. Not determined at this time.

U.B. = upper beam

L.B. = lower beam


D.V. = Designed Volts

TABLE 2—CONDITIONS OF VIBRATION TEST

Wave Form	Sinusoidal
Frequency	50-500-50 Hz at a linear sweep period of two minutes
Acceleration and Direction	98 m/s ² at bulb retaining portion. Vertical
Test Cycle	180 cycles

- 4.2.4 During the vibration test, the upper beam filament and the lower beam filament shall be energized alternately at 1 h intervals at design voltage.
- 4.2.5 Filament(s) shall not fail throughout the test period.
- 4.2.6 After the vibration test, the bulb shall be photometered to the applicable test points in accordance with Section 4.8 of SAE J584. The values shall not vary by more than $\pm 10\%$ from the values measured before the test.

The drawing is not mandatory, their sole purpose is to show which dimensions must be verified.

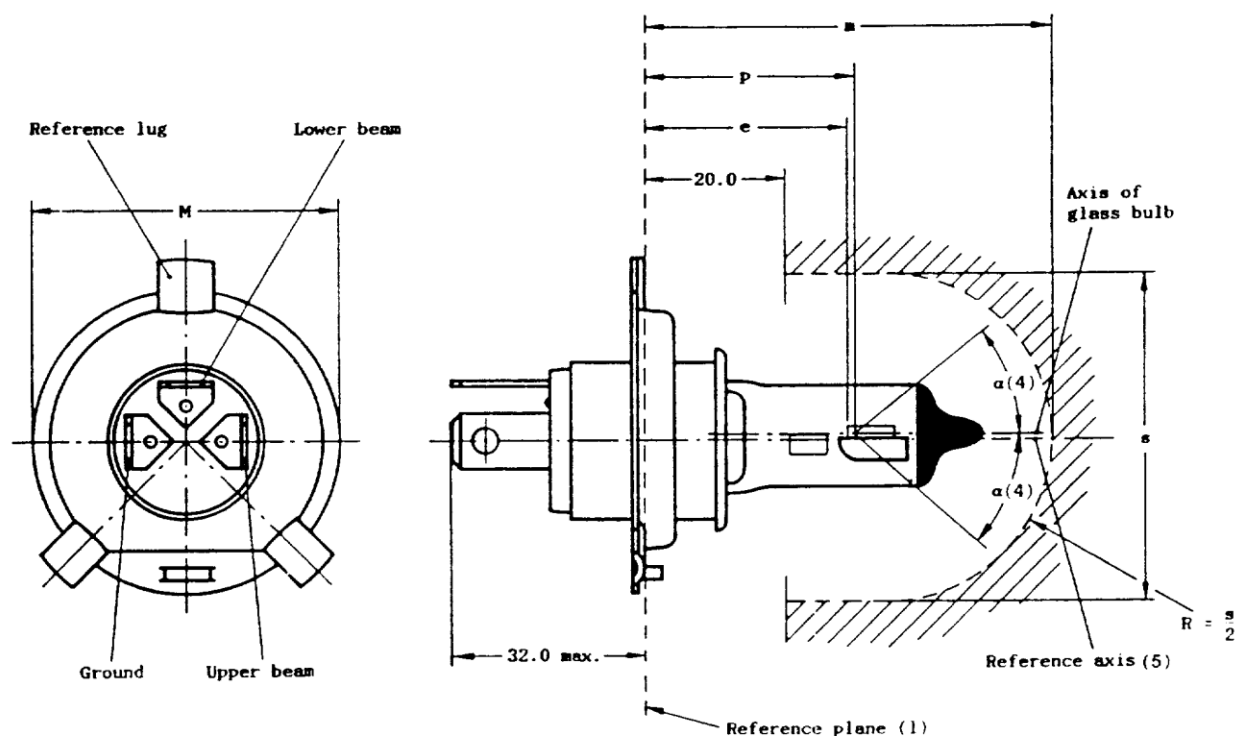

- (1) The reference plane is the plane formed by the seating points of the three lugs of the base ring.
 - (2) "m" denotes the maximum length of the bulb.
 - (3) It must be possible to insert the bulb into a cylinder of diameter "s" concentric with the reference axis and limited at one end by a plane parallel to and 20 mm distance from the reference plane and at the other end by a hemisphere of radius s/2.
 - (4) The obscuration must extend at least as far as the cylindrical part of the glass bulb. It must also overlap the internal shield when the latter is viewed in a direction perpendicular to the reference axis.
The effect sought by the obscuration may also be achieved by other means.*
 - (5) The reference axis is the line perpendicular to the reference plane and passing through the centre of the circle of diameter "M".
- * Not applicable to HB2.

Dimensions in millimeters

Reference	Dimension	Tolerance
e	28.5	+ 0.45 - 0.25
p	28.95	-
m (2)	max. 60.0	-
s (3)	45.0	-
α (4)	max. 40°	-

FIGURE 1—SPECIFICATION FOR THE TYPE H4/HB2 REPLACEABLE BULB

The drawings are not mandatory with respect to the design of the shield.

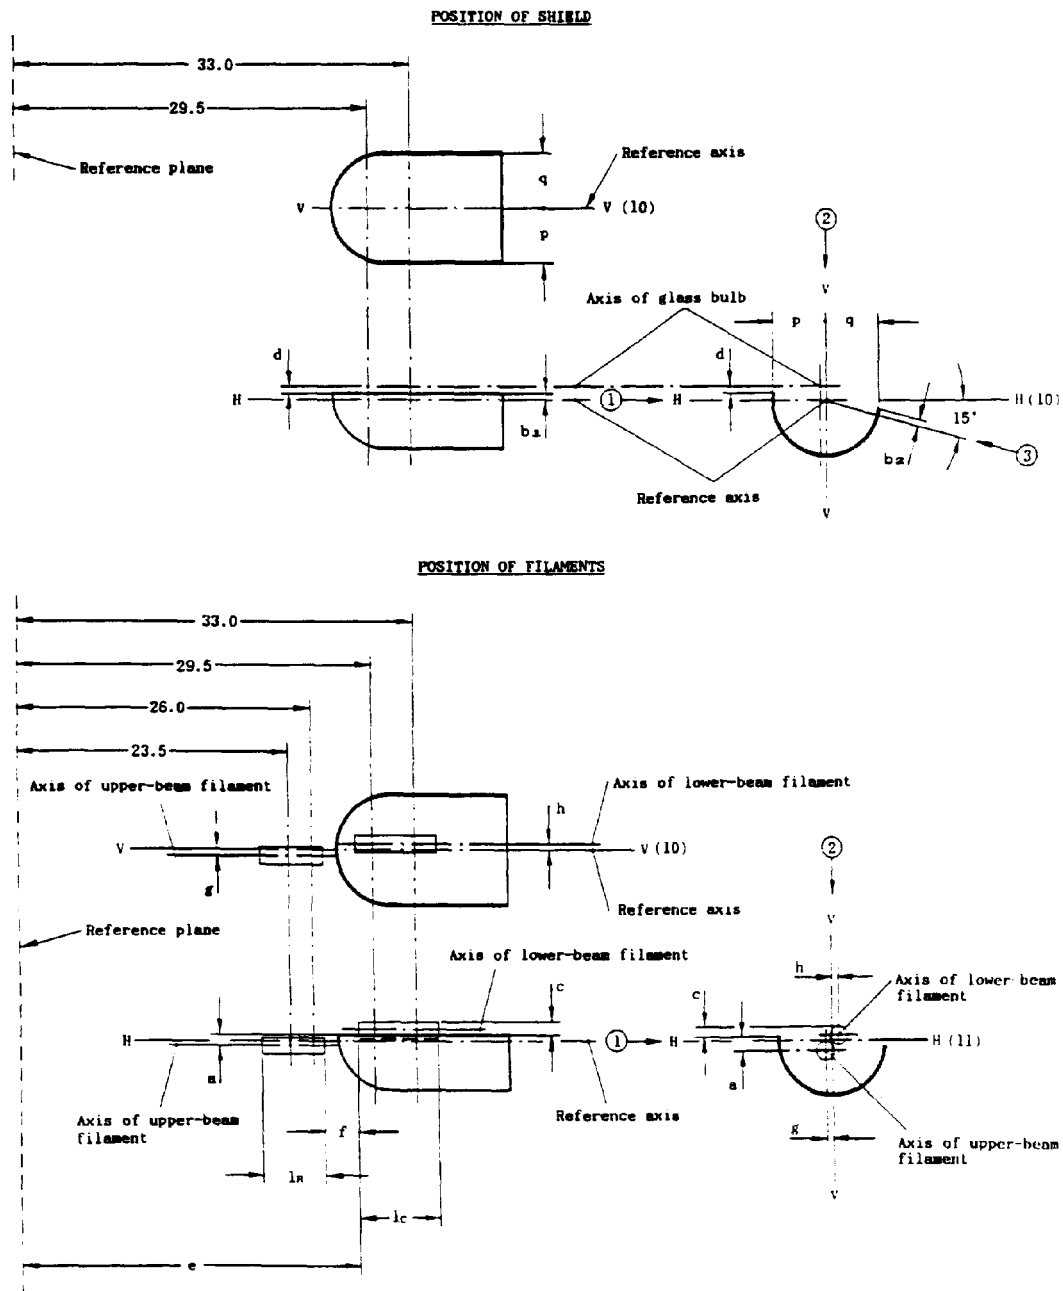


FIGURE 2—SPECIFICATION FOR THE TYPE H4/HB2 REPLACEABLE BULB

Dimensions indicated in Table are measured in three directions:

- Direction ① for dimensions a, b₁, c, d, e, f, l_a and l_c;
 Direction ② for dimensions g, h, p and q;
 Direction ③ for dimension b₂.

Dimensions p and q are measured in a plane parallel to and 33 mm away from the reference plane.

Dimensions b₁, b₂, c and h are measured in planes parallel to and 29.5 mm and 33 mm away from the reference plane.

Dimensions a and g are measured in planes parallel to and 26.0 mm and 23.5 mm away from the reference plane.

- (6) The end turns of the filaments are defined as being the first luminous turn and the last luminous turn that are at substantially the correct helix angle.
 (7) For the lower-beam filament the points to be measured are the intersections, seen in direction ① of the lateral edge of the shield with the outside of the end turns defined under footnote (6).
 (8) "e" denotes the distance from the reference plane to the beginning of the lower-beam filament as defined under footnote (7).
 (9) For the upper-beam filament the points to be measured are the intersections, seen in direction ① of a plane parallel to plane HH and situated at a distance of 0.8 mm below it, with the end turns defined under footnote (6).
 (10) Plane VV is the plane perpendicular to the reference plane and passing through the reference axis and through the intersection of the circle of diameter "M" with the axis of the reference lug.
 (11) Plane HH is the plane perpendicular to both the reference plane and plane VV and passing through the reference axis.

Dimensions in millimeters

Reference	Dimension	Tolerances		
		H4 ***	HB2	
a/26 *	0.8	± 0.35	+ 0.2	+ 0.30
a/23.5 *	0.8	± 0.60	+ 0.2	+ 0.40
b ₁ /29.5 *	0	± 0.30	± 0.2	+ 0.25
b ₁ /33 *	b ₁ /29.5vm **	± 0.30	+ 0.15	+ 0.20
b ₂ /29.5 *	0	± 0.30	± 0.2	+ 0.25
b ₂ /33 *	b ₂ /29.5vm **	± 0.30	± 0.15	+ 0.20
c/29.5 *	0.6	± 0.35	± 0.2	± 0.30
c/33 *	c/29.5vm **	± 0.35	± 0.15	+ 0.30
d	min. 0.1	-	-	-
e (8)	28.5	+ 0.35 - 0.25	+ 0.2 - 0.0	+ 0.35 - 0.15
f (6)(7)(9)	1.7	+ 0.50 - 0.30	+ 0.3 - 0.1	+ 0.30 - 0.30
g/26 *	0	± 0.5	± 0.3	+ 0.4
g/23.5 *	0	+ 0.7	± 0.3	± 0.5
h/29.5 *	0	± 0.5	+ 0.3	+ 0.5
h/33 *	h/29.5vm **	± 0.35	± 0.2	+ 0.35
l _a (6)(9)	4.5	± 0.8	± 0.4	± 0.8
l _c (6)(7)	5.5	+ 0.5	+ 0.35	+ 0.8
p/33 *	Depends on the shape of the shield	-	-	-
q/33 *	$\frac{p+q}{2}$	± 0.6	± 0.3	± 0.6
b ₁ - b ₂	-	-	-	+ 0.25

* Dimension to be measured at the distance from the reference plane indicated in mm after the slash.

** ./29.5vm means the value measured at a distance of 29.5 mm from the reference plane.

*** Left column shows the tolerances for normal production bulbs.
 Right column shows the tolerances for accurate rated bulbs.

FIGURE 3—SPECIFICATION FOR THE TYPE H4/HB2 REPLACEABLE BULB (CONTINUED)

- (1) The form of this annular part of the ring is optional and may be flat or recessed. However, the form shall be such that it will not cause any abnormal glare from the lower beam filament when the bulb is in its normal operating position in the vehicle.
 - (2) This dimension is measured at the reference plane.
 - (3) Dimension M is the diameter on which the bulb is centred.
 - (4) The maximum allowable eccentricity of cylinder L with respect to the circle of diameter M is 0.05 mm.
 - (5) The maximum allowable displacement of the centre of the nose from the line running through the centre of the reference lug and the circle of diameter M is 0.05 mm.
The sides of the nose shall not bend outwards.
 - (6) The relative positions of the contact tabs and the reference lug shall not deviate from the position shown by more than $\pm 20^\circ$.
 - (7) Dimension Q denotes the minimum width over which both the minimum and maximum limits of dimension P shall be observed.
Outside dimension Q, the maximum limit for dimension P shall not be exceeded.
 - (8) The means of securing the ring in the headlamp shall not encroach on this cylindrical zone, which extends over the full length of the shell shown on this side of the ring.
 - (9) The radius r shall be equal to or smaller than dimension U.
 - (10) Beyond distance K, in the direction of the contact tabs, dimension A₂* shall be observed.
- * This dimension is solely for base design and is not to be gauged on the finished lamp.

FIGURE 5—SPECIFICATION FOR THE TYPE H4/HB2 REPLACEABLE BULB BASE P43T-38 (CONTINUED)